


ABBREVIATIONS

A.F.F.	ABOVE FINISHED FLOOR
A.H.U.	AIR HANDLING UNIT
ALUM.	ALUMINUM
ALTERN.	ALTERNATE
APPROX.	APPROXIMATE
BD.	BOARD
BLDG.	BUILDING
BLK.	BLOCK
BLKG.	BLOCKING
BLT.	BUILT
BRK.	BRICK
BRKR.	BREAKER
BSMT.	BASEMENT
C.J.	CONTROL JOINT
CLG.	CEILING
CLR.	CLEAR
CMU	CONCRETE MASONRY UNIT
C.O.	CLEAN OUT
CONC.	CONCRETE
CU.	COPPER
CU. FT.	CUBIC FOOT
CU. IN.	CUBIC INCH
CU. YD.	CUBIC YARD
DIA. /ø	DIAMETER
DBL.	DOUBLE
DBT.	DRY-BULB TEMPERATURE
DEG.	DEGREE
DEPT.	DEPTH
DF.	DRINKING FOUNTAIN
DISC.	DISCONNECT
DL	DEAD LOAD
DN.	DOWN
D.S.	DOWN SPOUT
DWG.	DRAWING
E.F.	EXHAUST FAN
EXH.	EXHAUST
EXP. JT.	EXPANSION JOINT
EXT.	EXTERIOR
FIN	FINISH
FLOR.	FLOOR
FLUOR.	FLUORESCENT
FP	FIRE PLACE
FR.	FIRE RATING
FT.	FOOT/FEET
FTG.	FOOTING
GALV.	GALVANIZED
GFI	GROUND FAULT
INT.	CIRCUIT INTERRUPT
GOV'T.	GOVERNMENT
GR.FL.	GROUND FLOOR
GYP.	GYP-SUM
H.C.	HOLLOW CORE
H.D.G.	HOT DIPPED GALVANIZED
HR.	HEADER
HWAR.	HARDWARE
H.P.	HORSEPOWER
HT.	HEIGHT
HTR.	HEATER
HV.	HIGH VOLTAGE
HVAC.	HEATING, VENTILATING AND AIR CONDITIONING
HWY.	HIGHWAY
ID.	INSIDE DIAMETER
IN.	INCH
INCAND.	INCANDESCENT
INCL.	INCLUDED
INSUL.	INSULATION
INT.	INTERIOR
INV. EL.	INVERT ELEVATION
JST.	JOIST
KD.	KILN DRIED
KW.	KILOWATT
KWH.	KILOWATT HOUR
LAM.	LAMINATED
LAV.	LAVATORY
LB.	POUND
LTS.	LIGHTING
LGTH.	LENGTH
LN.	LINEAR
LL.	LIVE LOAD
MANUF.	MANUFACTURE
MAX.	MAXIMUM
MF.	MIL. FINISH
MIN.	MINIMUM
MOD.	MOLDING
MHW.	MEAN HIGH WATER
MHWK.	MEAN HIGHER HIGH WATER
M.L.W.	MEAN LOW WATER
M.L.WK.	MEAN LOWER LOW WATER
M.S.L.	MEAN SEA LEVEL
MOD.	MODIFICATION
NTS	NOT TO SCALE
NO. /#	NUMBER
OA.	OVERALL
O.C.	ON CENTER
O.D.	OUTSIDE DIAMETER
OPC.	OFFICE
OPP.	OVER HEAD
OPP.	OPPOSITE
PARTN.	PARTITION
PC.	PORTLAND CEMENT
P.C.F.	POUNDS PER CUBIC FOOT
P.E.	PROFESSIONAL ENGINEER
PERF.	PERFORATE
PERP.	PERPENDICULAR
PL.	PLATE
PLG.	PILING
PLYWD.	PLYWOOD
PNL.	PANEL
PREFAB.	PREFABRICATED
PRELIM.	PRELIMINARY
PSF.	POUNDS PER SQUARE FOOT
PSI.	POUNDS PER SQUARE INCH
P.T.	PRESSURE TREATED
QS.	QUARTER SAWN
R.	RADIUS
RCPT.	RECEPTACLE
REBAR.	REINFORCING BAR
REFRIG.	REFRIGERATION
REIN.	REINFORCING
RFG.	ROOFING
ROH.	ROUGH
RM.	ROOM
R.O.	ROUGH OPENING
RS.	ROUGH SAWN
S.C.	SOLID CORE
SCH.	SCHEDULE
SIC.	SIDING
SECT.	SECTION
SECT.	SECTION
SFTWD.	SLIDING GLASS DOOR
SGL.	SLIDING GLASS DOOR
SPEC.	SPECIFICATION
SPR.	SPRINKLER
SQ.	SQUARE
SQ. FT.	SQUARE FOOT
SQ. IN.	SQUARE INCH
SQ. YD.	SQUARE YARD
SS.	STAINLESS STEEL
STL.	STEEL
SUB. FL.	SUBFLOOR
SUP.	SUPPLY
SW.	SWITCH
SYM.	SYMMETRICAL
S.Y.P.	SOUTHERN YELLOW PINE
SYS.	SYSTEM
S4S.	SURFACED FOUR SIDES
TEL.	TELEPHONE
T&G.	TONGUE-AND-GROOVE
TYP.	TYPICAL
U.E.	UNDERGROUND ELECTRIC
U.G.	UNDER GROUND
UL.	UNDERWRITERS LABORATORIES, INC.
V.	VOLT
VENT.	VENTILATOR
VERT.	VERTICAL
VIF.	VERIFY IN FIELD
VOL.	VOLUME
VPI.	VENT PIPE
VTR.	VENT THRU ROOF
W.	WATER
WBT.	WET BULB TEMPERATURE
WC.	WATER CLOSET
WD.	WOOD
WP.	WATERPROOF
WWF.	WELDED WIRE FABRIC
YD.	YARD

REFERENCE LEGEND

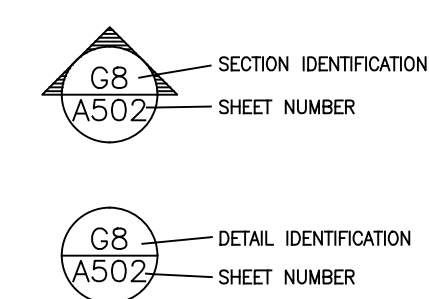

WINDLEY KEY FOSSIL STATE PARK

DISTRICT 5
MONROE COUNTY

VISITOR CENTER AND
ADA IMPROVEMENTS

PROJECT # 61531C

APPLICABLE CODES AND DESIGN DATA

CODE LIST

FLORIDA BUILDING CODE, BUILDING (FBC-B).....	2023 Edition
FLORIDA BUILDING CODE, FUEL GAS (FBC-FG).....	2023 Edition
FLORIDA BUILDING CODE, MECHANICAL (FBC-M).....	2023 Edition
FLORIDA BUILDING CODE, PLUMBING (FBC-P).....	2023 Edition
FLORIDA BUILDING CODE, EXISTING BUILDING (FBC-EB).....	2023 Edition
FLORIDA BUILDING CODE, RESIDENTIAL (FBC-R).....	2023 Edition
FLORIDA FIRE PREVENTION CODE (FFPC).....	2023 Edition
NATIONAL ELECTRICAL CODE NFPA-70.....	2020 Edition
FDOT STANDARD SPECIFICATIONS FOR ROAD & BRIDGE CONST.	Latest Edition
FDOT DESIGN STANDARDS.....	Latest Edition
FLORIDA ACCESSIBILITY CODE.....	2023 Edition

DESIGN DATA

CONSTRUCTION TYPE:	_____	TOTAL BUILDING AREA PER FLOOR:	_____
OCCUPANCY CLASS:	_____	BUILDING HEIGHT/NUMBER OF STORIES:	_____
OCCUPANT LOAD:	_____	REQUIRED SPRINKLER OR ALARM SYSTEM:	Yes / No
TOTAL EXITS:	_____	NUMBER OF BEDROOMS:	_____
SQ FT ALTERED AREA	_____	LEVEL OF ALTERATION:	_____

DESIGN LOADS (FBC-B CHAPTER 16):

WIND LOADS (FBC-B SECTION 1609):

LIFE SAFETY PLAN:

DISTRICT 1

DISTRICT 2

DISTRICT 3


DISTRICT 4

DISTRICT 5

INDEX OF DRAWINGS

CVR	COVER SHEET
G100	GENERAL NOTES
C100	EXISTING CONDITIONS
C101	SITE PLAN
C200	GRADING PLAN
C201	PLAN & PROFILE – PORCH WALKWAY
C202	PLAN & PROFILE – PIT BOARDWALK
C500	CONSTRUCTION DETAILS
LS001	LIFE SAFETY PLAN & LEGENDS
A101	DEMO FLOOR PLAN
A102	NEW FLOOR PLAN
A103	DEMO REFLECTED CEILING PLAN
A104	NEW REFLECTED CEILING PLAN
A201	EXTERIOR ELEVATIONS
A301	BUILDING SECTIONS
A302	WALL SECTIONS
A401	INTERIOR ELEVATIONS
A501	STOREFRONT & DOOR DETAILS
A601	SCHEDULES
S000	COVER SHEET
S001	ABBREVIATIONS & SYMBOLS
S002	STRUCTURAL NOTES
S003	STRUCTURAL NOTES
S004	STRUCTURAL PLAN SPECIFICATIONS
S011	WALL WIND DIAGRAMS
S101	GROUND FLOOR PLAN
S102	BOARDWALK FRAMING PLAN
S201	BOARDWALK ELEVATIONS
S501	TYPICAL SCHEDULES
S511	TYPICAL DETAILS
S512	WOOD DOCK & DECK DETAILS
M001	MECHANICAL GENERAL NOTES AND LEGENDS
M101	MECHANICAL DEMOLITION PLAN
M102	MECHANICAL NEW WORK PLAN
M501	MECHANICAL DETAILS AND SCHEDULES
E001	ELECTRICAL GENERAL NOTES AND LEGEND
E101	ELECTRICAL DEMOLITION PLAN
E102	ELECTRICAL NEW WORK PLAN
E501	ELECTRICAL DETAILS
E701	ELECTRICAL PANEL SCHEDULES
P001	PLUMBING NOTES AND LEGEND
P101	PLUMBING DEMOLITION PLAN
P102	PLUMBING NEW WORK PLAN
P701	PLUMBING SCHEDULES

Project Location

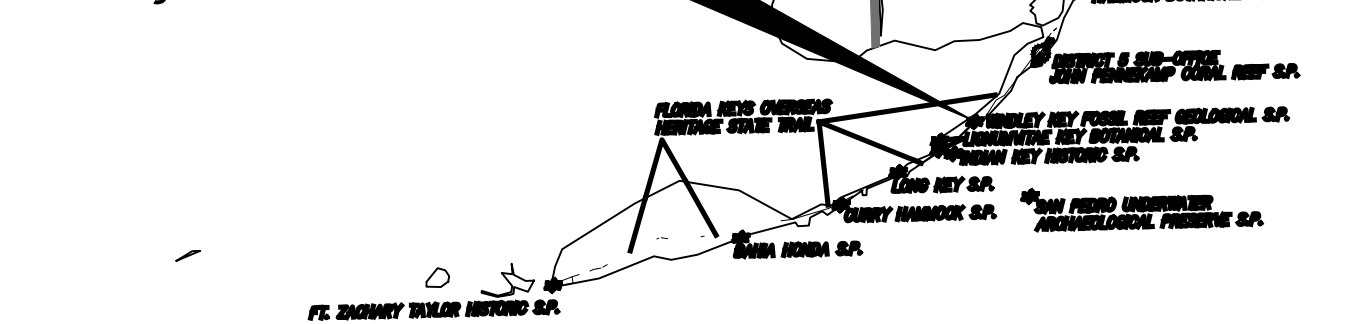

HYDRA ENGINEERING & CONSTRUCTION, LLC
DESIGNER

CN306
CONSULTANT CONTRACT No.

02/25/2025
INITIAL ISSUE DATE

This document has been digitally signed and sealed by Leslie Weiss on the date adjacent to the seal. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.



WINDLEY KEY FOSSIL SP
VISITOR CENTER & ADA IMPROVEMENTS

GENERAL NOTES:

1. THE CONTRACTOR IS RESPONSIBLE FOR INSPECTING AND ACCEPTING THE EXISTING CONDITIONS OF THE SITE PRIOR TO BIDDING.

2. ALL DISTURBED AREAS WITHIN THE LIMITS OF RESTORATION SHALL BE REVEGETATED AS SPECIFIED BY THE PARK SERVICE BIOLOGIST.

3. EXISTING UNDERGROUND UTILITIES SHOWN ARE BASED ON THE BEST AVAILABLE INFORMATION. THE CONTRACTOR SHALL ENSURE THAT THE UTILITY SYSTEMS DO NOT CONFLICT WITH THE PROPOSED PROJECT. CONFLICTS SHALL BE REPORTED TO THE PROJECT MANAGER IMMEDIATELY.

4. THE CONTRACTOR IS RESPONSIBLE FOR THE PROTECTION OF ALL UTILITIES. REMOVAL AND/OR RELOCATION OF EXISTING UTILITIES IN CONFLICT WITH THE WORK, CONSTRUCTION OF TEMPORARY UTILITIES IN THE EVENT THAT EXISTING UTILITY SERVICE MUST BE INTERRUPTED AND ANY OTHER CONSTRUCTION RELATED ACTIVITIES THAT MAY AFFECT EXISTING OR PROPOSED UTILITIES. THE INFORMATION SHOWN ON THESE DRAWINGS CONCERNING TYPE AND LOCATION OF UNDERGROUND AND OTHER UTILITIES IS BASED ON INFORMATION PROVIDED BY THE UTILITY OWNERS, AVAILABLE RECORDS, AND SURVEYED FIELD INFORMATION. THE INFORMATION MAY NOT REFLECT ACTUAL CONDITIONS, INCLUDE ALL UTILITIES IN THE AREA, EITHER IN SERVICE OR ABANDONED, OR SHOW THE UTILITIES IN THE CORRECT HORIZONTAL OR VERTICAL LOCATIONS. THE CONTRACTOR WILL MAKE IS OWN DETERMINATION AS TO THE TYPE AND LOCATION OF UTILITIES AS NECESSARY TO ESTABLISH THEIR LOCATIONS AND AVOID DAMAGE.

5. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ESTABLISHING ALL GRADE STAKES, LINES AND LEVELS.

6. THE CONTRACTOR SHALL SOLID SOD ALL DISTURBED AREAS UNLESS OTHERWISE SPECIFIED OR SHOWN. NO SOD WITH MONOFILAMENT OR PLASTIC MESH BACKING WILL BE ALLOWED.

7. NO SEPARATE PAYMENT WILL BE MADE FOR DEWATERING. THE COSTS FOR DEWATERING ARE INCLUDED IN THE UNIT PRICES FOR CONSTRUCTING THIS PROJECT.

8. ALL AREAS, STREETS, DRIVEWAYS, PARKING LOTS, ETC. DISTURBED BY CONSTRUCTION SHALL BE RESTORED BY THE CONTRACTOR TO THEIR ORIGINAL OR BETTER CONDITION.

9. THE CONTRACTOR WILL HAVE ALL REQUIRED PERMITS IN-HAND PRIOR TO BEGINNING CONSTRUCTION, AND WILL PERFORM ALL WORK IN ACCORDANCE WITH THE REQUIREMENTS OF THE PERMITS OBTAINED BY THE OWNER AND THOSE PERMITS OBTAINED BY THE CONTRACTOR.

10. PRIOR TO COMMENCING CONSTRUCTION, THE CONTRACTOR WILL SUBMIT TO THE OWNER’S PROJECT MANAGER A SCHEDULE OF VALUES, A CONSTRUCTION SCHEDULE, AND A SAFETY PLAN.

11. THE CONSTRUCTION SCHEDULE WILL DESCRIBE IN DETAIL HOW THE CONSTRUCTION IS TO BE PHASED, ESTABLISH START AND FINISH DATES FOR ALL SIGNIFICANT CONSTRUCTION ACTIVITIES, AND IDENTIFY ALL CONTROLLING ITEMS OF WORK. THE SCHEDULE IS TO BE APPROVED BY THE OWNER’S PROJECT MANAGER, AND WILL BE UPDATED ON A MONTHLY BASIS TO REFLECT ACTUAL WORK PROGRESS. PAYMENT FOR PREPARING, UPDATING AND SUBMITTING THE SCHEDULE WILL BE INCLUDED IN THE PAY ITEM FOR MOBILIZATION OR OTHER PAY ITEMS AS APPROPRIATE.

12. THE CONTRACTOR SHALL SUBMIT AN EROSION CONTROL PLAN FOR APPROVAL BY THE OWNER’S PROJECT MANAGER AND WILL ADDRESS THE INSTALLATION AND MAINTENANCE OF ALL TEMPORARY AND PERMANENT SEDIMENT AND EROSION CONTROL DEVICES TO BE USED DURING EACH PHASE OF CONSTRUCTION, INCLUDING TREE REMOVAL, CLEARING AND GRUBBING, EXCAVATION, HAULING OF EXCAVATED MATERIALS, AND PLACEMENT OF EMBANKMENT AND BACKFILL. THE PLAN ALSO WILL DETAIL THE EROSION CONTROL MEASURES TO BE EMPLOYED AT ALL STOCKPILE AND CONSTRUCTION STAGING AREAS AND WILL DEFINE THE MAXIMUM LIMITS OF ALL ACTIVE CONSTRUCTION ZONES.

13. ANY NATIONAL GEODETIC SURVEY MONUMENT WITHIN THE LIMITS OF CONSTRUCTION MUST BE PROTECTED. IF IN DANGER OF DAMAGE, THE CONTRACTOR WILL IMMEDIATELY NOTIFY THE PROJECT MANAGER AND:

FDEP, BUREAU OF SURVEY AND MAPPING, MS 105
3900 COMMONWEALTH BLVD.
TALLAHASSEE, FLORIDA 32399
(850) 245–2606 (OFFICE)
(850) 245–2645 (FAX)

14. PRIOR TO ANY SCHEDULED INTERRUPTION OF UTILITY SERVICE, THE CONTRACTOR WILL COORDINATE SUCH INTERRUPTION WITH THE UTILITY PROVIDER AND WILL PROVIDE A MINIMUM 24-HOUR NOTICE TO THE AFFECTED PARTIES. THE CONTRACTOR WILL NOTIFY THE ELECTRIC UTILITY A MINIMUM OF TWO WEEKS PRIOR TO CONSTRUCTION IN THE VICINITY OF THEIR FACILITIES.

15. NO TRENCHES WILL BE ALLOWED TO REMAIN OPEN OVERNIGHT.

16. THE CONTRACTOR IS RESPONSIBLE FOR THE PROTECTION OF VEGETATION ON AND ADJACENT TO THE PROJECT SITE, AND WILL BE SOLELY LIABLE FOR DAMAGE TO VEGETATION ON PROPERTIES ADJACENT TO CONSTRUCTION WORK ZONES. ALL TREES WITHIN THE LIMITS OF CONSTRUCTION ARE TO BE PROTECTED EXCEPT THOSE TREES IDENTIFIED ON THE PLANS TO BE REMOVED. ALL TREES OUTSIDE THE CONSTRUCTION WORK ZONE ARE TO BE PROTECTED TO THE MAXIMUM EXTENT PRACTICABLE. TREE BARRICADES WILL BE INSTALLED AND MAINTAINED AROUND ALL TREES TO BE PROTECTED AS SHOWN ON THE DRAWINGS OR AS DIRECTED BY THE PROJECT MANAGER.

17. THE CONTRACTOR IS RESPONSIBLE TO PLACE AND MAINTAIN ROADSIDE WARNING SIGNS WHEN WORK IS BEING CONDUCTED IN THE PROPERTY RIGHT OF WAY OR WHEN MACHINERY IS ENTERING AND LEAVING THE PROJECT SITE.

18. THE CONTRACTOR IS RESPONSIBLE FOR DISPOSAL OF EXCAVATED MATERIAL OFF–SITE UNLESS OTHERWISE DIRECTED BY THE PROJECT MANAGER.

19. ENSURE THAT ALL EQUIPMENT, PRIOR TO BRINGING ON–SITE, IS WASHED AND FREE OF SOIL, SEED, OR OTHER ORGANIC MATTER. EQUIPMENT MAY BE INSPECTED BY THE OWNER’S REPRESENTATIVE PRIOR TO OFF–LOADING FOR USE. ADDITIONAL CLEANING WILL BE PERFORMED OFFSITE BY THE CONTRACTOR IF THE OWNER’S REPRESENTATIVE DETERMINES IT IS NEEDED.

EROSION CONTROL NOTES:

1. ALL EROSION AND SEDIMENTATION CONTROLS SHALL BE INSTALLED PRIOR TO ANY LAND DISTURBING ACTIVITIES.

2. ALL EROSION AND SEDIMENTATION CONTROLS SHALL BE INSPECTED DAILY AND REPAIRS MADE AS NECESSARY TO ENSURE THE PROPER AND CONTINUED FUNCTION OF THE CONTROL(S).

3. ALL EROSION AND SEDIMENTATION CONTROL SHALL REMAIN IN PLACE UNTIL A PERMANENT VEGETATIVE COVER HAS BEEN ESTABLISHED.

4. UNDER NO CIRCUMSTANCES SHALL SEDIMENTS BE PERMITTED TO EXIT THE PROJECT LIMITS, INCLUDING TRACKING BY VEHICLES ONTO PAVED ROADWAYS. THE CONTRACTOR SHALL MAKE IMMEDIATE REPAIRS OR ENHANCEMENTS TO ANY EROSION CONTROL SYSTEM THAT ALLOWS THE RELEASE OF SEDIMENTS.

PROJECT SPECIFIC NOTES:

1. THIS PROJECT SHALL COMPLY WITH THE "FLORIDA DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION", FY 2025–26. THE FOLLOWING SPECIFICATION SECTIONS APPLY:

102 – MAINTENANCE OF TRAFFIC

110 – CLEARING AND GRUBBING

347 – PORTLAND CEMENT CONCRETE (NS)

2. BENCHMARK DATA IS THE NORTH AMERICAN VERTICAL DATUM 1988 (NAVD88).

3. CONTRACTOR TO PROVIDE FDEP PARK PERSONNEL 2 WEEKS ADVANCE NOTICE PRIOR TO STARTING CONSTRUCTION ACTIVITIES.

4. LOCAL PERMITTING REQUIREMENTS THROUGH MONROE COUNTY SHALL BE DISCUSSED AND STATED FOR PERMIT ISSUANCE AT TIME OF PRE–BID.

WINDLEY KEY FOSSIL STATE PARK		DATE	REVISION	SYMBOL	DATE	REVISION	SYMBOL
SHEET TITLE							
GENERAL NOTES		Department of Environmental Protection Division of Recreation and Parks Bureau of Design and Construction					
PROJECT TITLE		3800 Commonwealth Blvd., Tallahassee, FL 32399 (850) 245-2157					
SHEET NO.		G100					

PROFESSIONAL REGISTRATION
LESLIE WEISS
State of Florida P.E.# 56452

DESIGNER : LAW

DRAWN BY: AEB

REVIEWED BY: LAW

ISSUE DATE: 02/25/2025

COMP. FILE No.: 61531C

STATE PROJECT No.: 61531C

HYDRA ENGINEERING & CONSTRUCTION, LLC

36 Jasper Thomas Road
Tallahassee, Florida 32309
Phone (850) 926-2593
Fax (850) 926-9257
www.hydrac.com
Florida CA#26124

This document has been digitally signed and sealed by Leslie Weiss on the date adjacent to the seal. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

CONNECT TO EXISTING PORCH
(SEE ARCHITECTURAL PLANS
FOR DETAILS)

PROPOSED ELEVATED
WOODEN ADA RAMP
(SEE STRUCTURAL
PLANS FOR BOARDWALK
DETAILS)

EXISTING TREES
TO BE RELOCATED
BY THE PARK


EXISTING LIMEROCK
TO BE REMOVED BY
CONTRACTOR FOR
NEW CONSTRUCTION

PROPOSED CONCRETE
ADA PATH

PROPOSED NEW
IRON RANGER
LOCATION

PROPOSED ELEVATED
WOODEN ADA RAMP
(SEE STRUCTURAL
PLANS FOR BOARDWALK
DETAILS)

PROPOSED ELEVATED
WOODEN ADA RAMP
HANDRAILS EXTENSIONS

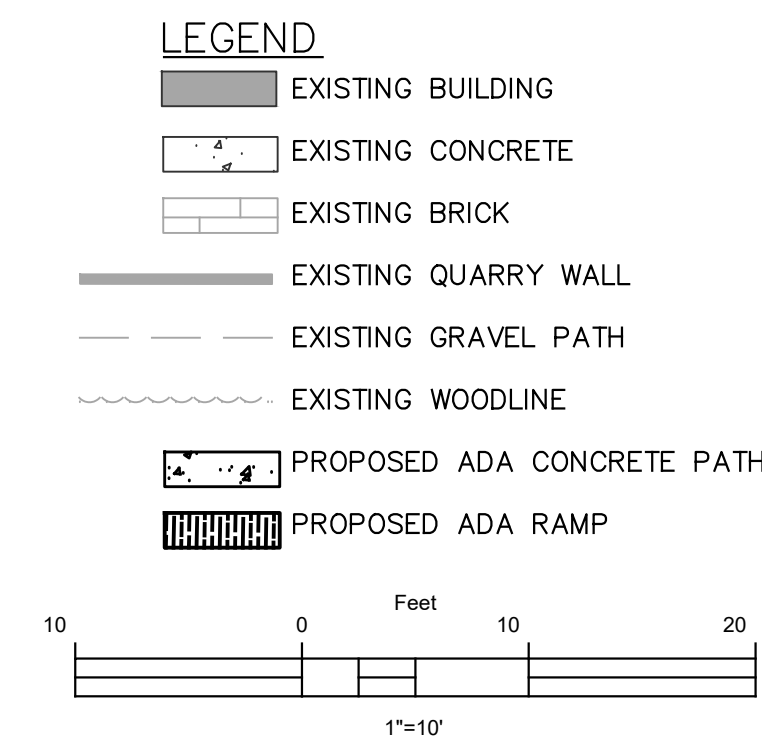

SHEET NO.	WINDLEY KEY FOSSIL STATE PARK	PROFESSIONAL REGISTRATION State of Florida P.E.# 56452	DESIGNER :	LAW	ISSUE DATE:	02/25/2025	SYMBOL		DATE		REVISION		DATE	
			DRAWN BY:	AEB	COMP. FILE No.:									
	SITE PLAN	VISITOR CENTER & ADA IMPROVEMENTS	REVIEWED BY:	LAW	STATE PROJECT No.:	61531C								
			Consultant :	HYDRA ENGINEERING & CONSTRUCTION, LLC 36 Jasper Thomas Road Gowfordville, FL 32327 Phone (850) 926-2593 Fax (850) 926-9257 www.hydrac.com Florida CA#26124  Department of Environmental Protection Division of Recreation and Parks Bureau of Design and Construction 3800 Commonwealth Blvd., Tallahassee, FL 32399 (850) 245-2157										

This document has been digitally signed and sealed by
Leslie Weiss on the date adjacent to the seal. Printed
copies of this document are not considered signed and
sealed and the signature must be verified on any
electronic copies.

C101

CONNECT TO EXISTING PORCH
(SEE ARCHITECTURAL PLANS
FOR DETAILS)

PROPOSED ELEVATED
WOODEN ADA RAMP
(SEE STRUCTURAL
PLANS FOR BOARDWALK
DETAILS)

EXISTING TREES
TO BE RELOCATED
BY THE PARK


EXISTING LIMEROCK
TO BE REMOVED BY
CONTRACTOR FOR
NEW CONSTRUCTION

PROPOSED CONCRETE
ADA PATH

PROPOSED NEW
IRON RANGER
LOCATION

PROPOSED ELEVATED
WOODEN ADA RAMP
(SEE STRUCTURAL
PLANS FOR BOARDWALK
DETAILS)



PROPOSED ELEVATED
WOODEN ADA RAMP
HANDRAILS EXTENSIONS

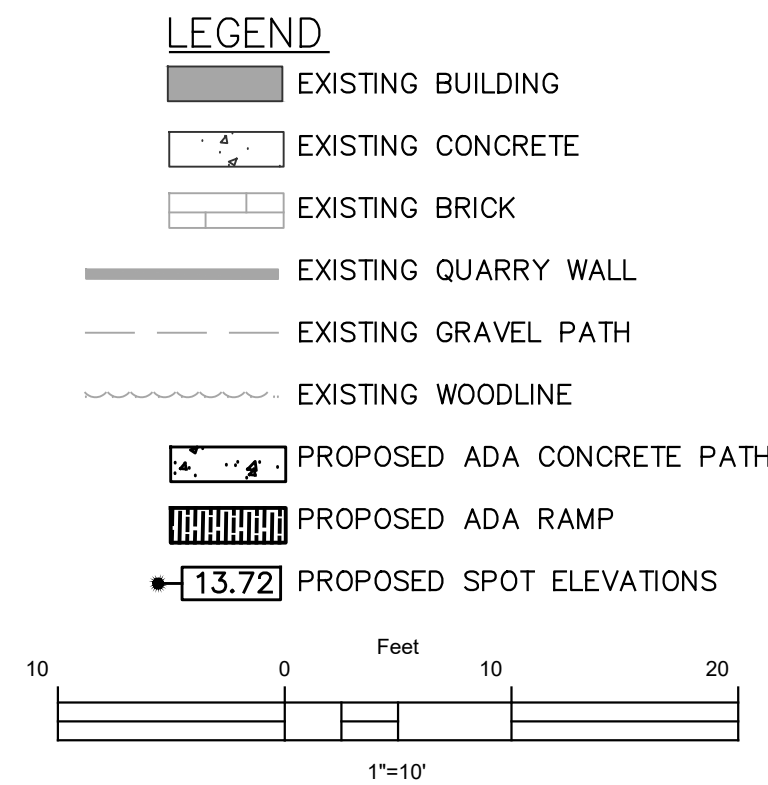


SHEET NO.	WINDLEY KEY FOSSIL STATE PARK	PROFESSIONAL REGISTRATION LESLIE A. WEISS State of Florida P.E.# 56452	DESIGNER : LAW	ISSUE DATE: 02/25/2025	SYMBOL	REVISION	DATE
		DRAWN BY: AEB	COMP. FILE No.: STATE PROJECT No.: 61531C	A	C		
	GRADING PLAN	VISITOR CENTER & ADA IMPROVEMENTS	REVIEWED BY: LAW		B	D	
			Consultant : 36 Jasper Thomas Road Graftonville, FL 32327 Phone (850) 926-2593 Fax (850) 926-9257 www.hydrac.com Florida CA#26124		Department of Environmental Protection Division of Recreation and Parks Bureau of Design and Construction 3800 Commonwealth Blvd., Tallahassee, FL 32399 (850) 245-2157		

This document has been digitally signed and sealed by
Leslie Weiss on the date adjacent to the seal. Printed
copies of this document are not considered signed and
sealed and the signature must be verified on any
electronic copies.

C200

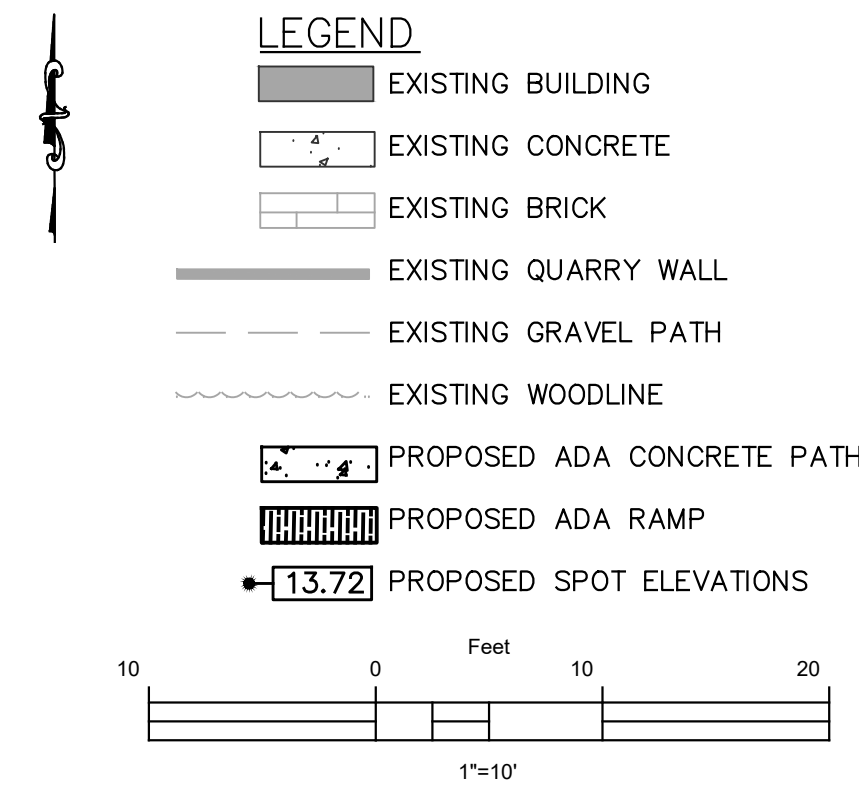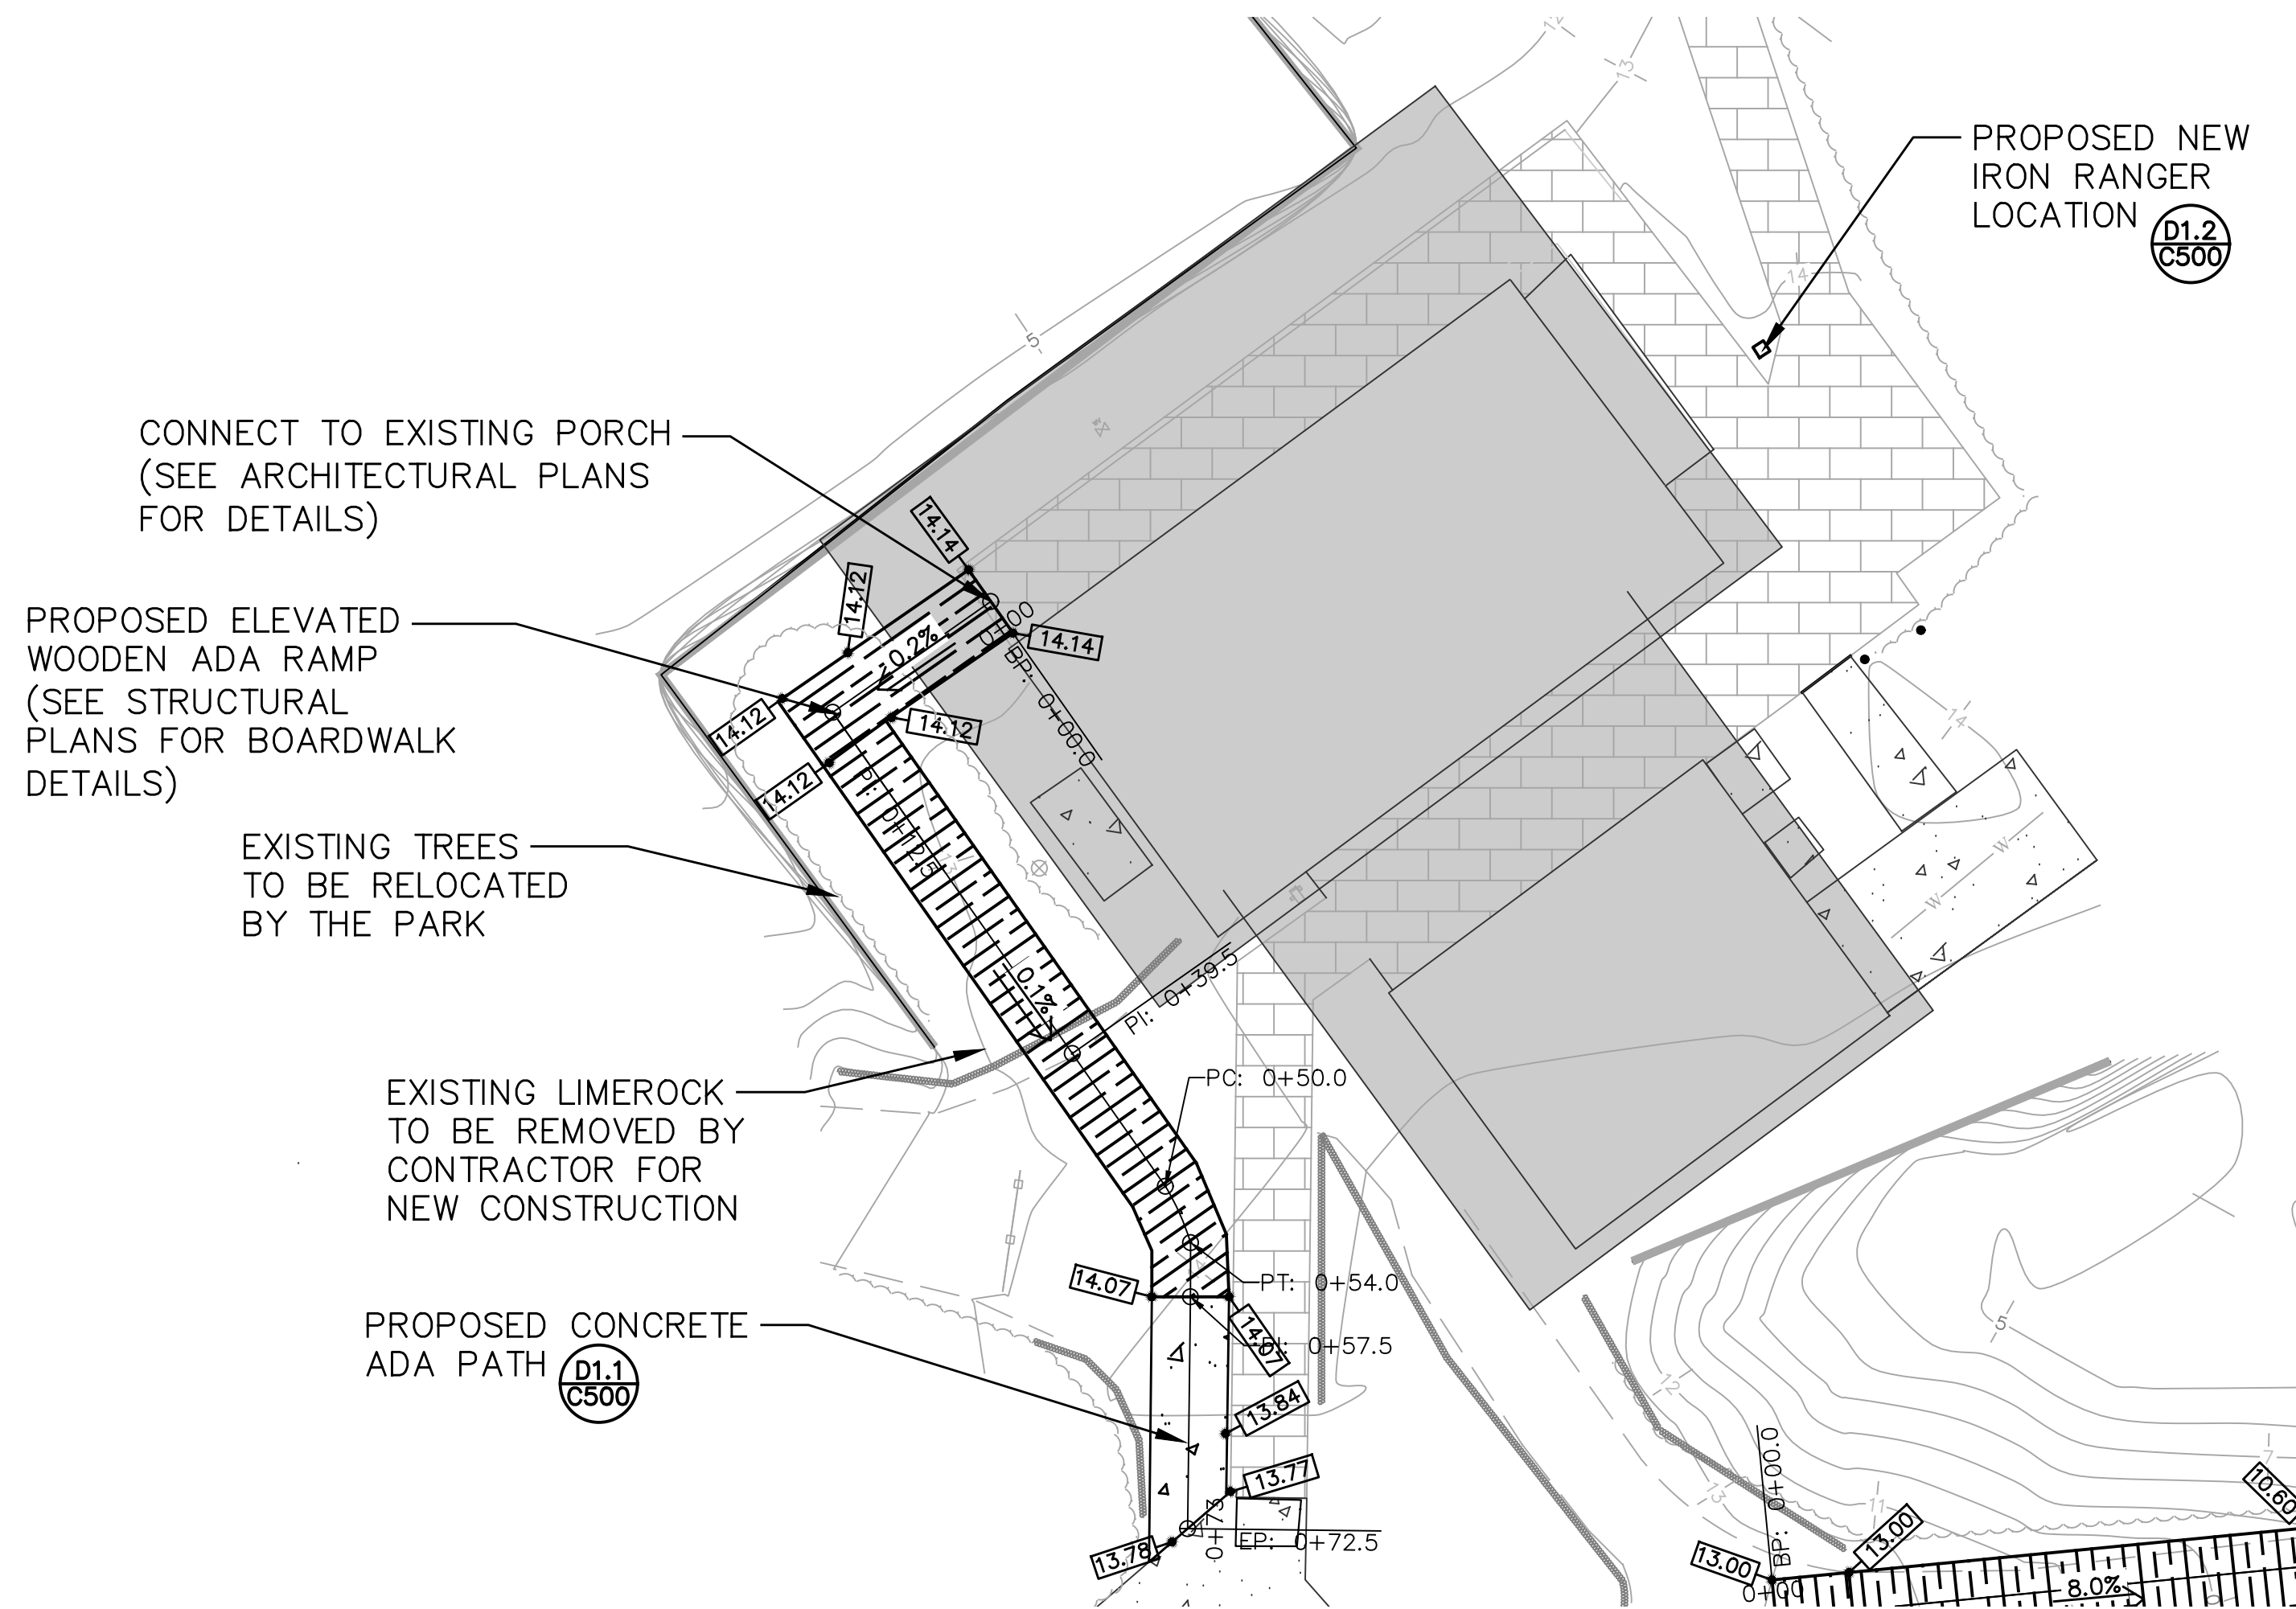


Porch Walkway Alignment Profile

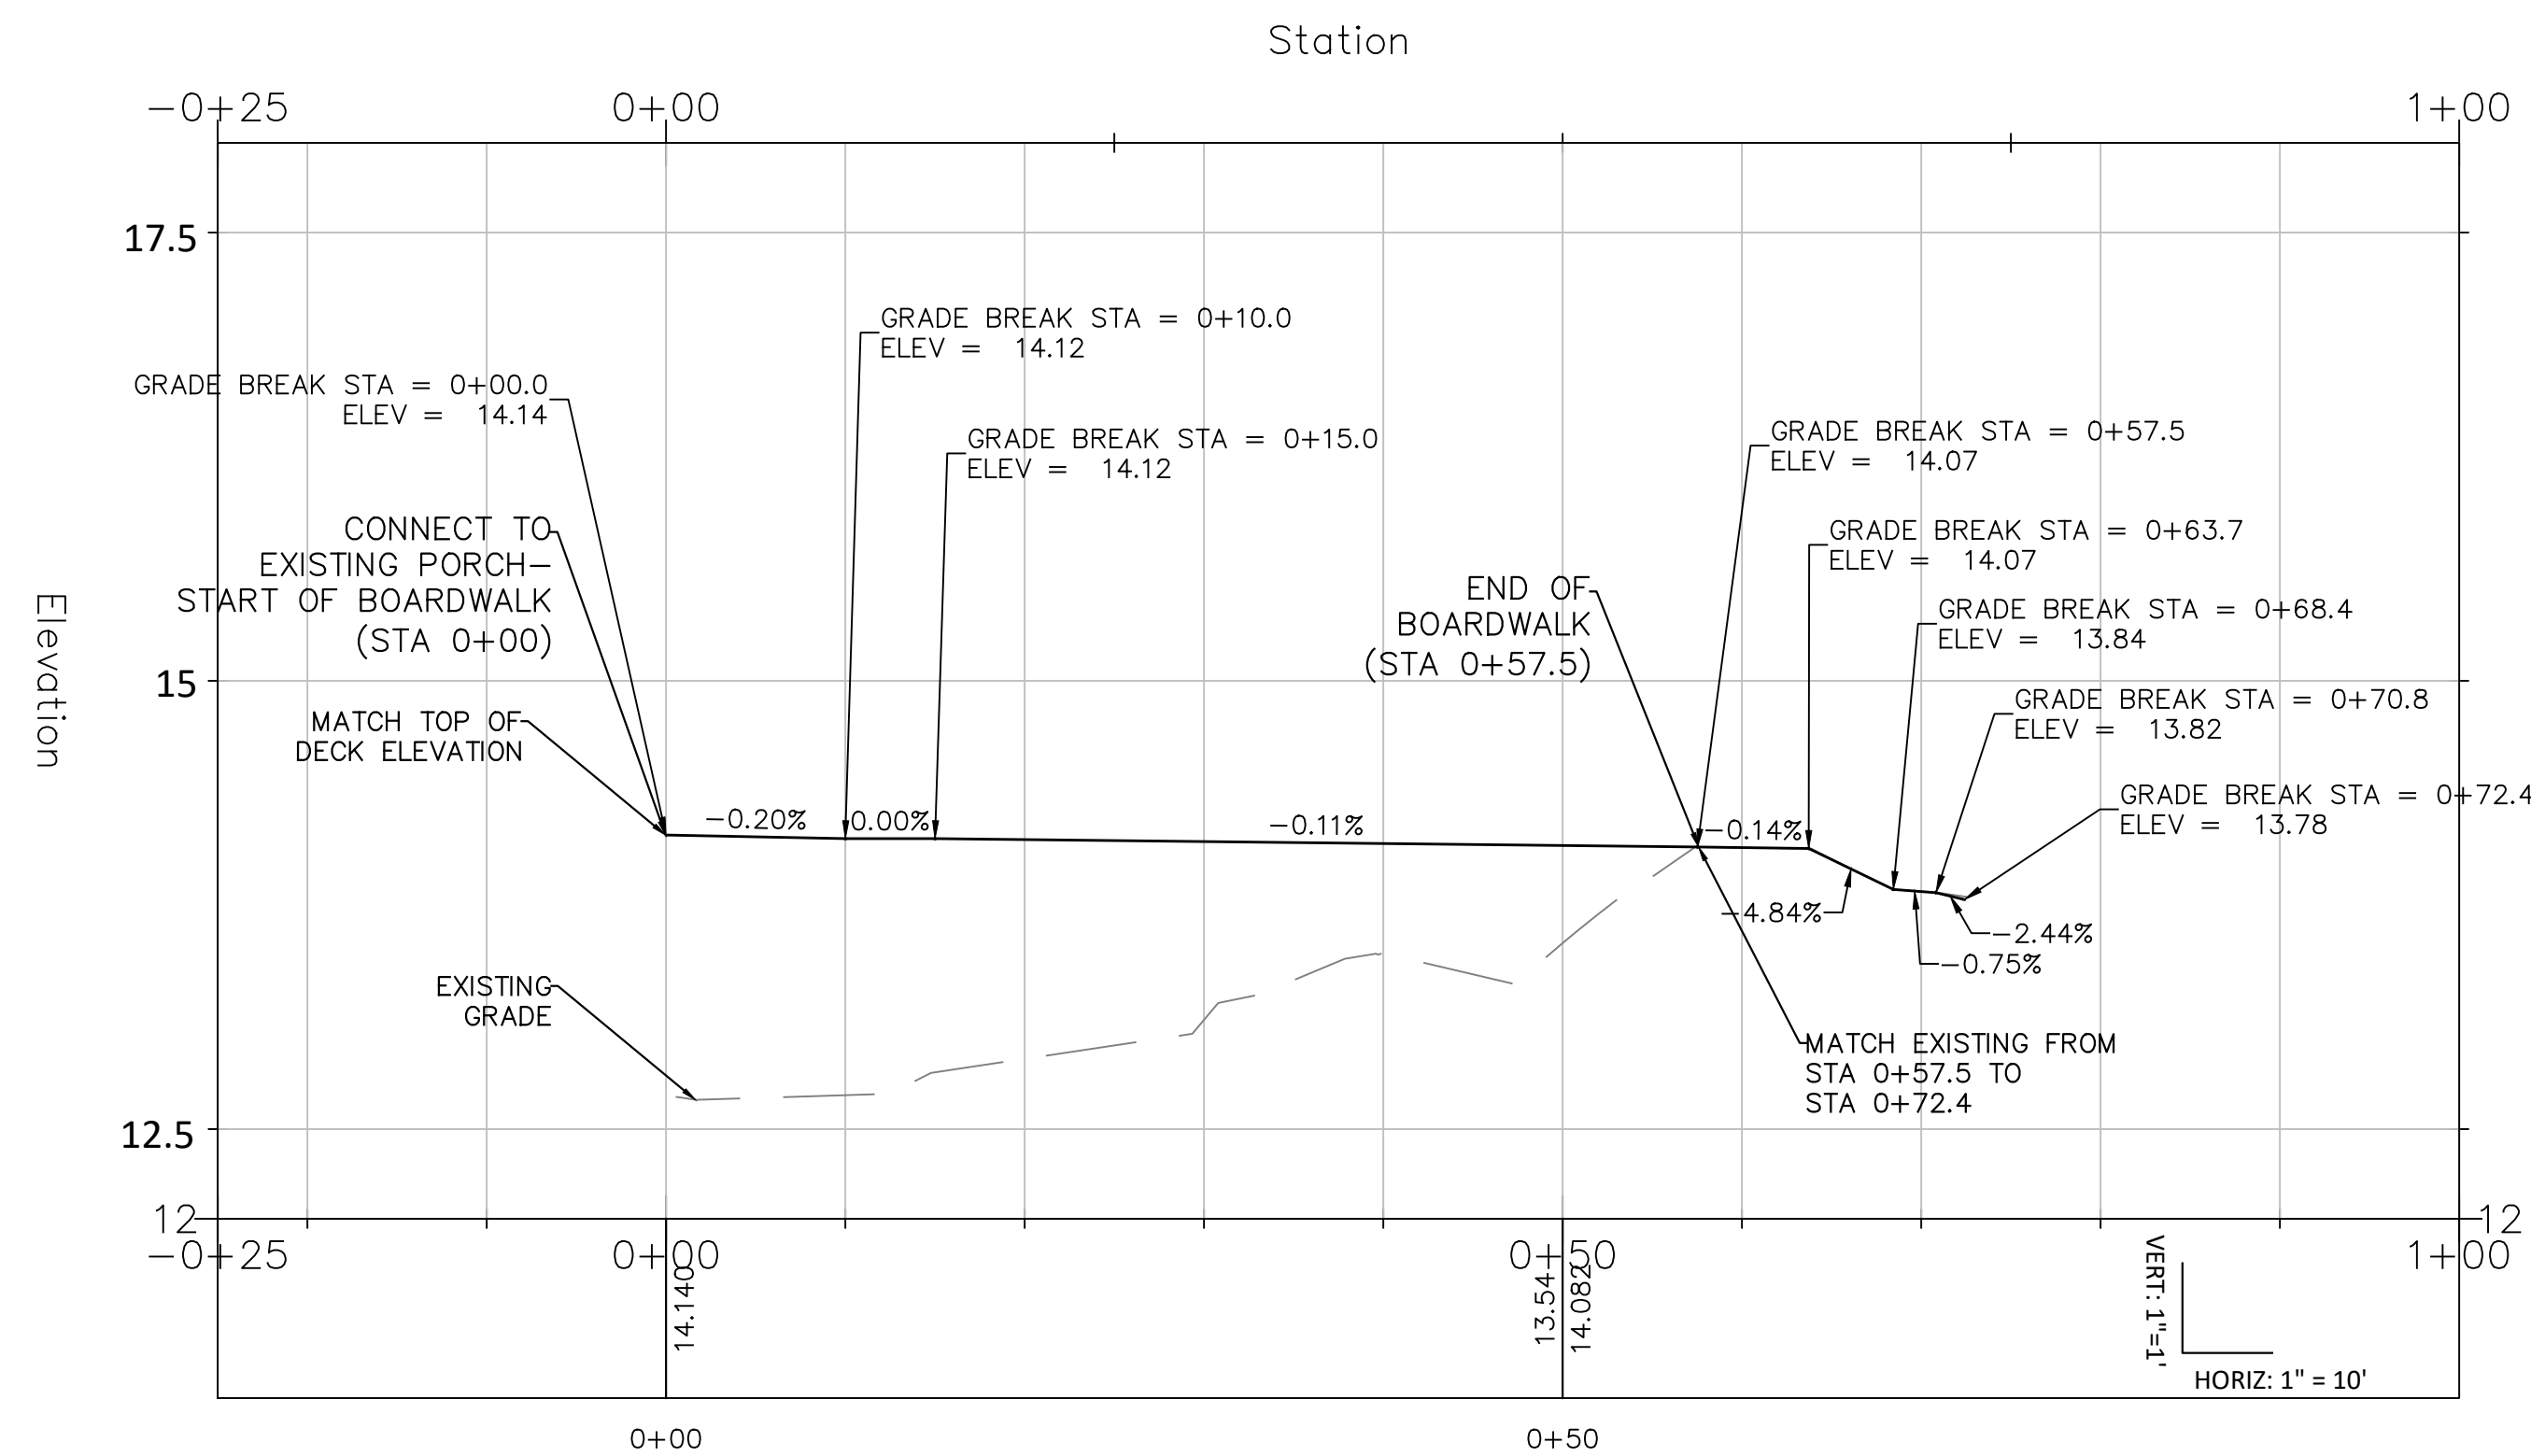

This document has been digitally signed and sealed by Leslie Weiss on the date adjacent to the seal. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

DESIGNER :	LAW	ISSUE DATE:	02/25/2025	SYMBOL	(A)	REVISION		DATE	
DRAWN BY:	AEB	COMP. FILE No.:		SYMBOL	(C)	REVISION		DATE	
REVIEWED BY:	LAW	STATE PROJECT No.:	61531C	SYMBOL	(B)	REVISION		DATE	
Consultant :	HYDRA ENGINEERING & CONSTRUCTION, LLC 36 Jasper Thomas Road Tallahassee, FL 32309 Phone (850) 926-2593 Fax (850) 926-9257 www.hydrac.com Florida CA#26124								
PROFESSIONAL REGISTRATION	LESLIE WEISS State of Florida P.E.# 56452								
SHEET TITLE	WINDLEY KEY FOSSIL STATE PARK								
PROJECT TITLE	PLAN & PROFILE - PORCH WALKWAY VISITOR CENTER & ADA IMPROVEMENTS								
SHEET NO.	C201								


Department of Environmental Protection
Division of Recreation and Parks
Bureau of Design and Construction
3800 Commonwealth Blvd., Tallahassee, FL 32399 (850) 245-2157

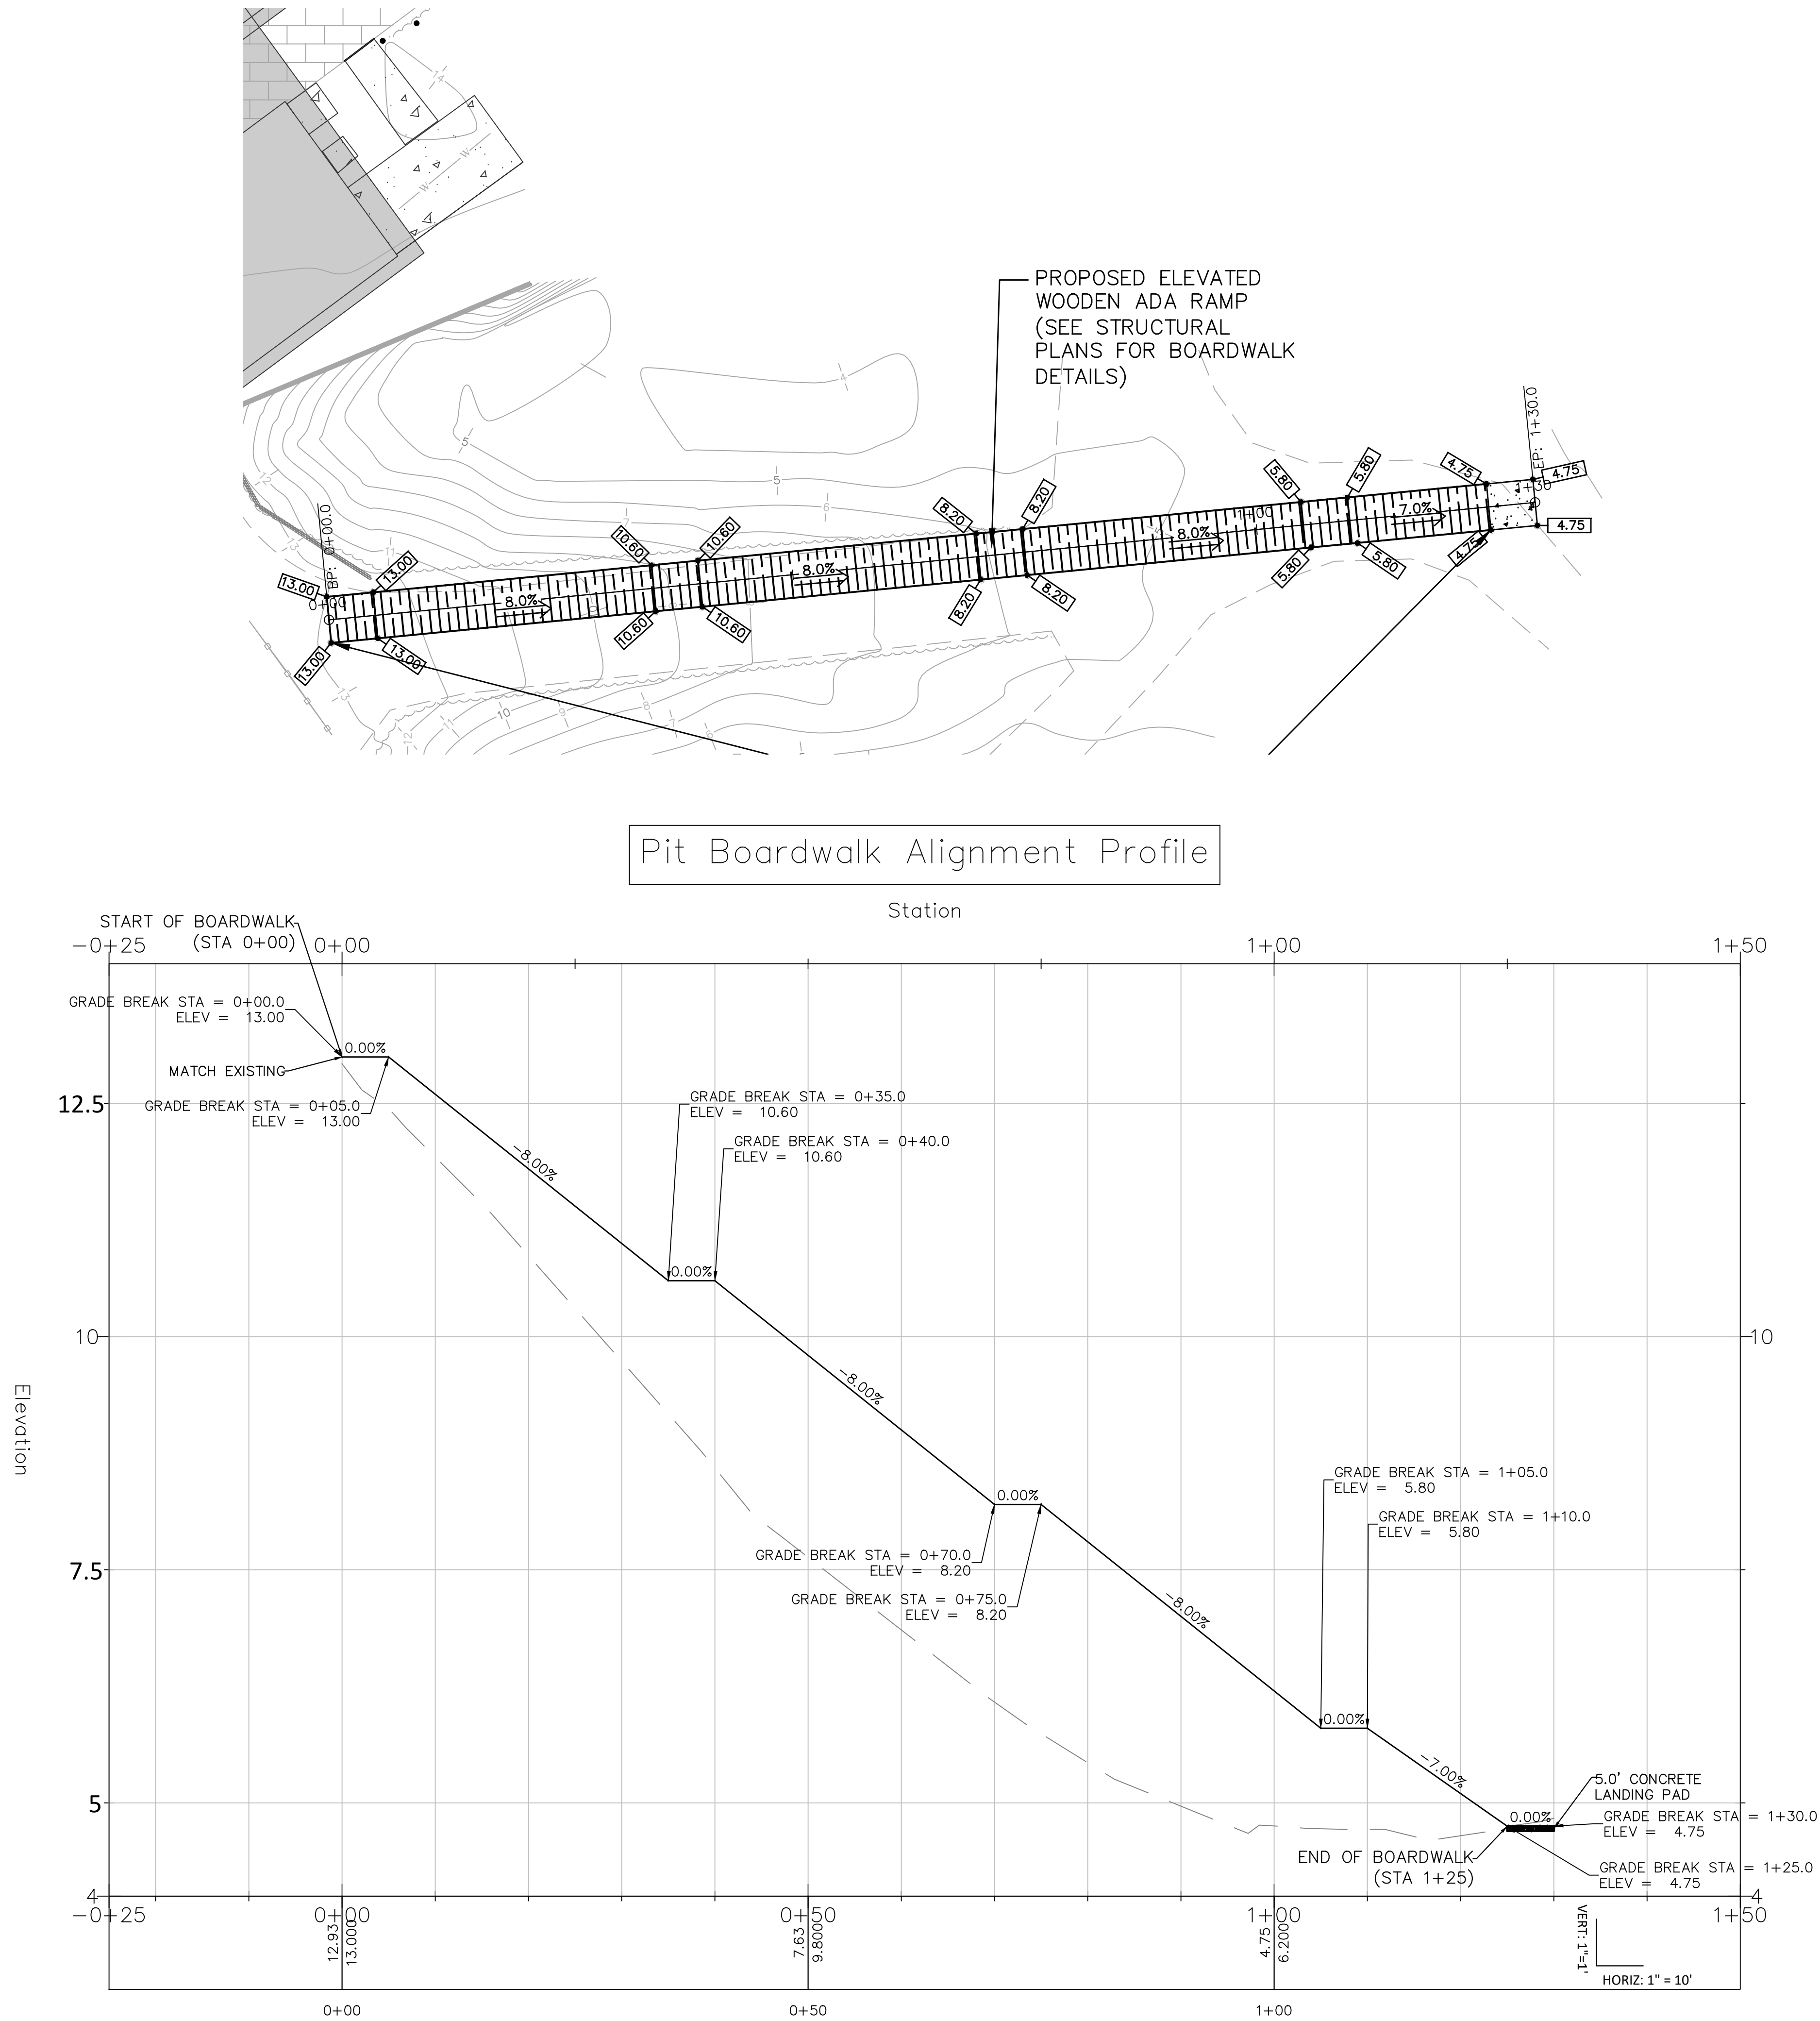

This document has been digitally signed and sealed by Leslie Weiss on the date adjacent to the seal. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

PROFESSIONAL REGISTRATION LESLIE WEISS State of Florida P.E.# 56452	DESIGNER : LAW DRAWN BY: AEB REVIEWED BY: LAW	ISSUE DATE: 02/25/2025 COMP. FILE No.: STATE PROJECT No.: 61531C	SYMBOL A B	REVISION	DATE	REVISION	DATE
WINDLEY KEY FOSSIL STATE PARK	PLAN & PROFILE - PIT BOARDWALK	SHEET NO.	C				
	VISITOR CENTER & ADA IMPROVEMENTS	PROJECT TITLE	D				
Department of Environmental Protection Division of Recreation and Parks Bureau of Design and Construction 3800 Commonwealth Blvd., Tallahassee, FL 32399 (850) 245-2157							

C202

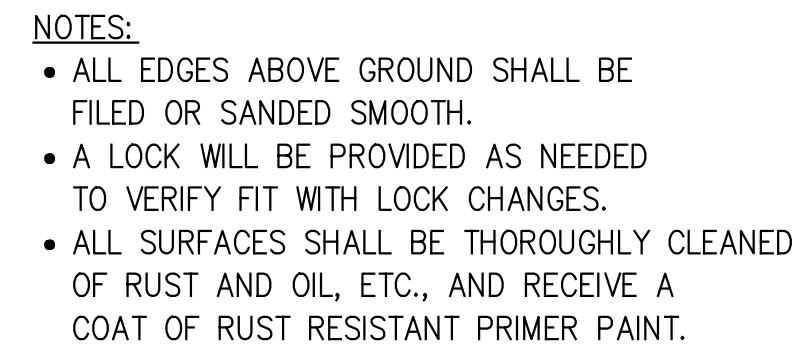

This document has been digitally signed and sealed by Leslie Weiss on the date adjacent to the seal. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies.

SHEET NO. C500	WINDLEY KEY FOSSIL STATE PARK SHEET TITLE	PROFESSIONAL REGISTRATION LESLIE A. WELLS State of Florida P.L.# 56452	DESIGNER : LAW DRAWN BY: AEB REVIEWED BY: LAW Consultant : HYDRA ENGINEERING & CONSTRUCTION, LLC 3900 South International Crawfordville, FL 32327 Phone (850) 926-2553 Fax (850) 926-9257 les@h-engineering.com Florida CA#28124	ISSUE DATE: 02/25/2025 COMP. FILE No.: STATE PROJECT No.: 61531C	SYMBOL (A) (B)	REVISION (C) (D)	DATE
	CONSTRUCTION DETAILS						
	VISITOR CENTER & ADA IMPROVEMENTS						
	PROJECT TITLE						
	Department of Environmental Protection Division of Recreation and Parks Bureau of Design and Construction 3800 Commonwealth Blvd., Tallahassee, FL 32399 (850) 245-2157						