

UTILITY PERMIT

PERMIT NO: 2023-H-191-00264

STATE ROAD INFORMATION

County: Okeechobee	Section: 91020000	State Road No: SR 15	Beginning Mile Post: 17.354	Ending Mile Post: 18.407
------------------------------	-----------------------------	--------------------------------	---------------------------------------	------------------------------------

APPLICANT INFORMATION

The Utility Agency Owner (UAO) shall be identified in this Applicant Information Box. When the UAO is a City or County and desires to have the Utility Builder make a joint permit applicant, as prescribed in Section 2.1(4) of the 2017 Utility Accommodation Manual (UAM), the Utility Builder shall also be identified in this Applicant Information Box. A Utility Builder alone cannot apply for a utility permit without the City or County adding them as a joint applicant.

<u>Utility Agency/Owner (UAO)</u>		<u>Utility Builder (only applicable when the UAO is a City or County)</u>	
Name:	<u>FLORIDA POWER & LIGHT-JUNO</u>	Name:	_____
Contact Person:	<u>FLORIDA POWER & LIGHT-JUNO</u>	Contact Person:	_____
Address:	<u>700 UNIVERSE BOULEVARD (TS4/JW)</u>	Address:	_____
City:	<u>JUNO BEACH</u>	City:	_____
State:	<u>Florida</u>	State:	_____
Zip:	<u>33408</u>	Zip:	_____
Telephone:	<u>5619043692</u>	Telephone:	_____
Email:	<u>rafael.e.vides@fpl.com</u>	Email:	_____

WORK DESCRIPTION

The Applicant(s) requests permission from the Florida Department of Transportation (FDOT) to construct, operate, and maintain the utilities as described below and as depicted in the incorporated documentation.

Install new Transmission Line facilities along SR-15 (US-441) between NE 224th St and NW 240th St and crossing over SR-15 (US-441) at NE 224th St in Okeechobee County, Florida. Sweatt-Whidden 230kv Transmission Line, FPL IO# 2H.T00000030424. NOTE: The proposed FPL Sweatt-Whidden 230kv transmission line was certified under the Florida Transmission Line Siting Act (TLSA, Florida Statutes 403.52-403.539) on September 22, 2022. One of the requirements of the TLSA certification ... (see work description cont. page)

Utility Work No: _____

Additional sheets are attached and are incorporated into this permit Yes ☒ No ☐

For FDEP certification, the FDOT agency report is attached in accordance with UAM Section 2.4.1 (13) Yes ☐ No ☒

TRAFFIC CONTROL (TCP)

☒ The TCP will comply with the following 600 series index(es) 601, 602, 603, 625

☐ A TCP has been attached and incorporated into this permit application in compliance with UAM Section 2.4.2.

MOT Technician's contact information (may be supplied at the two (2) business day notification to FDOT):

Name: Gil Sanford Telephone (941) 661-0998 ext. _____ Email: Gil.Sanford@fpl.com

COMMENCEMENT OF WORK

The UAO and/or Utility Builder shall commence actual construction in good faith within sixty (60) calendar days after approval of the permit application. If the beginning date is more than sixty (60) calendar days from the date of approval, the UAO and/or Utility Builder must review the permit with the FDOT Approving Engineer listed to make sure no changes have occurred to the transportation facility that would affect the permit's continued approval. The UAO and/or Utility Builder shall make good faith efforts to expedite the work and complete the work within the calendar days indicated.

Anticipated Start Date: 2/1/2024

Calendar days needed to completed: 365

Approved
2023-H-191-00264
Douglas Stewart
11/9/2023

UTILITY PERMIT

PERMIT NO: 2023-H-191-00264

APPLICANT SIGNATURE

By the below signature(s) the UAO and/or Utility Builder agree(s) to construct, operate, and maintain the work as noted in the above Work Description, shown in plans and incorporated documents, in compliance with the UAM, all instructions noted in the FDOT Special Instructions Box, and special instructions incorporated into this permit. The UAO and/or Utility Builder declares, the location of all existing utilities that it owns or has an interest in, both aerial and underground, are accurately shown on the plans of the work areas. In accordance with UAM Section 2.8, the UAO and/or Utility Builder further declares that a letter of notification was delivered to the owners of other facilities within the work areas and that those listed below are the only facility owners known to be involved or potentially impacted by the proposed work.

Date Notified: _____ Name of other facility owners (attach additional sheets if necessary). _____

Utility Agency/Owner

Utility Builder (when applicable)

Signature: RAFAEL VIDES (digital signature) Date: 11/9/2023

Name (printed): RAFAEL VIDES

Title: _____

Signature: _____ Date: _____

Name (printed): _____

Title: _____

FDOT PROJECT INFORMATION

Pursuant to UAM Section 2.1(10), the utility work is within FDOT projects listed below and must have a Utility Work Schedule for each project approved prior to commencement of work within the FDOT project limits:

There are NO FDOT constructions (proposed or underway).

This work is NOT related to an approved Utility work Schedule.

FDOT SPECIAL INSTRUCTIONS

In accordance with UAM Section 2.7, FDOT incorporates the below and attached special instructions into this permit.

1. ☐ Contact Douglas Stewart at (863) 471-4851, 48 hours before starting any work in the FDOT right of way.
2. ☐ Maintain appropriate maintenance of traffic at all times during this project.
3. ☐ All disturbed areas of the right of way are to be repaired and sodded as soon as possible.
4. ☐ Any damage to concrete, asphalt, structures, etc. is to be repaired as soon as possible.

Additional FDOT Special Instructions are attached and incorporated into this permit. Yes ☒ No ☐

PERMIT APPROVAL

By signature below, FDOT gives permission to the UAO and/or Utility Builder to construct, operate, and maintain the utilities indicated in this Utility Permit in compliance with the UAM, all incorporated documents, and special instructions. Any changes to the approved work must be approved by the FDOT's Approving Engineer and attached and incorporated into this permit in accordance with UAM Section 2.11.

Approving Engineer: Douglas Stewart (digital signature) Date: 11/9/2023

Name: Douglas Stewart

Title: PERMITS COORDINATOR I

Notification of Utility Work to be provided to: _____ Telephone (863) 471-4851 ext. _____ or Email: douglas.stewart@dot.state.fl.us

An FDOT Representative is required to be present on the worksite prior to commencement of work. Yes ☐ No ☒

Rep. Name: _____ Telephone _____ Email: _____

Approved
2023-H-191-00264
Douglas Stewart
11/9/2023

Florida Department of Transportation
UTILITY PERMIT

December 14, 2016

PERMIT NO: 2023-H-191-00264

CERTIFICATION

I, the undersigned UAO and/or Utility Builder, hereby CERTIFY that the utilities were constructed and inspected in compliance with the UAM all incorporated documents, and special instructions. Pursuant to UAM Section 2.11, all changes have been approved by the FDOT's Approving Engineer and incorporated into this permit along with all other material certifications, test results, bore logs, approved plans changes, as-built plans or other required documentation.

I also CERTIFY that work began on _____ and was completed on _____ and that the area was left in as good or better condition than when the work began.

Utility Agency/Owner

Utility Builder (when applicable)

Signature: _____ Date _____

Signature: _____ Date _____

Name (printed): _____

Name (printed): _____

Title: _____

Title: _____

FINAL INSPECTION OF WORK

☐ The work was inspected and found to be in non-compliance as noted below:

☐ All issues of non-compliance listed above have been brought into compliance and/or FDOT has no outstanding issues that need to be addressed by the UAO and/or Utility Builder. However, this final inspection does not release the UAO and/or Utility Builder of their continuing responsibilities pursuant to Rule 14-46.001, the UAM, all incorporated documents, and special instructions.

FDOT Inspector: _____ Date: _____

Name: _____

Title: _____

Approved
2023-H-191-00264
Douglas Stewart
11/9/2023

PERMIT NO.: 2023-H-191-00264

The complete Work Description could not fit in the space allotted on Page 1 of the Utility Permit so it is displayed below.

Work Description

Install new Transmission Line facilities along SR-15 (US-441) between NE 224th St and NW 240th St and crossing over SR-15 (US-441) at NE 224th St in Okeechobee County, Florida. Sweatt-Whidden 230kV Transmission Line, FPL IO# 2H.T00000030424.

NOTE: The proposed FPL Sweatt-Whidden 230kV transmission line was certified under the Florida Transmission Line Siting Act (TLSA, Florida Statutes 403.52-403.539) on September 22, 2022. One of the requirements of the TLSA certification process requires when FPL makes post certification (permit) submittals to affected agencies and local governments it makes simultaneous submittals to the Florida DEP Siting Coordination Office in Tallahassee. The cover letter to FDEP and the distribution list of the other parties to the certification are included here for your information.

Approved
2023-H-191-00264
Douglas Stewart
11/9/2023



The complete special instructions could not fit in the space allotted on Page 2 of the Utility Permit so they are displayed below.

Special FDOT Instructions

- 1.Contact Douglas Stewart at (863) 471-4851, 48 hours before starting any work in the FDOT right of way.
- 2.Maintain appropriate maintenance of traffic at all times during this project.
- 3.All disturbed areas of the right of way are to be repaired and sodded as soon as possible.
- 4.Any damage to concrete, asphalt, structures, etc. is to be repaired as soon as possible.
- 5.All debris and material are to be removed from the right of way. Remove excess material from around new pole installation to eliminate erosion and silt in DOT right of way.
- 6.All debris and material are to be removed from the right of way.
- 7.8-6.4 Suspension of Contractor's Operations - Holidays: Unless the Contractor submits a written request to work on a holiday at least ten days in advance of the requested date and receives written approval from the Engineer, the Contractor shall not work on the following days: Martin Luther King, Jr. Day; Memorial Day; the Saturday and Sunday immediately preceding Memorial Day; Independence Day; Labor Day; the Friday, Saturday, and Sunday immediately preceding Labor Day; Veterans Day; the Wednesday immediately preceding Thanksgiving Day; Thanksgiving Day; the Friday, Saturday and Sunday immediately following Thanksgiving Day; and December 24 through January 2, inclusive.
- 8.Anyone working on state right of way must complete TIER 1 ILLICIT DISCHARGE DETECTION AND ELIMINATION TRAINING and provide the FDOT office with a certificate of completion. <http://wbt.dot.state.fl.us/ois/IllicitDischarge/index.htm>
- 9.Fill out final inspection certification on page 3 of utility permit and return to Douglas Stewart to close out the permit.

Approved
2023-H-191-00264
Douglas Stewart
11/9/2023

SR-70 PROJECT
PROPOSED SWEATT - WHIDDEN 230KV LINE
SWEATT - BASINGER SECTION US 441
FDOT PARALLELISM EXHIBIT

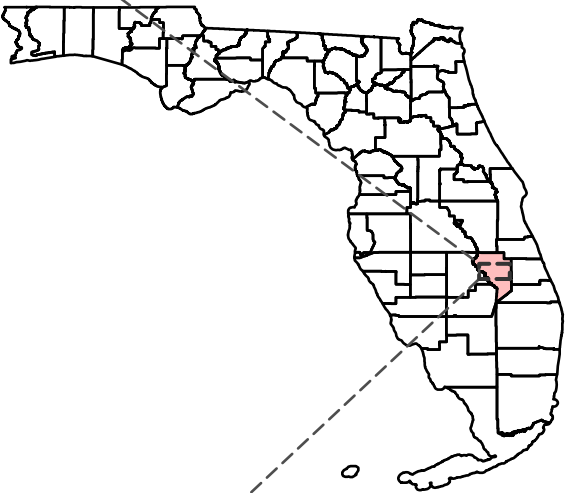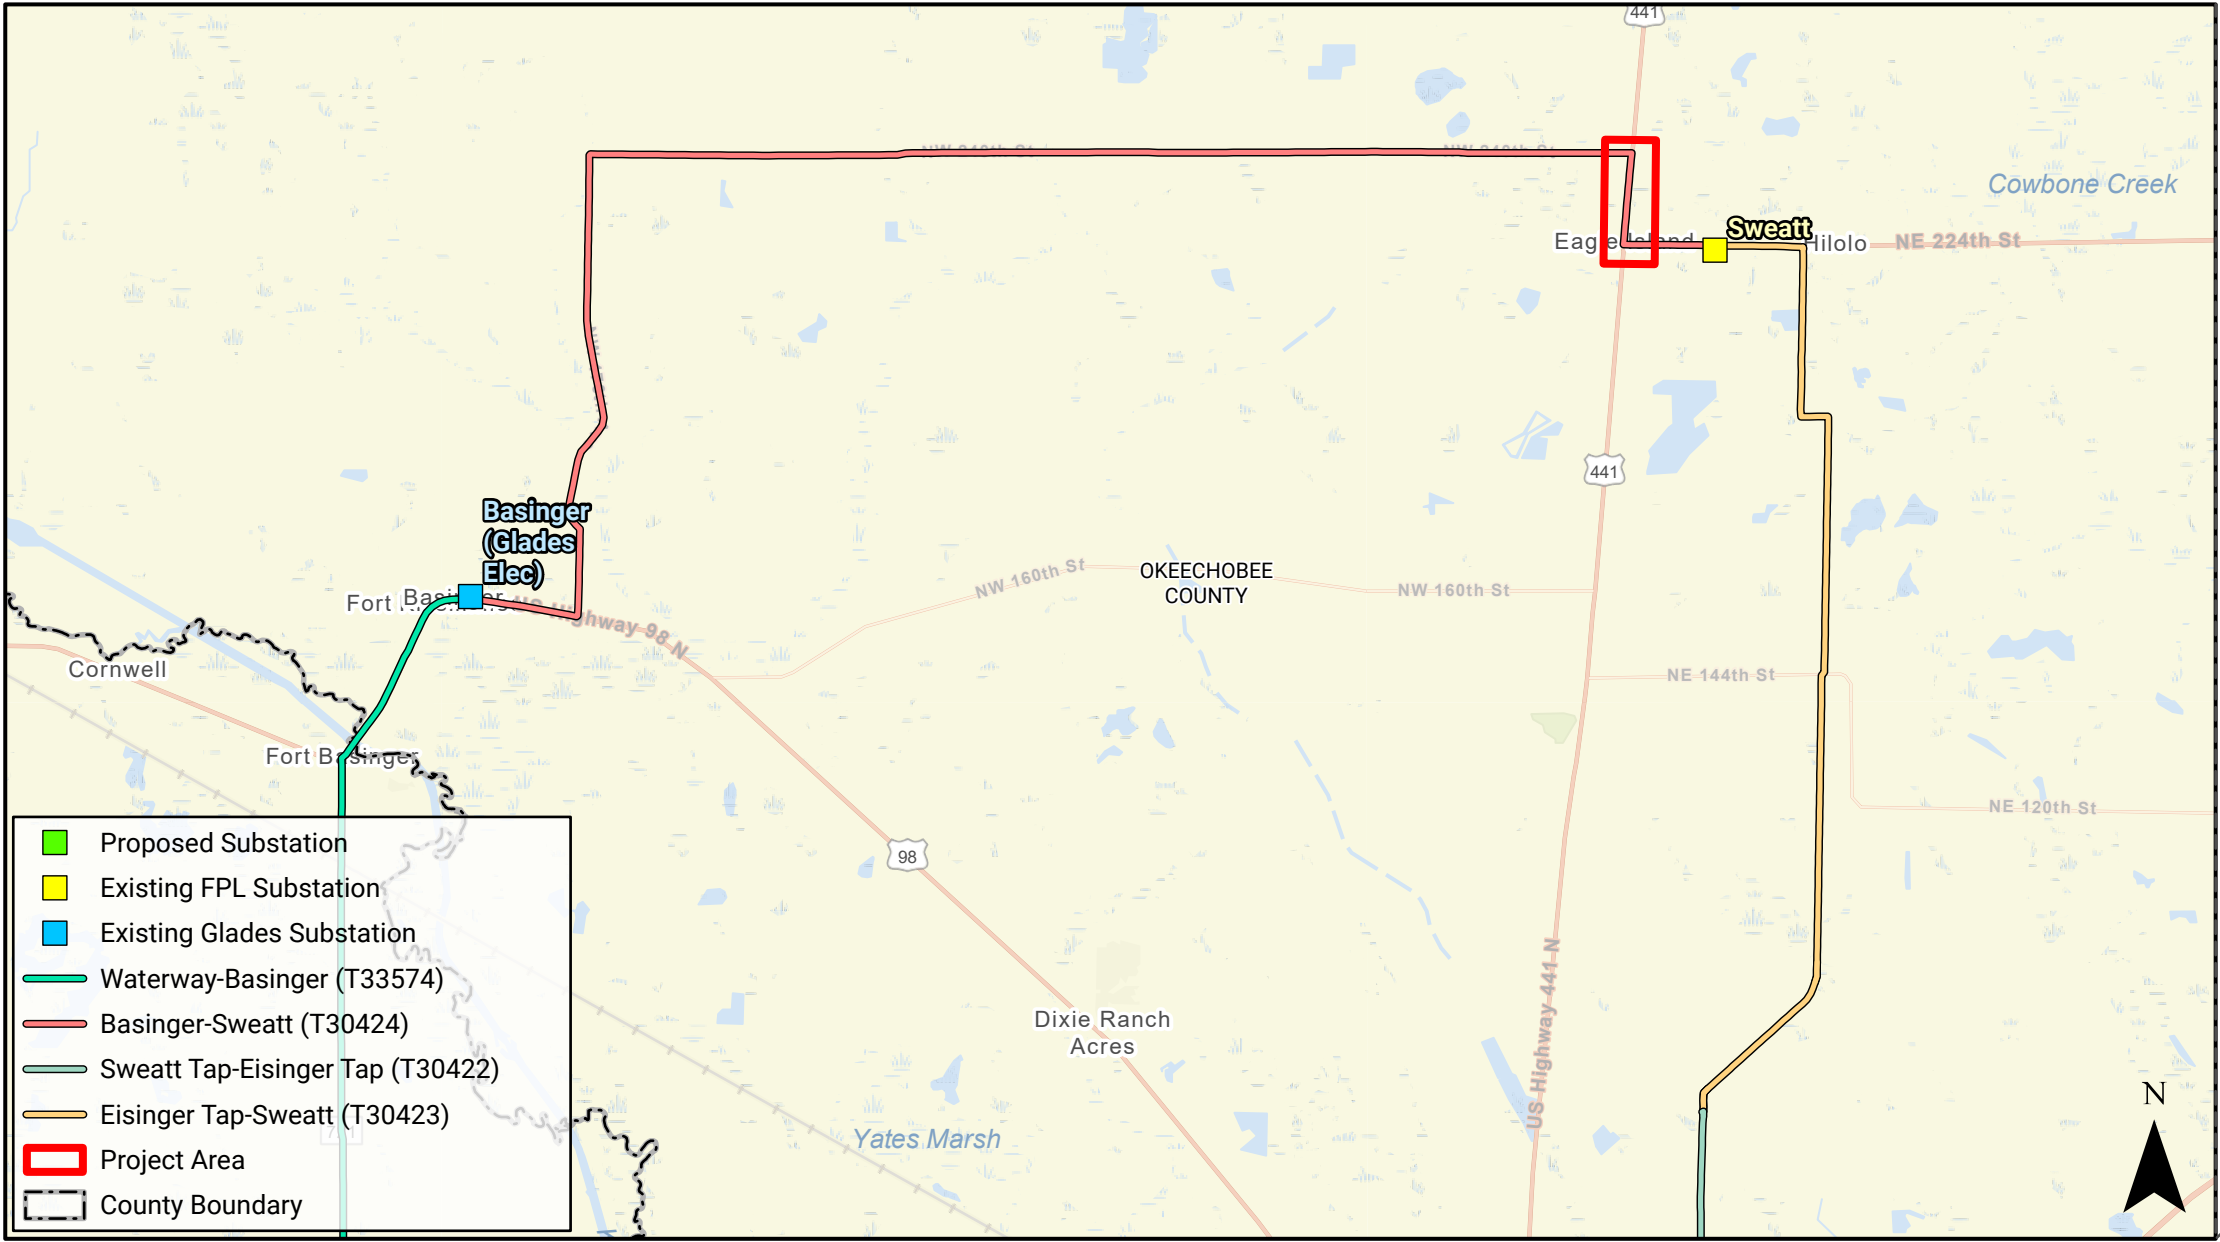

PROJECT LOCATION
OKEECHOBEE COUNTY

Proposed Substation

Existing FPL Substation

Existing Glades Substation

Waterway-Basinger (T33574)

Basinger-Sweatt (T30424)

Sweatt Tap-Eisinger Tap (T30422)

Eisinger Tap-Sweatt (T30423)

Project Area

County Boundary

Permit to use FDOT Road R/W for installation of matting for construction of new 230kV Transmission Line. The Transmission Structures will be installed in FPL Easement on private property. MOT will be performed by the contractor in order to safely enter and exit the right of way at each work location. Note that only a few poles will be able to be worked each day.

Okeechobee County Roads NE 224th, NE 240th, and NW 176th will be permitted under separate cover.

- NOTES:
- 1. COMPLIANCE WITH 2017 UAM, 2018 FLORIDA GREENBOOK & 2023-24 FDOT SPECIFICATIONS.
 - 2. CONSTRUCTION AREA TO BE RESTORED TO EXISTING CONDITIONS AFTER CONSTRUCTION PERFORMED.
 - 3. SOFT DIGS ARE SCHEDULED AS REQUIRED. LOCATE IDENTIFIED UNDERGROUND FACILITIES PRIOR TO CONSTRUCTION.
 - 4. SEE ATTACHED STANDARD FDOT MOT INDEXES 102-601, 102-602, 102-603, 102-625.
 - 5. ALL POLE LOCATIONS WILL COMPLY WITH ADA REQUIREMENTS FOR WHEELCHAIR ACCESS.

A	11/3/2023	ISSUED FOR SUBMITTAL	CAC	BJW	BJW
REV	DATE	DESCRIPTION	BY	CKD	APP

FLORIDA POWER & LIGHT COMPANY

SCALE: NTS
DRAWN BY: CAC
ENGINEER: BJW
COUNTY: OKEECHOBEE
SHEET 1 OF 7

DATE: 11/3/2023
CHECKED BY: BJW
SECTION: AS SHOWN

2H.T00000030424
SWEATT-WHIDDEN 230KV LINE
US 441 FDOT PARALLELISM EXHIBIT
COVER SHEET



Existing FPL Substation

Existing Glades Substation

Project Centerline

Map Sheet Boundary

A

10/24/2023

ISSUED FOR SUBMITTAL

REV

DATE

DESCRIPTION

CAC

BJW

BJW

BY

CKD

APP

FLORIDA POWER & LIGHT COMPANY

2H.T00000030424

SCALE: NTS
DRAWN BY: CAC
ENGINEER: BJW
COUNTY: OKEECHOBEE
SHEET: 2 OF 7

DATE: 10/24/2023
CHECKED BY: BJW
SECTION: AS SHOWN





SWEATT-WHIDDEN 230KV LINE
US 441 FDOT PARALLELISM EXHIBIT
INDEX MAP

This product is for informational purposes only and may not have been prepared for legal, engineering, or surveying purposes. It does not represent an on-the-ground survey and represents only the approximate relative location of displayed information.



	US HWY 441		A	10/24/2023	ISSUED FOR SUBMITTAL			CAC	BJW	BJW
			REV	DATE	DESCRIPTION			BY	CKD	APP
	FLORIDA POWER & LIGHT COMPANY 2H.T00000030424									
	SCALE: NTS DRAWN BY: CAC ENGINEER: BJW COUNTY: OKEECHOBEE SHEET: 3 OF 7				DATE: 10/24/2023 CHECKED BY: BJW SECTION: AS SHOWN				SWEATT - WHIDDEN 230KV LINE FDOT PARALLELISM EXHIBIT PROPOSED PHOTO SIMULATION	

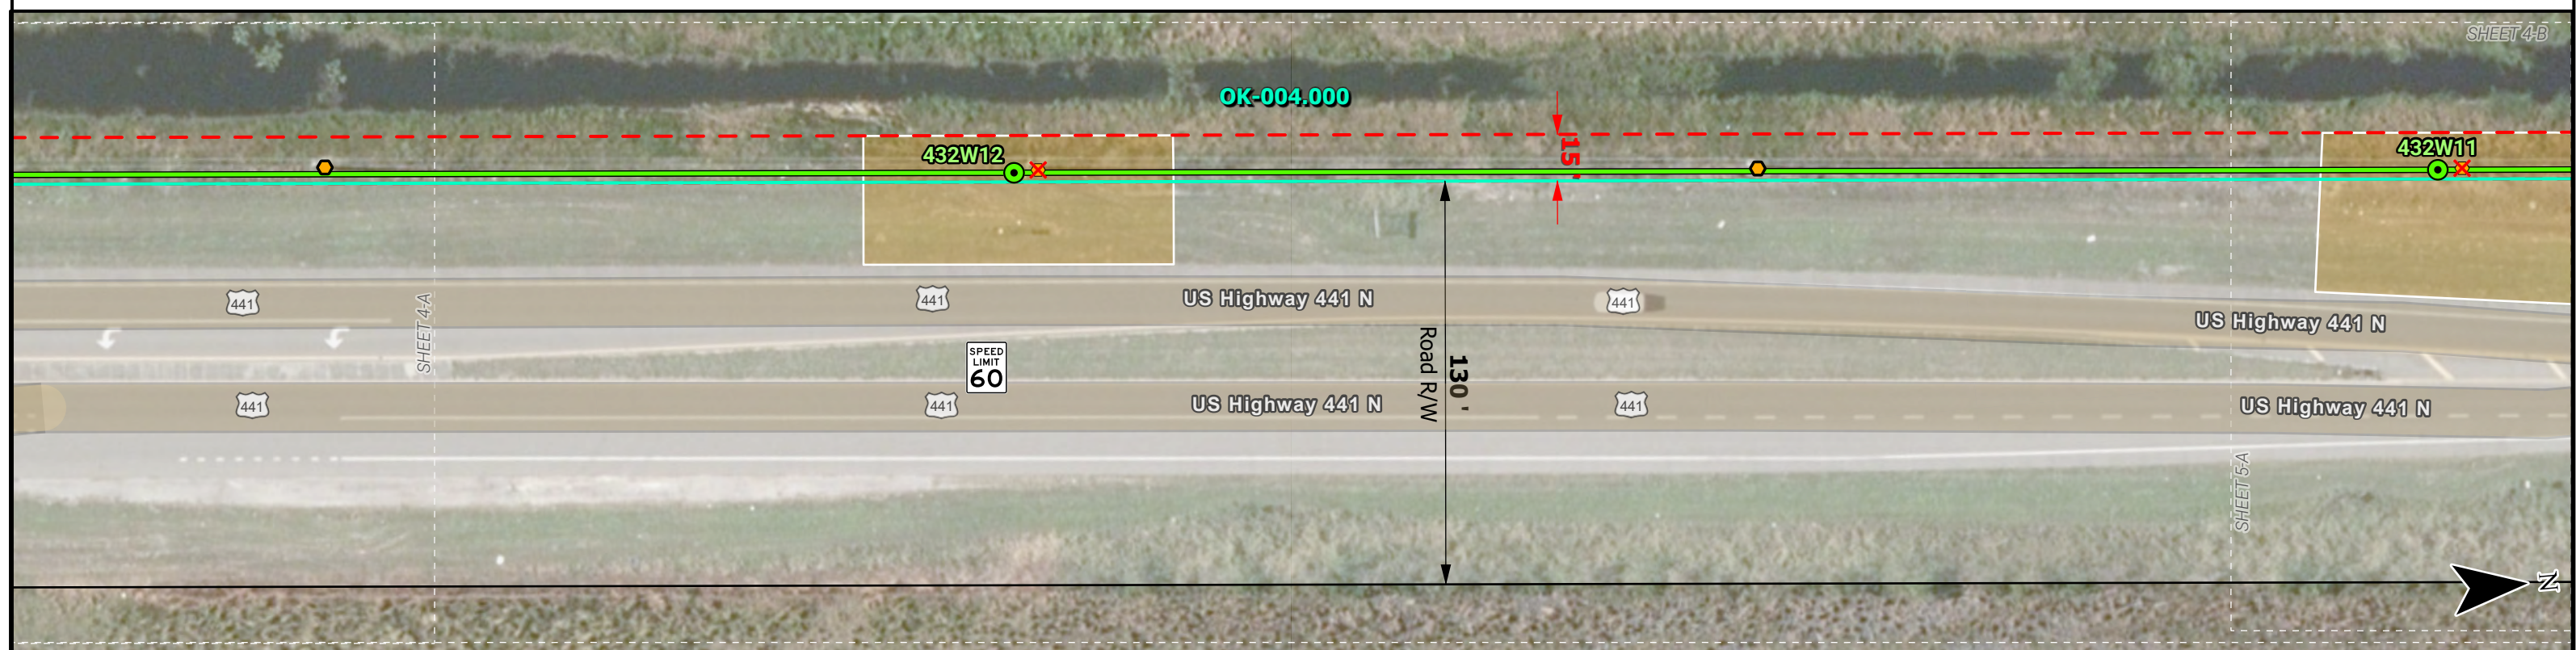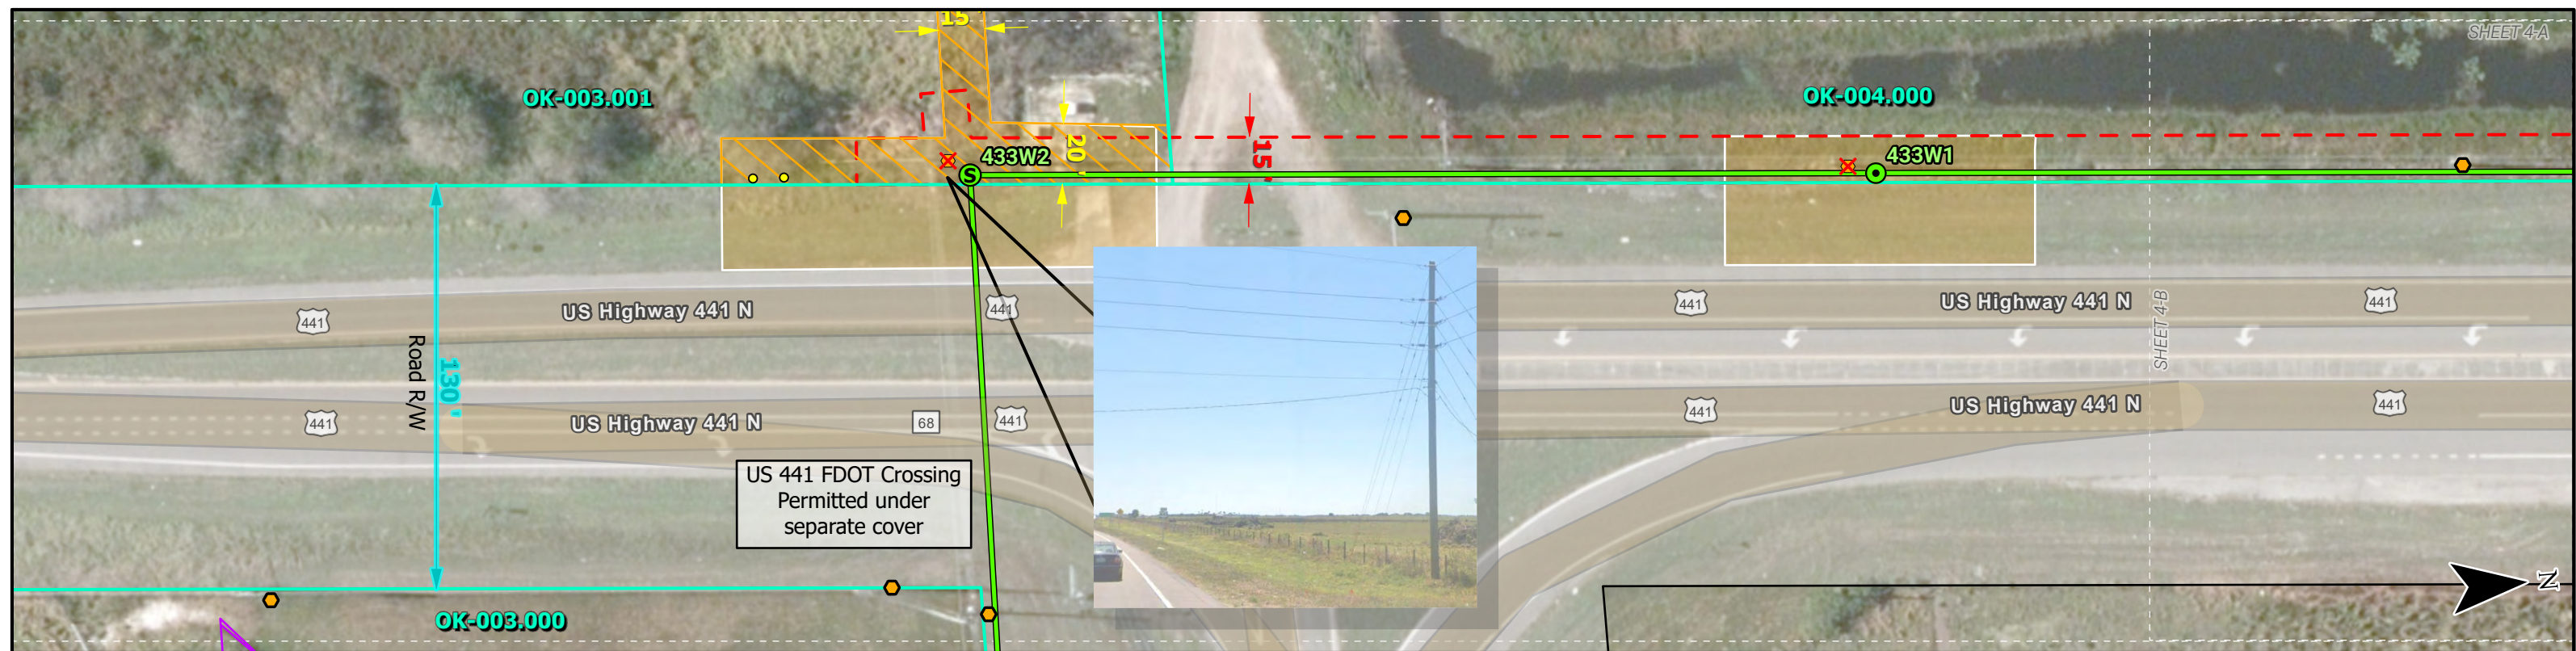

 Proposed Concrete Structure

 Proposed Concrete Splice Structure

 Proposed Steel Structure

 Proposed Steel Splice Structure

 GEC Structure to Remove

 Sweatt-Waterway Proposed Anchor Pile

 Existing Distribution Pole

 GEC Proposed Distribution Pole

 GEC Existing Distribution Pole

 GEC Distribution Pole to Remove

 FPL Distribution Pole to Remove

 Proposed Centerline

 Existing Transmission Line to be Removed

 Proposed FPL Easement

 Permanent Access Easement

 FPL Electric Easement

 Glades Electric Easement

 Seminole Electric Easement

 SFWMD Conservation Easement

 Surface Water

 Wetland

 Upland Matting

 Wetland Matting

 Upland Tree Clearing

 Wetland Tree Clearing

 Road ROW

 Project Parcel



A	10/24/2023	ISSUED FOR SUBMITTAL	CAC	BJW	BJW
REV	DATE	DESCRIPTION	BY	CKD	APP

FLORIDA POWER & LIGHT COMPANY
 2H.T00000030424

SCALE: 1" = 50'

DRAWN BY: CAC

ENGINEER: BJW

COUNTY: OKEECHOBEE

SHEET 4 OF 7

DATE: 10/24/2023

CHECKED BY: BJW


SECTION: AS SHOWN



SWEATT-WHIDDEN 230kV LINE

US 441 PARALLELISM EXHIBIT

LOCATION MAP

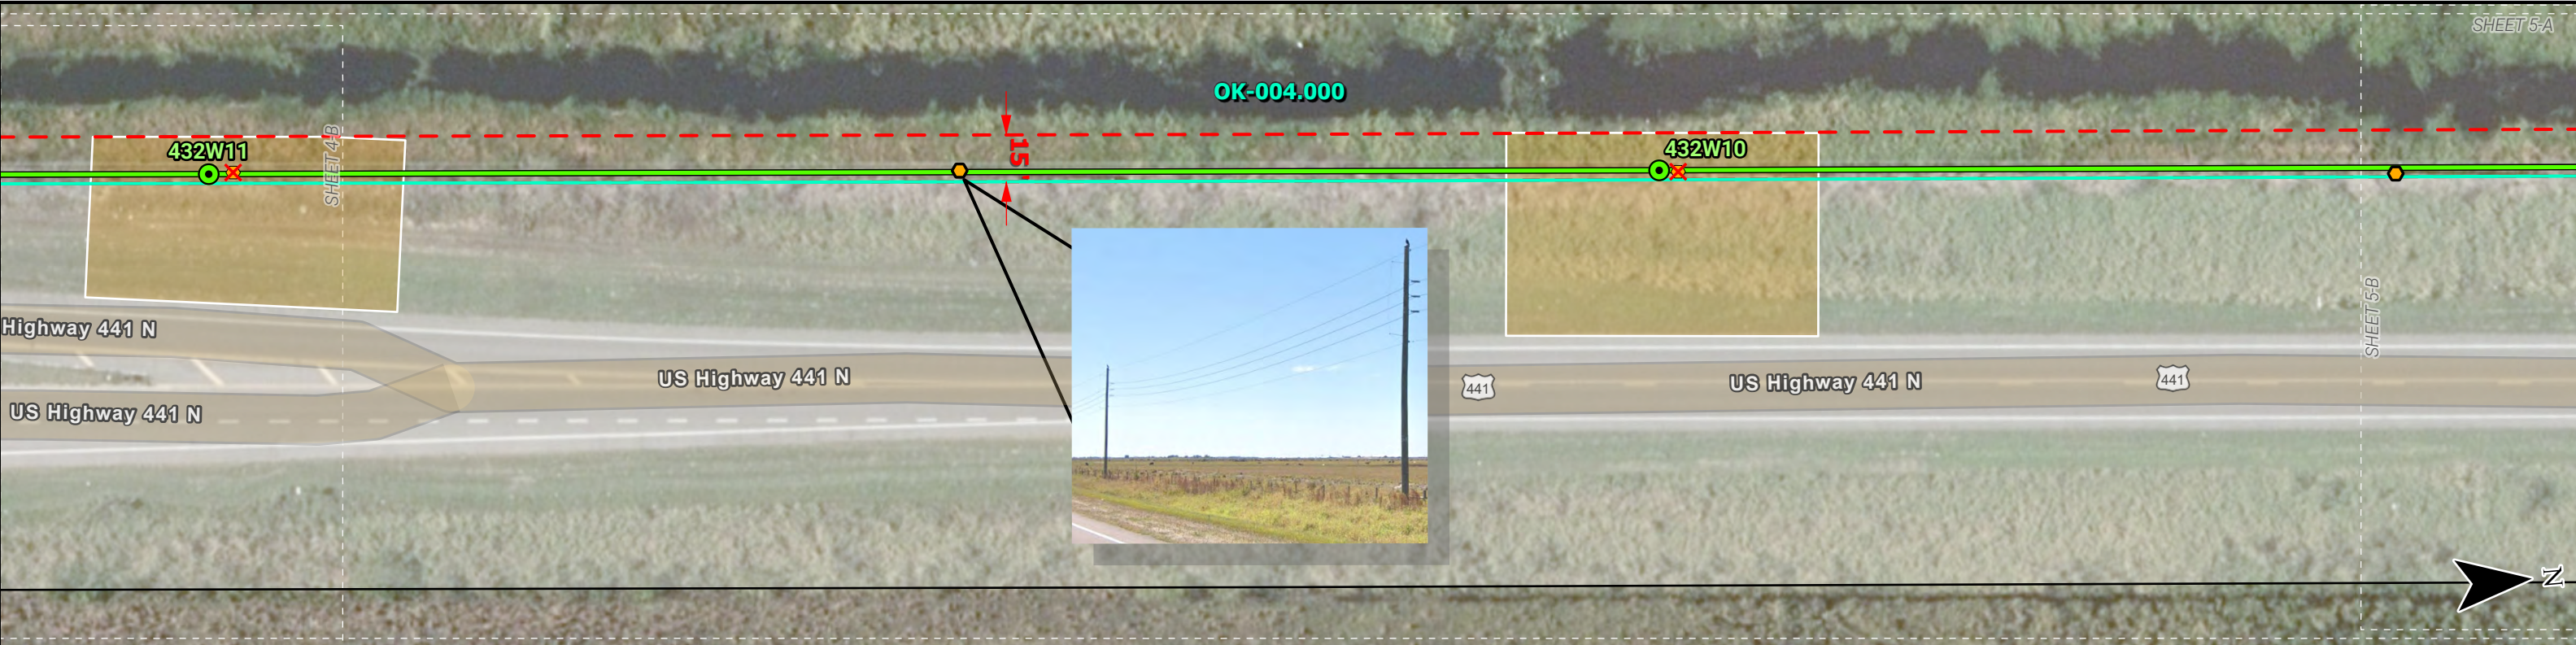

- | | | | | |
|------------------------------------|--------------------------------------|--|-----------------------------|-----------------------|
| Proposed Concrete Structure | Sweatt-Waterway Proposed Anchor Pole | FPL Distribution Pole to Remove | FPL Electric Easement | Upland Matting |
| Proposed Concrete Splice Structure | Existing Distribution Pole | Proposed Centerline | Glades Electric Easement | Wetland Matting |
| Proposed Steel Structure | GEC Proposed Distribution Pole | Existing Transmission Line to be Removed | Seminole Electric Easement | Upland Tree Clearing |
| Proposed Steel Splice Structure | GEC Existing Distribution Pole | Proposed FPL Easement | SFWMD Conservation Easement | Wetland Tree Clearing |
| GEC Structure to Remove | GEC Distribution Pole to Remove | Permanent Access Easement | Surface Water | Road ROW |
| | | | Wetland | Project Parcel |

0	50	100	A	10/24/2023	ISSUED FOR SUBMITTAL	CAC	BJW	BJW
Feet			REV	DATE		BY	CKD	APP

FLORIDA POWER & LIGHT COMPANY

2H.T00000030424

SCALE: 1" = 50'
DRAWN BY: CAC
ENGINEER: BJW
COUNTY: OKEECHOBEE
SHEET 5 OF 7


DATE: 10/24/2023
CHECKED BY: BJW
SECTION: AS SHOWN

SWEATT-WHIDDEN 230kV LINE
US 441 PARALLELISM EXHIBIT
LOCATION MAP

This product is for informational purposes only and may not have been prepared for legal, engineering, or surveying purposes. It does not represent an on-the-ground survey and represents only the approximate relative location of displayed information.



T30424 PROPOSED SWEATT-WHIDDEN 230kV LINE (SR 70 PROJECT)
FDOT ROAD CROSSING PERMIT
US HIGHWAY 441 (SR.-15)
OKEECHOBEE COUNTY, FLORIDA

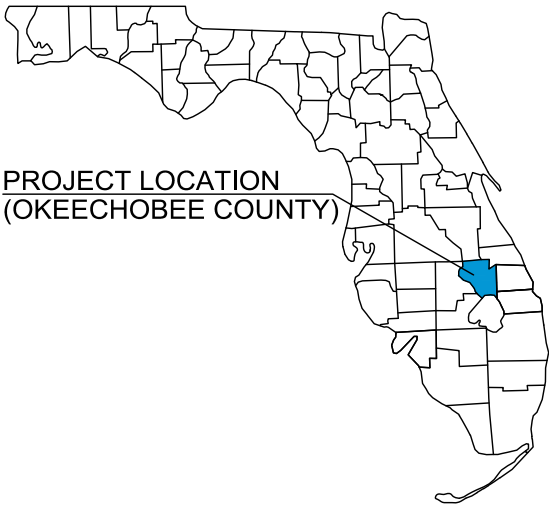


PICKETT AND ASSOCIATES, LLC
5010 WEST NASSAU STREET
TAMPA, FLORIDA 33607
C.A. NUMBER 31323
(813) 877-7770

NOTES:

1. COMPLIANCE WITH 2017 UAM, 2018 FLORIDA GREENBOOK & 2023-24 FDOT SPECIFICATIONS.
2. CONSTRUCTION AREA TO BE RESTORED TO EXISTING CONDITIONS AFTER CONSTRUCTION PERFORMED.
3. SOFT DIGS ARE SCHEDULED AS REQUIRED. LOCATE IDENTIFIED UNDERGROUND FACILITIES PRIOR TO CONSTRUCTION.
4. SEE ATTACHED STANDARD FDOT MOT INDEXES 102-601, 102-602, 102-603 & 102-625.
5. ALL POLE LOCATIONS WILL COMPLY WITH ADA REQUIREMENTS FOR WHEELCHAIR ACCESS.

0	09/27/2023	ISSUED FOR PERMIT	MDF	EW	BJW
REV	DATE	DESCRIPTION	BY	CKD	APP

TRANSMISSION ENGINEERING DEPARTMENT		2H.T00000030424	
SCALE: 1"=2,000' DRAWN BY: MDF ENGINEER: BJW COUNTY: OKEECHOBEE SHEET 1 OF 3		DATE: 3/31/2023 CHECKED BY: EW SECTION: 32-37S-36E, 24-37S-35E, 13-37S-35E FILE NAME: FDOT Crossing Permit For HWY 441.dwg	
		SWEATT-WHIDDEN 230kV LINE SR-15 (US HWY 441) FDOT ROAD CROSSING PERMIT 11/9/2023	

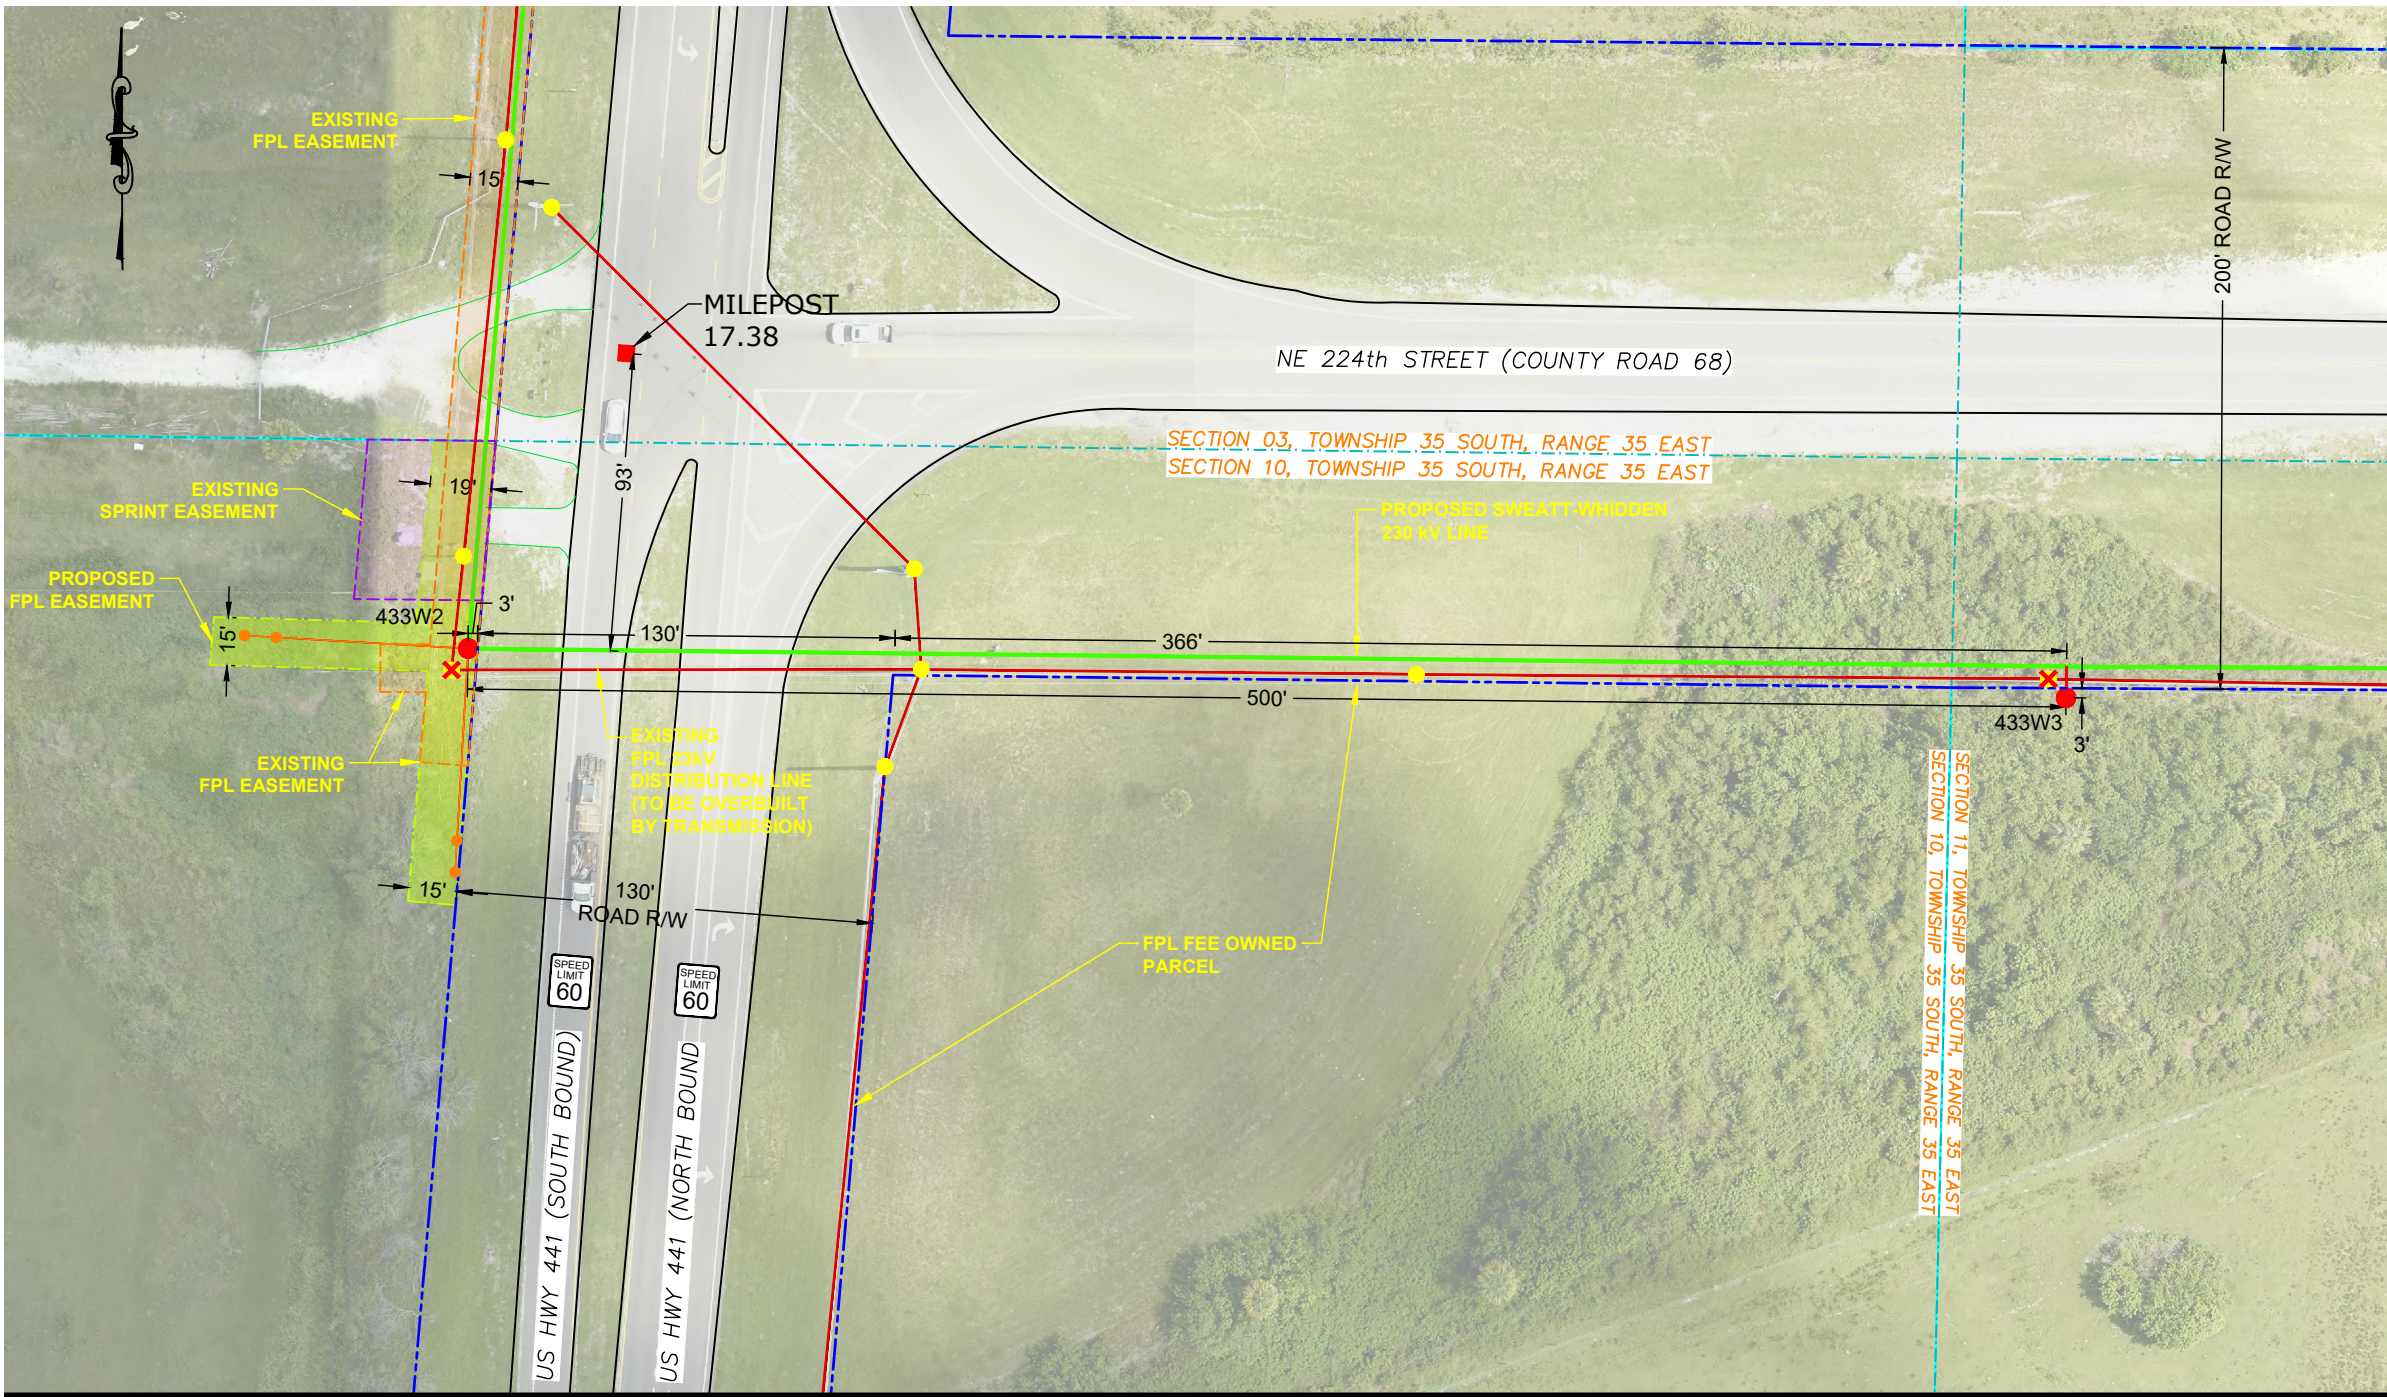

NOTES:

1. COMPLIANCE WITH 2017 UAM, 2018 FLORIDA GREENBOOK & 2023-24 FDOT SPECIFICATIONS.
2. CONSTRUCTION AREA TO BE RESTORED TO EXISTING CONDITIONS AFTER CONSTRUCTION PERFORMED.
3. SOFT DIGS ARE SCHEDULED AS REQUIRED. LOCATE IDENTIFIED UNDERGROUND FACILITIES PRIOR TO CONSTRUCTION.
4. SEE ATTACHED STANDARD FDOT MOT INDEXES 102-601, 102-602, 102-603 & 102-625.
5. ALL POLE LOCATIONS WILL COMPLY WITH ADA REQUIREMENTS FOR WHEELCHAIR ACCESS.

FDOT DISTRICT 1

LEGEND	
●	PROPOSED TRANSMISSION SPUN CONC. POLE
—	PROPOSED TRANSMISSION LINE
●	EXISTING DISTRIBUTION POLE (TO REMAIN)
✕	EXISTING DISTRIBUTION POLE (TO REMOVE)
—	EXISTING DISTRIBUTION LINE
●	PROPOSED ANCHOR PILE
—	PROPOSED GUY WIRE
—	RIGHT OF WAY LINE
—	PROPERTY LINE
—	EDGE OF PAVEMENT
—	FPL EXISTING EASEMENT
—	FPL PROPOSED EASEMENT
—	SPRINT EXISTING EASEMENT
—	SECTION, TOWNSHIP, RANGE

SR-15 (US HWY 441) CROSSING
PROPOSED SWEATT-WHIDDEN 230KV TRANSMISSION LINE
SEGMENT: SWEATT-BASINGER
PLAN VIEW

SR-15 (US HWY 441)		
SECTION: 10	TOWNSHIP: 35S	RANGE: 35E
SECTION: 11	TOWNSHIP: 35S	RANGE: 35E
AN APPLICATION TO INSTALL, OPERATE AND MAINTAIN 1-230KV TRANSMISSION LINE ALONG AND/OR ACROSS THE PROPERTY INDICATED ABOVE.		
REFERENCE DATA		CROSSING DATA
CROSSING OVER SR-15 (US 441)		APPROX. 130 FEET LOCATED WITHIN ROAD R/W

0	09/27/2023	ISSUED FOR PERMIT	MDF	EW	BJW
REV	DATE	DESCRIPTION	BY	CHKD	APP

TRANSMISSION ENGINEERING DEPARTMENT

SCALE: 1"=60'
DRAWN BY: MDF
ENGINEER: BJW
COUNTY: OKEECHOBEE
SHEET 2 OF 3

DATE: 3/31/2023
CHECKED BY: EW
SECTION: 10-35S-35E, 11-35S-35E
FILE NAME: FDOT Crossing Permit For HWY 441.dwg

2H.T00000030424

SWEATT-WHIDDEN 230KV LINE




SR-15 (US HWY 441)
FDOT ROAD CROSSING PERMIT



PICKETT AND ASSOCIATES, LLC
5010 WEST NASSAU STREET
TAMPA, FLORIDA 33607
C.A. NUMBER 31323
(813) 877-7770

Approved
2023-H-191-00264
11/9/2023

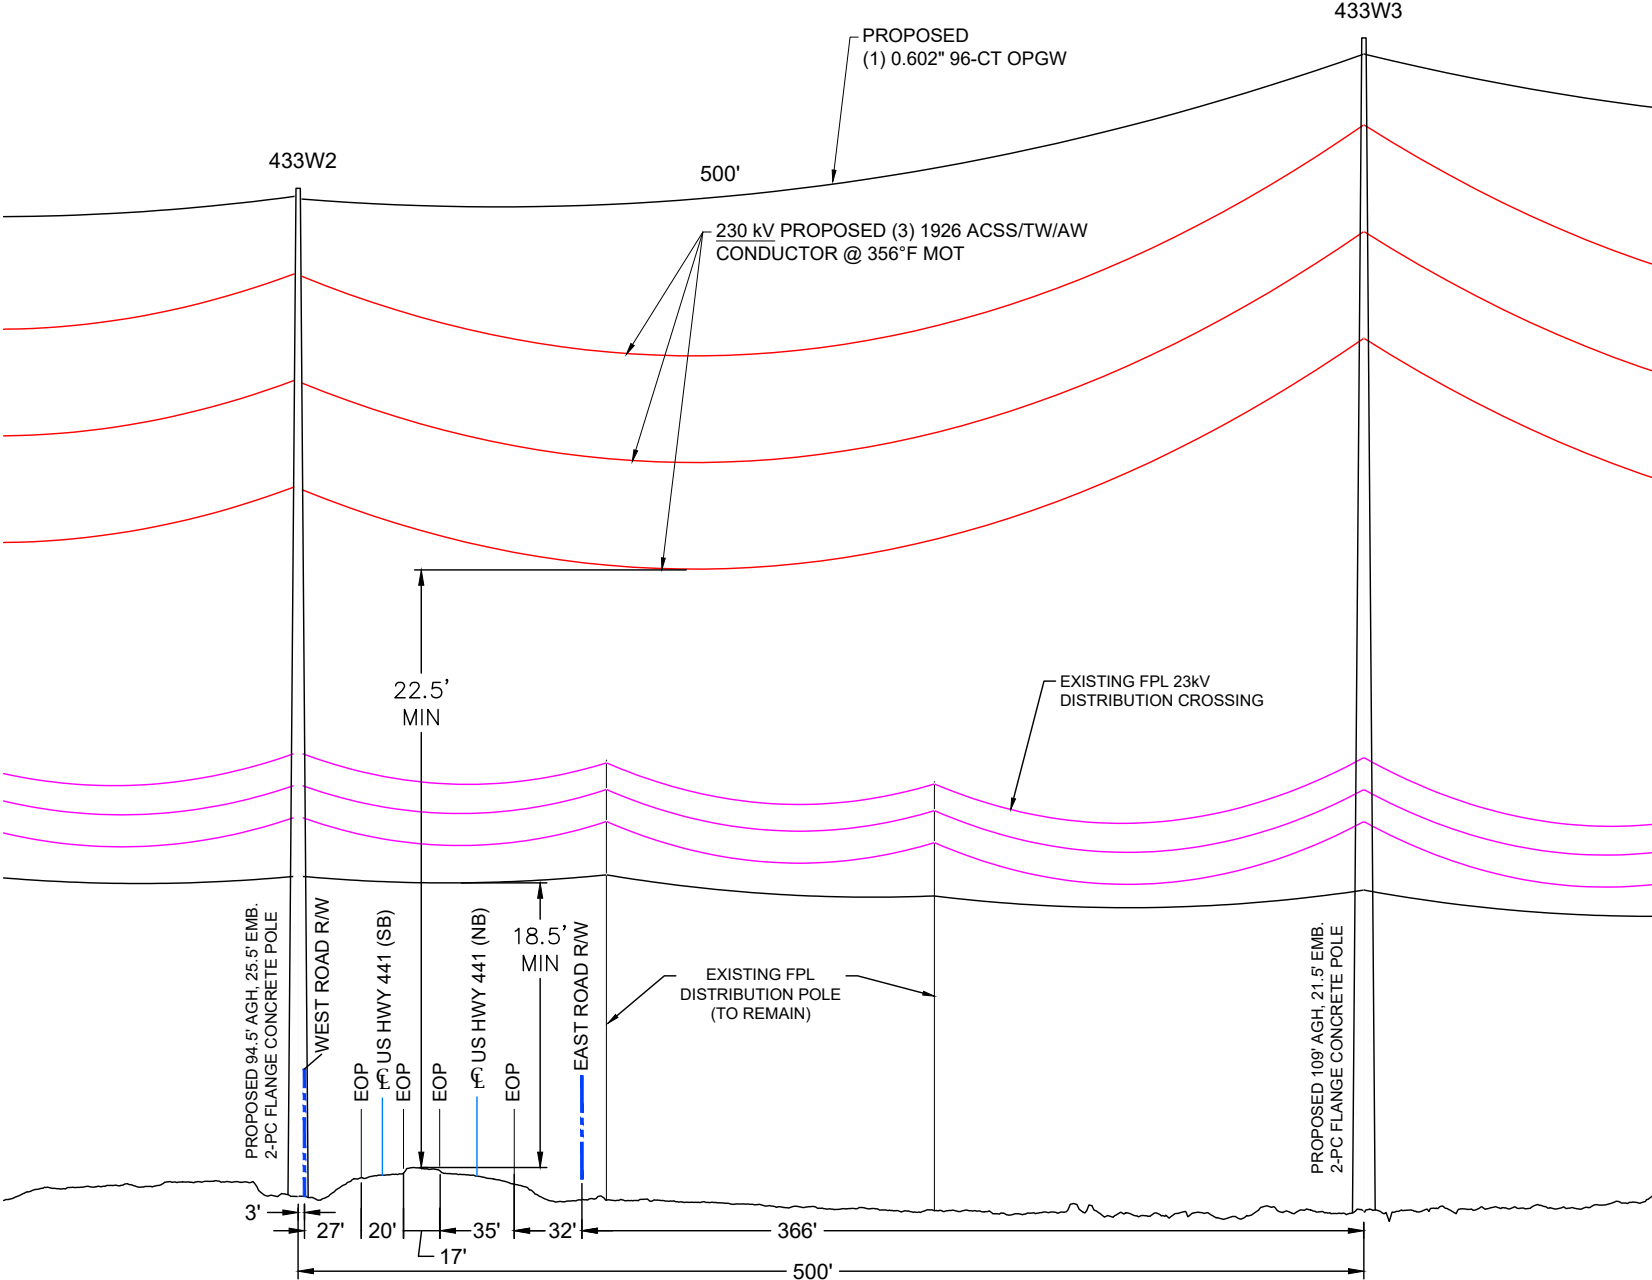

SR-15 (US HWY 441) CROSSING
PROPOSED SWEATT-WHIDDEN 230kV TRANSMISSION LINE
SEGMENT: SWEATT-BASINGER
PROFILE VIEW
LOOKING NORTH

NOTES:

1. COMPLIANCE WITH 2017 UAM, 2018 FLORIDA GREENBOOK & 2023-24 FDOT SPECIFICATIONS.
2. CONSTRUCTION AREA TO BE RESTORED TO EXISTING CONDITIONS AFTER CONSTRUCTION PERFORMED.
3. SOFT DIGS ARE SCHEDULED AS REQUIRED. LOCATE IDENTIFIED UNDERGROUND FACILITIES PRIOR TO CONSTRUCTION.
4. SEE ATTACHED STANDARD FDOT MOT INDEXES 102-601, 102-602, 102-603 & 102-625.
5. ALL POLE LOCATIONS WILL COMPLY WITH ADA REQUIREMENTS FOR WHEELCHAIR ACCESS.

SR-15 (US HWY 441)			009/27/2023ISSUED FOR PERMIT			MDF	EW	BJW
SECTION: 10	TOWNSHIP: 35S	RANGE: 35E	REV	DATE	DESCRIPTION	BY	CKD	APP
SECTION: 11	TOWNSHIP: 35S	RANGE: 35E						
AN APPLICATION TO INSTALL, OPERATE AND MAINTAIN 1-230kV TRANSMISSION LINE ALONG AND/OR ACROSS THE PROPERTY INDICATED ABOVE.			TRANSMISSION ENGINEERING DEPARTMENT			2H.T00000030424		
REFERENCE DATA			SCALE: N/A			DATE: 3/31/2023		
CROSSING OVER SR-15 (US HWY 441)			DRAWN BY: MDF			CHECKED BY: EW		
CROSSING DATA			ENGINEER: BJW			SECTION: 10-35S-35E, 11-35S-35E		
APPROX. 130 FEET LOCATED WITHIN ROAD R/W			COUNTY: OKEECHOBEE			FILE NAME: FDOT Crossing Permit For HWY 441.dwg		
			SHEET 3 OF 3			SWEATT-WHIDDEN 230kV LINE		
						SR-15 (US HWY 441)		
						FDOT ROAD CROSSING PERMIT		




PICKETT AND ASSOCIATES, LLC
5010 WEST NASSAU STREET
TAMPA, FLORIDA 33607
C.A. NUMBER 31323
(813) 877-7770



Approved
2023-H-191-00264
11/9/2023

10/6/2022 1:23:55 PM

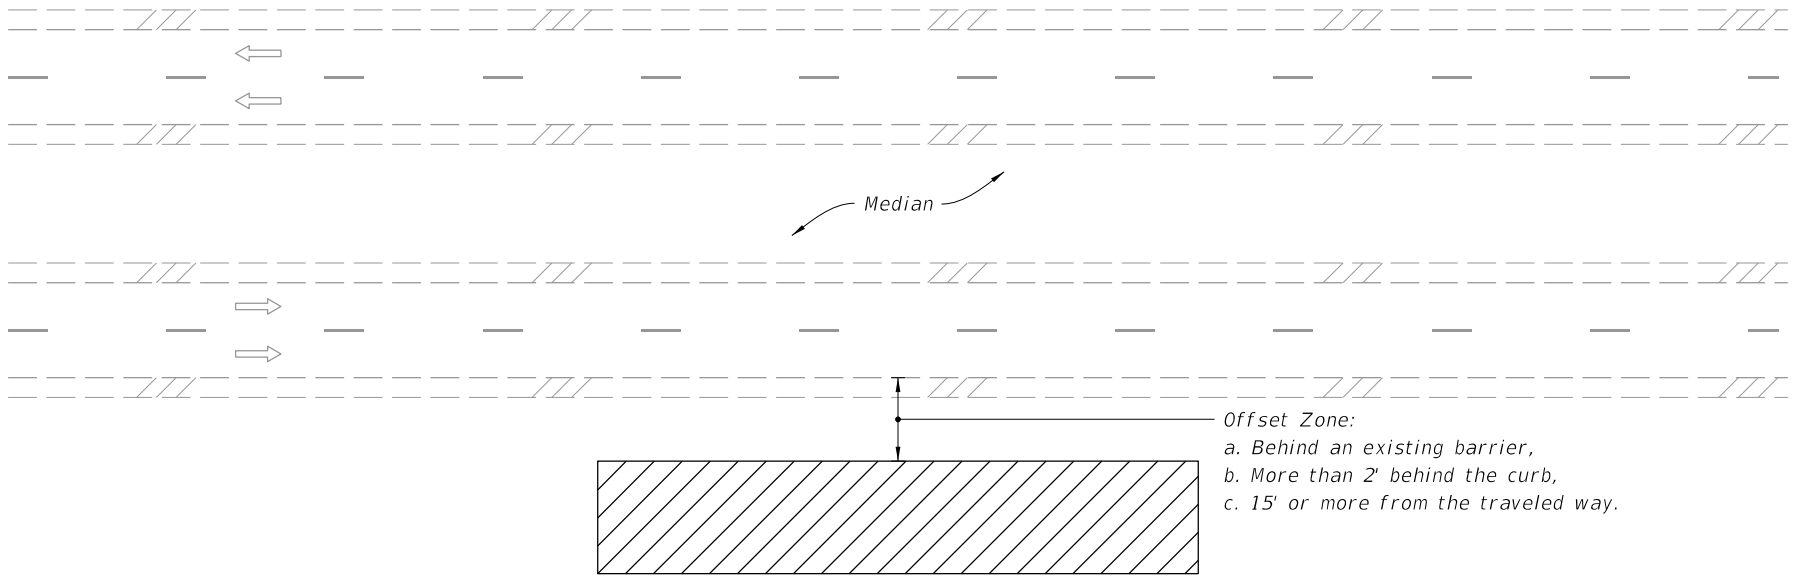

MULTILANE ROADWAY SHOWN, TWO-LANE ROADWAY SIMILAR

NOTES:

1. This Index applies to Two-Lane, Two-Way and Multilane Roadways, including Medians of divided roadways, with work beyond the shoulder.
2. Use Index 102-602 when the work operation (excluding establishing and terminating the work area) requires that two or more work vehicles cross the Offset Zone in any one hour period.
3. Use Index 102-660 when Work Area encroaches a Sidewalk.

SYMBOLS:

-  Work Area
-  Lane Identification and Direction of Traffic



FY 2023-24
STANDARD PLANS

TWO-LANE AND MULTILANE ROADWAY,
WORK BEYOND THE SHOULDER

INDEX
102-601

SHEET
1 of 1


Approved
2023-H-191-00264
Douglas Stewart
11/9/2023

NOTE:


1. This Index applies to Two-Lane, Two-Way and Multilane Roadways, including Medians of divided roadways, with work on the shoulder.
2. L = Taper Length
 X = Work Zone Sign Spacing
 B = Buffer Length
See Index 102-600 for "L", "X", "B", and channelizing device spacing values.
3. Where work activities are between 2' and 15' from the edge of traveled way, the Engineer may omit signs and channelizing devices for work operations 60 minutes or less.
4. When four or more work vehicles enter the through traffic lanes in a one hour period (excluding establishing and terminating the work area), use a flagger or lane closure to accommodate work vehicle ingress and egress.
5. For work less than 2' from the traveled way and work zone speed is greater than 45 MPH, use a lane closure.
6. The "Speeding Fines Doubled When Workers Present" signs (MOT-13-06) and "End Road Work" Signs (G20-2) along with the associated work zone sign spacing distances may be omitted when the work operation is in place for 24 hours or less.
7. Temporary pavement markings may be omitted when the work operation is in place for 3 days or less.
8. Omit "Shoulder Closed" signs (W21-5a) along with associated work zone sign spacing distances for work on the median.
9. When there is no paved shoulder, the "Worker" sign (W21-1) may be used instead of the "Shoulder Closed" sign (W21-5a).

SYMBOLS:

-  Work Area
-  Channelizing Device (See Index 102-600)
-  Work Zone Sign
-  Lane Identification and Direction of Traffic

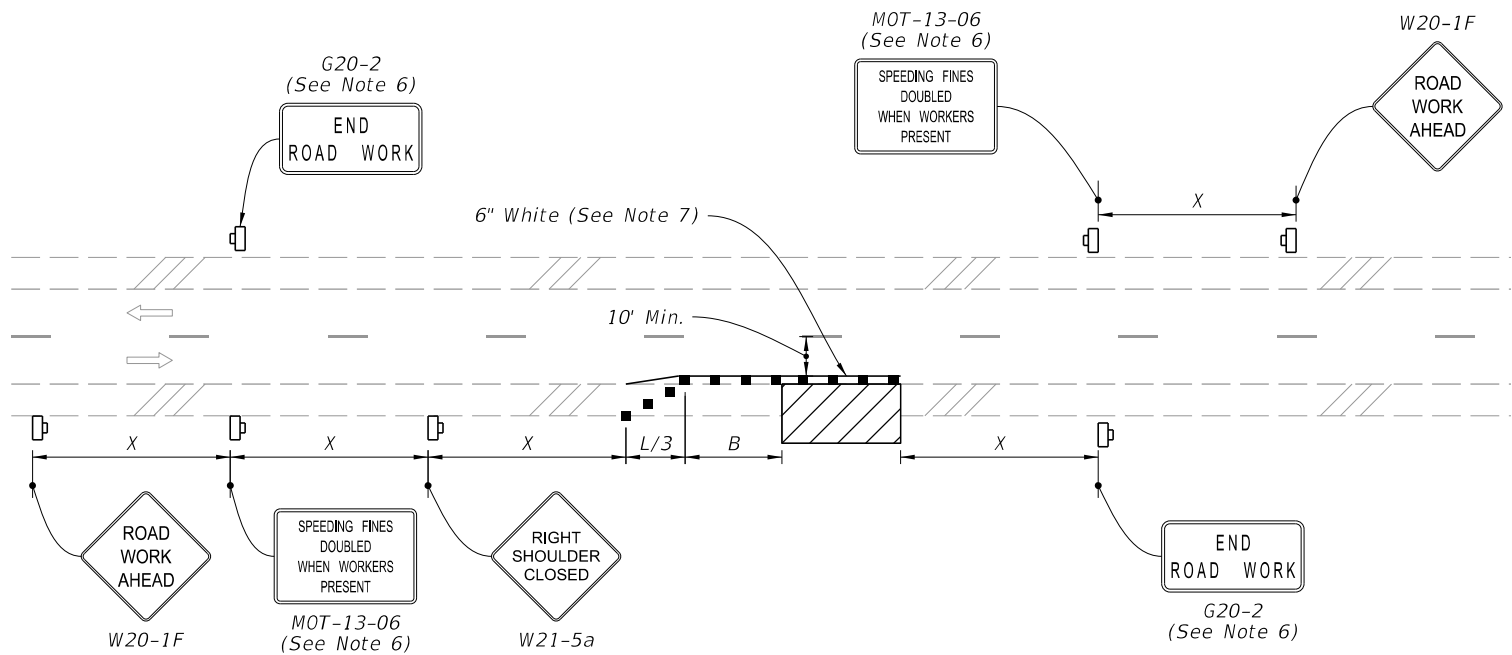

TWO-LANE ROADWAY
SHOULDER WORK LESS THAN 2' FROM THE TRAVELED WAY
WITH WORK ZONE SPEED OF 45 MPH OR LESS

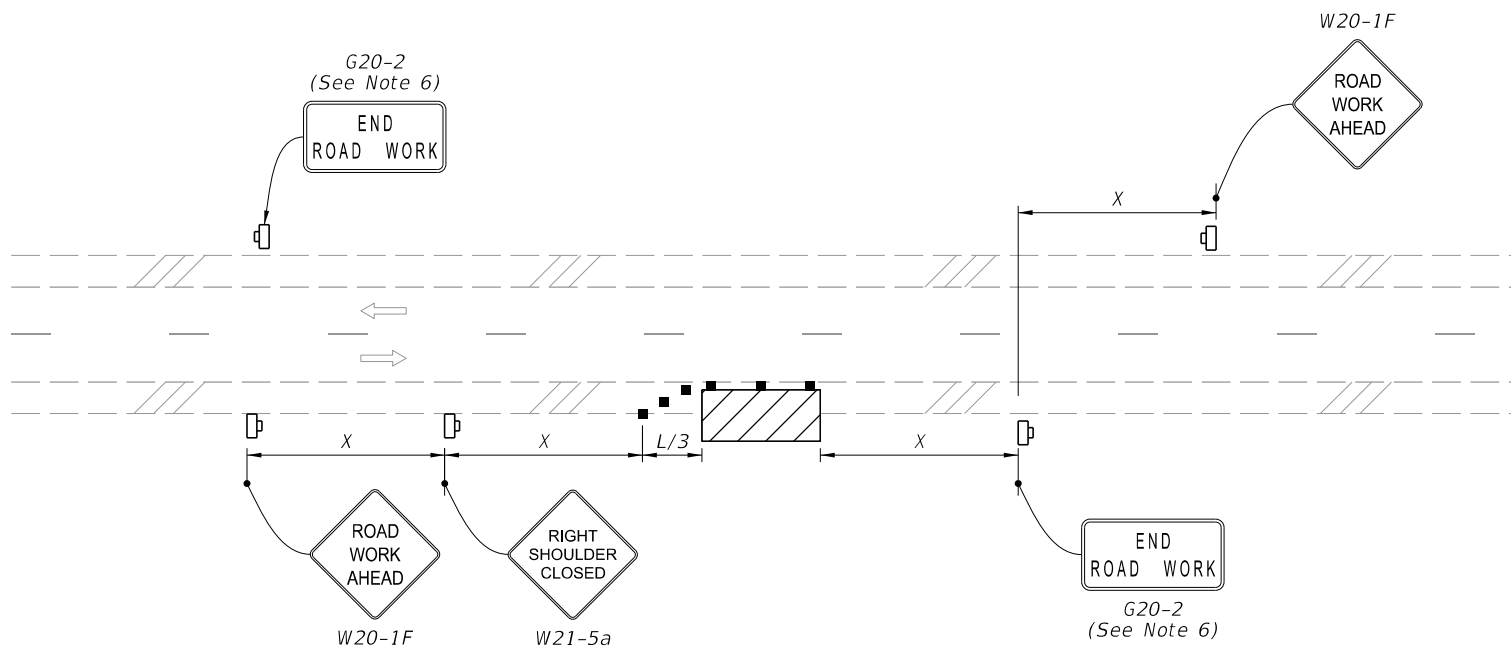

TWO-LANE ROADWAY
SHOULDER WORK BETWEEN 2' AND 15' FROM THE TRAVELED WAY

2/2/2023 10:33:35 AM




FY 2023-24
STANDARD PLANS


TWO-LANE AND MULTILANE, WORK ON SHOULDER

Approved
2023-H-191-00264
Douglas Stewart
INDEX
102-602
SHEET
11/9/2023
1 of 2

2/2/2023 10:33:38 AM

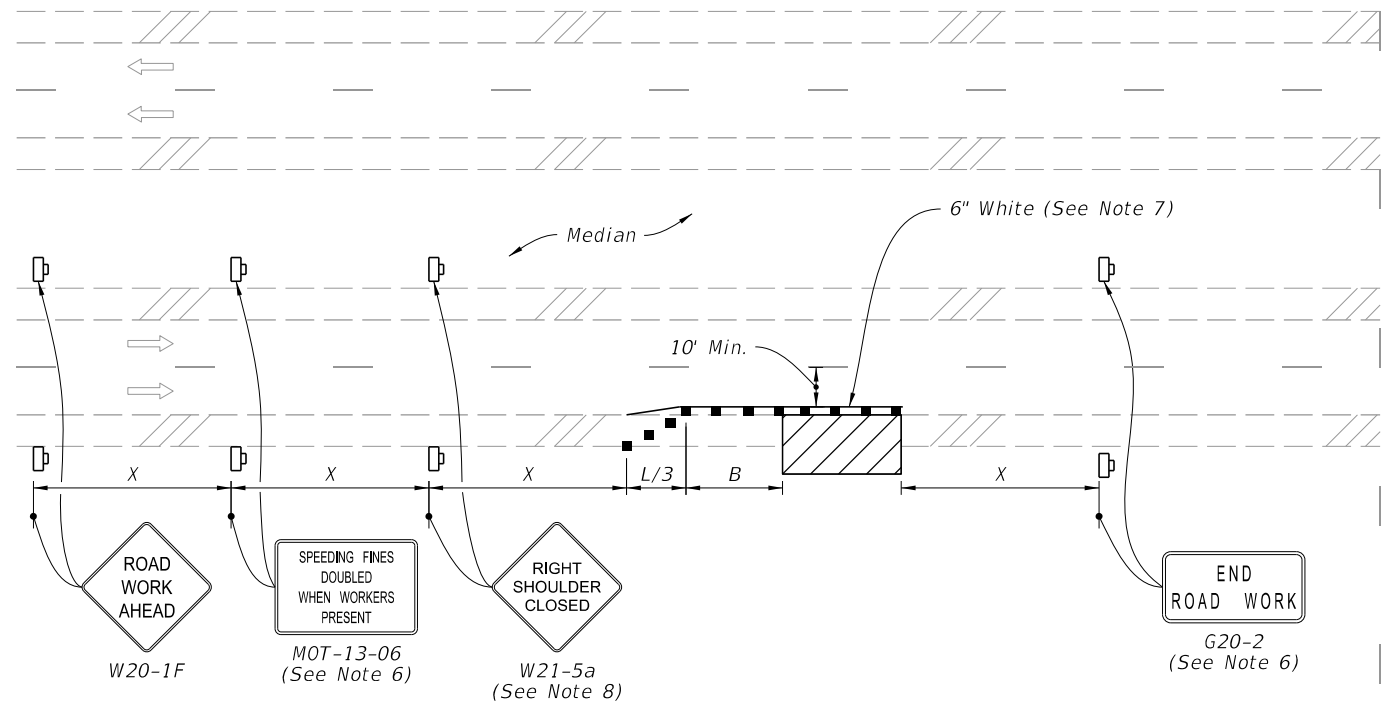

MULTILANE ROADWAY
SHOULDER WORK LESS THAN 2' FROM THE TRAVELED WAY
WITH WORK ZONE SPEED OF 45 MPH OR LESS

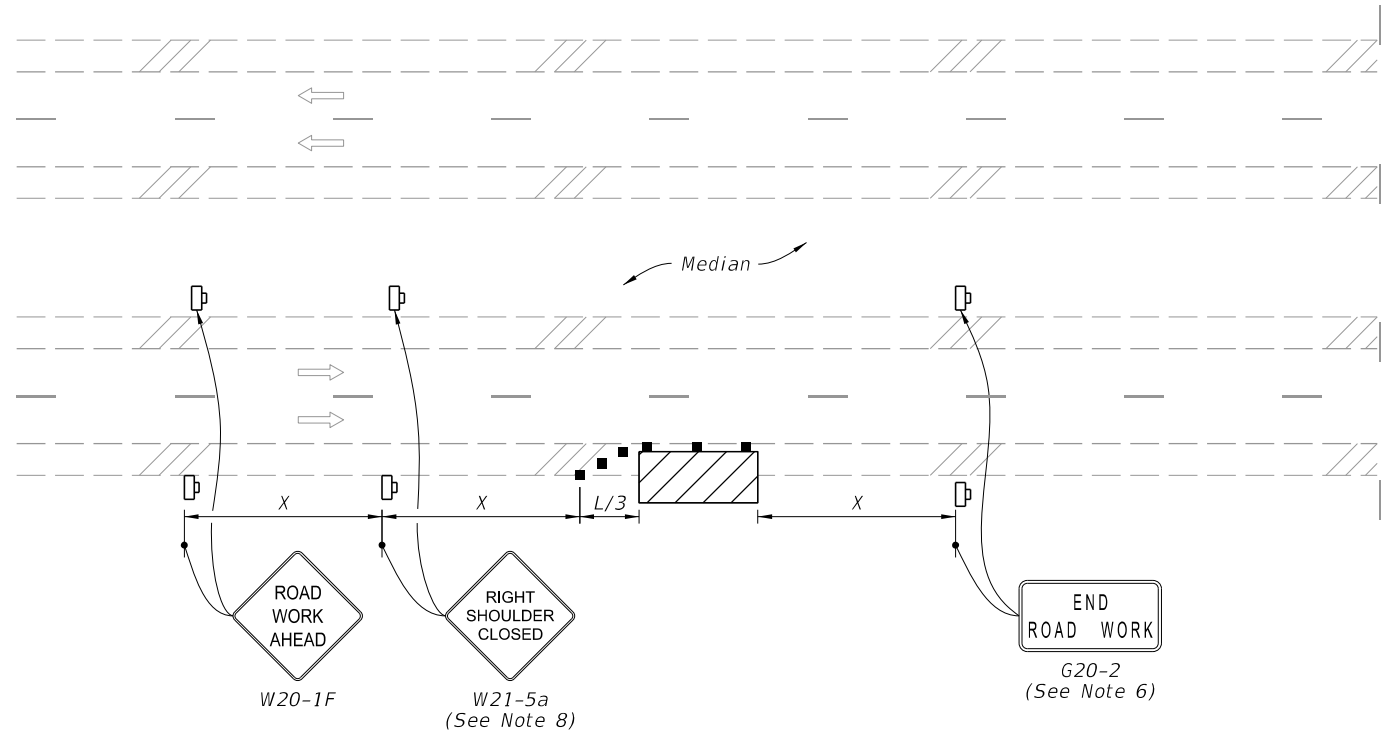

MULTILANE ROADWAY
SHOULDER WORK BETWEEN 2' AND 15' FROM THE TRAVELED WAY

- SYMBOLS:**
- Work Area
 - Channelizing Device (See Index 102-600)
 - Work Zone Sign
 - Lane Identification and Direction of Traffic



FY 2023-24
STANDARD PLANS


TWO-LANE AND MULTILANE, WORK ON SHOULDER

Approved
2023-H-191-00264
Douglas Stewart
11/9/2023
INDEX SHEET
102-602 2 of 2

LAST REVISION	DESCRIPTION:
11/01/20	


REVISION

10/6/2022 1:24:30 PM

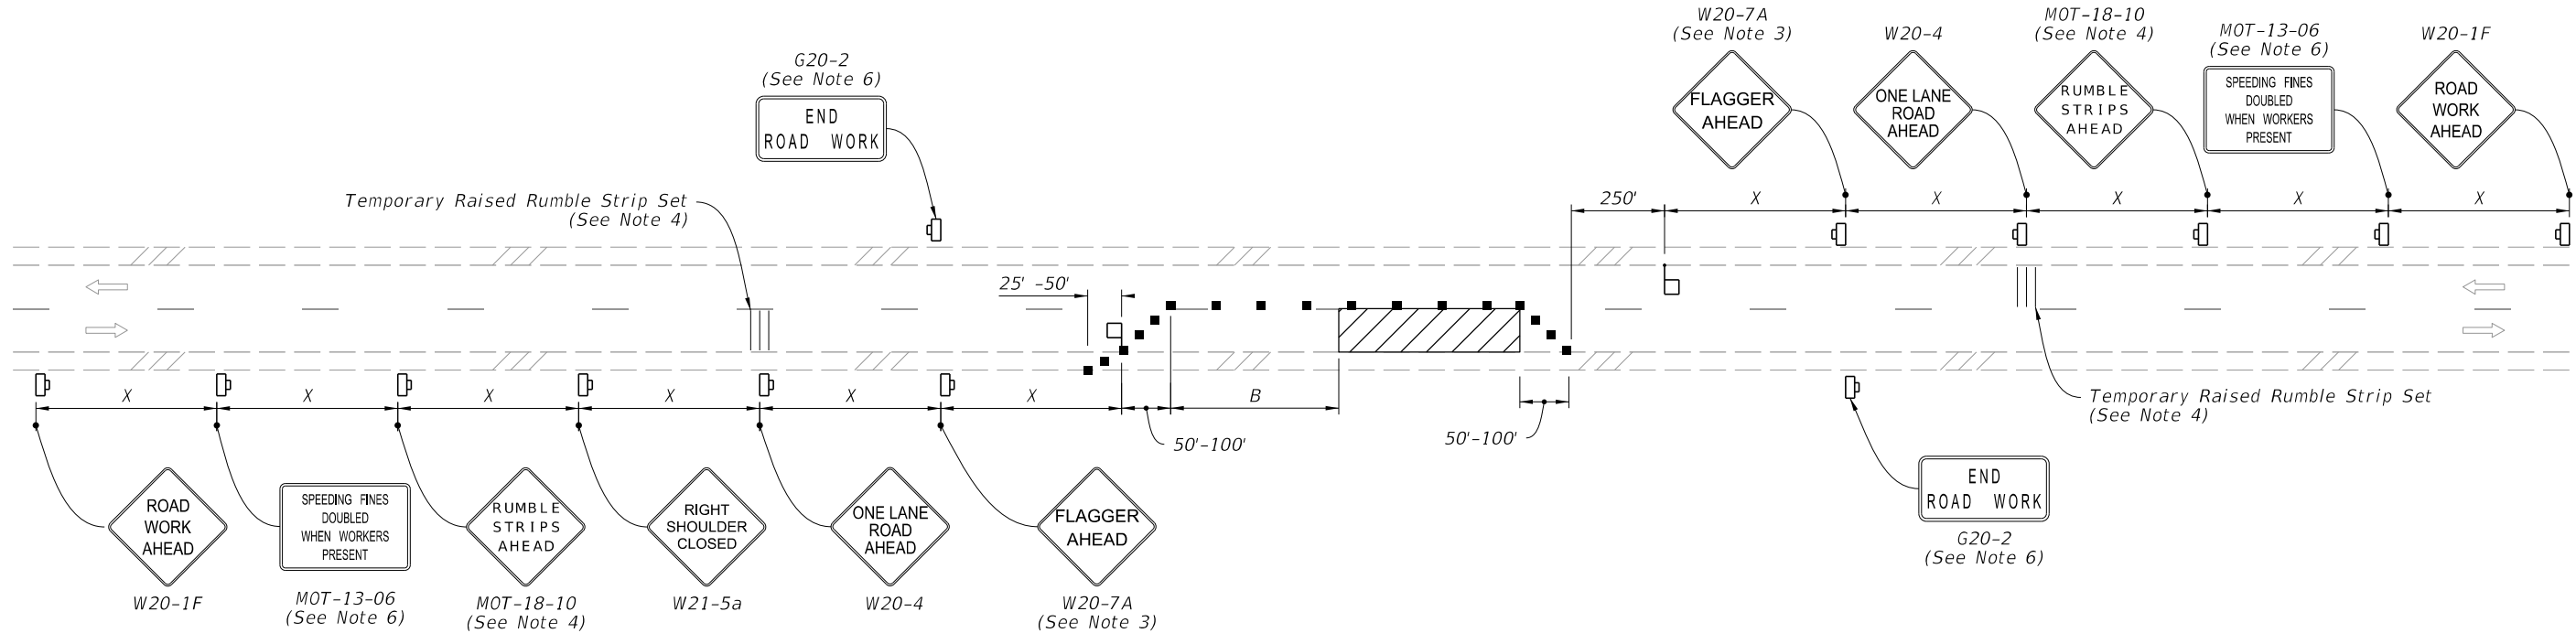


NOTES:

1. This Index applies to Two-Lane, Two-Way Roadways with work within the traveled way.
2. L = Taper Length
B = Buffer Length
X = Work Zone Sign Spacing
See Index 102-600 for "L", "B", "X" and channelizing device spacing values.
3. Optionally, use "Flagger Ahead" sign with symbol (W20-7) instead of "Flagger Ahead" sign with text (W20-7A).
4. Use temporary raised rumble strips when the existing posted speed is 55 mph or greater and the work duration is greater than 60 minutes. If temporary raised rumble strips are not used, omit "Rumble Strips Ahead" signs (MOT-18-10) and associated work zone sign spacing.
5. Additional one-way control may be provided by the following means:
 - a. Flag-carrying vehicle
 - b. Official vehicle
 - c. Pilot vehicles
 - d. Traffic signals
6. The "Speeding Fines Doubled When Workers Present" signs (MOT-13-06) and "End Road Work" signs (G20-2), along with associated work zone sign spacing, may be omitted when the work operation will be in place for 24 hours or less.
7. Automated Flagger Assistance Devices (AFADs) may be used in accordance with Specification Sections 102, 990 and the APL vendor drawings.
8. Railroad Crossings:
 - a. If an active railroad crossing is located closer to the Work Area than the queue length plus 300 feet, extend the Buffer Space as shown on Sheet 2.
 - b. If the queuing of vehicles across an active railroad crossing cannot be avoided, provide a uniformed traffic control officer or flagger at the highway-rail grade crossing to prevent vehicles from stopping within the highway-rail grade crossing, even if automatic train warning devices are in place.

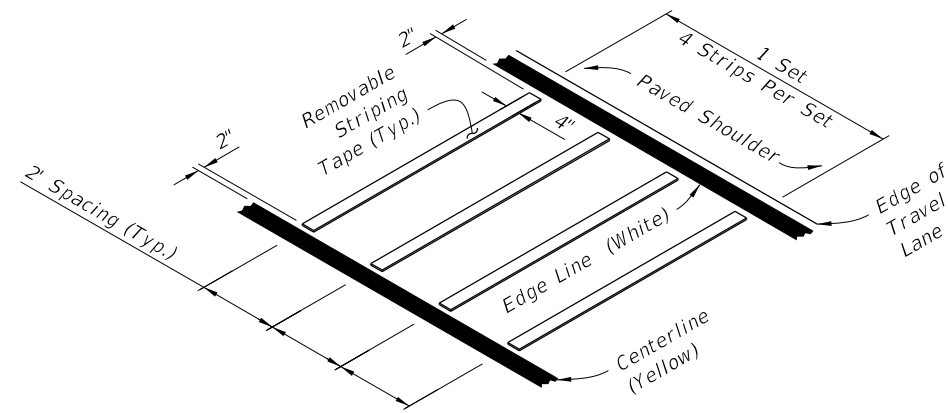

**OPTION - 1
REMOVABLE STRIPING TYPE**


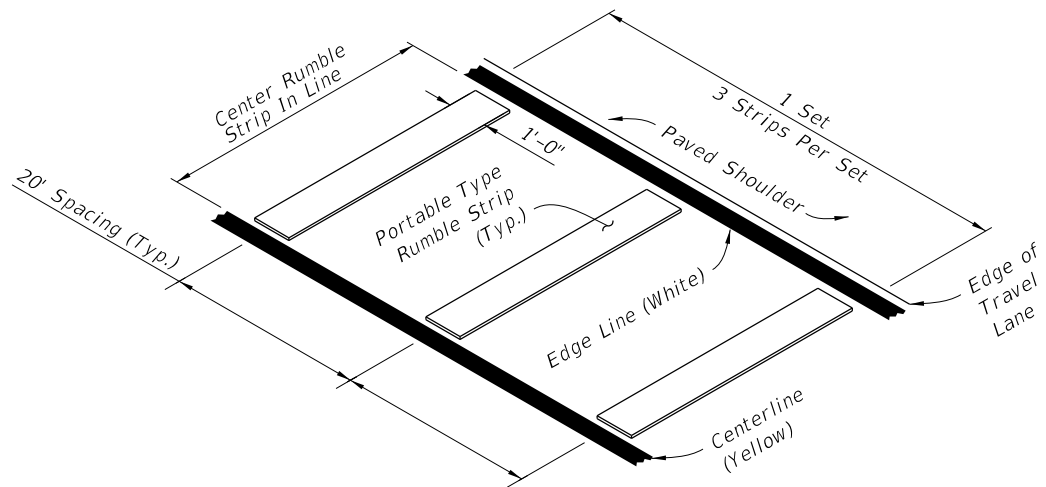


**OPTION - 2
PORTABLE TYPE**

SYMBOLS:

- Work Area
- Channelizing Device (See Index 102-600)
- Work Zone Sign
- Flagger
- Lane Identification and Direction of Traffic

Approved
2023-11-191-00264
Douglas Stewart
11/9/2023

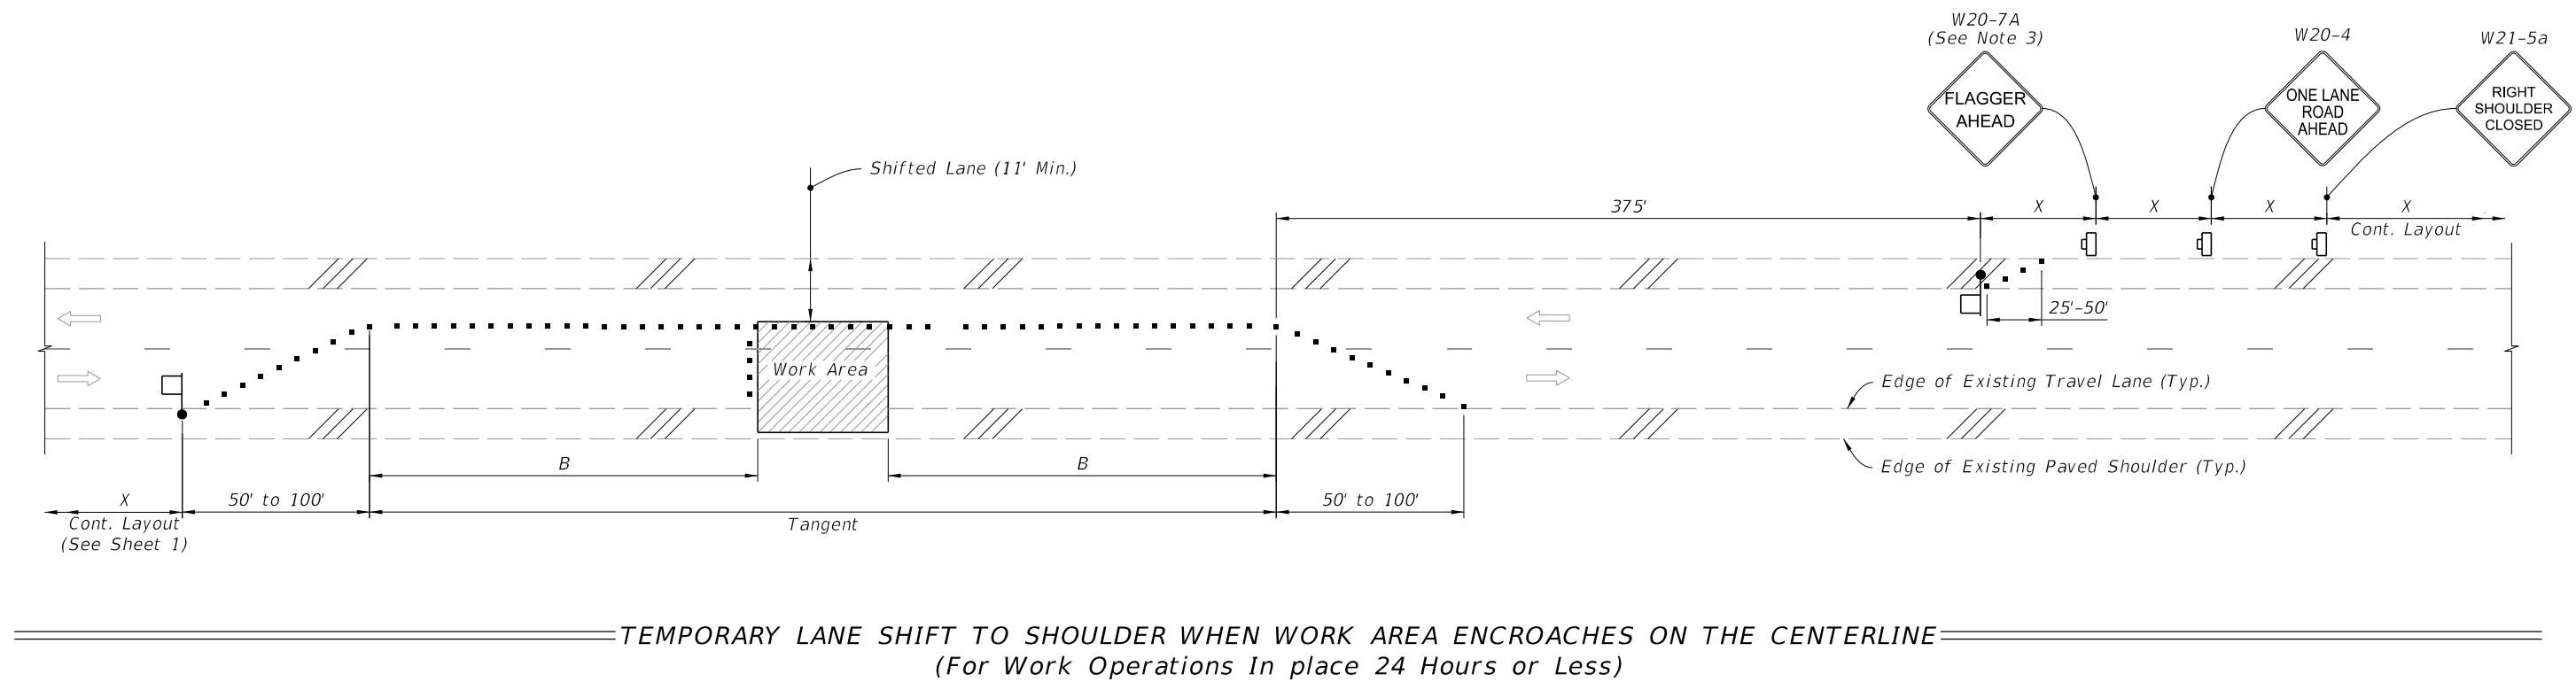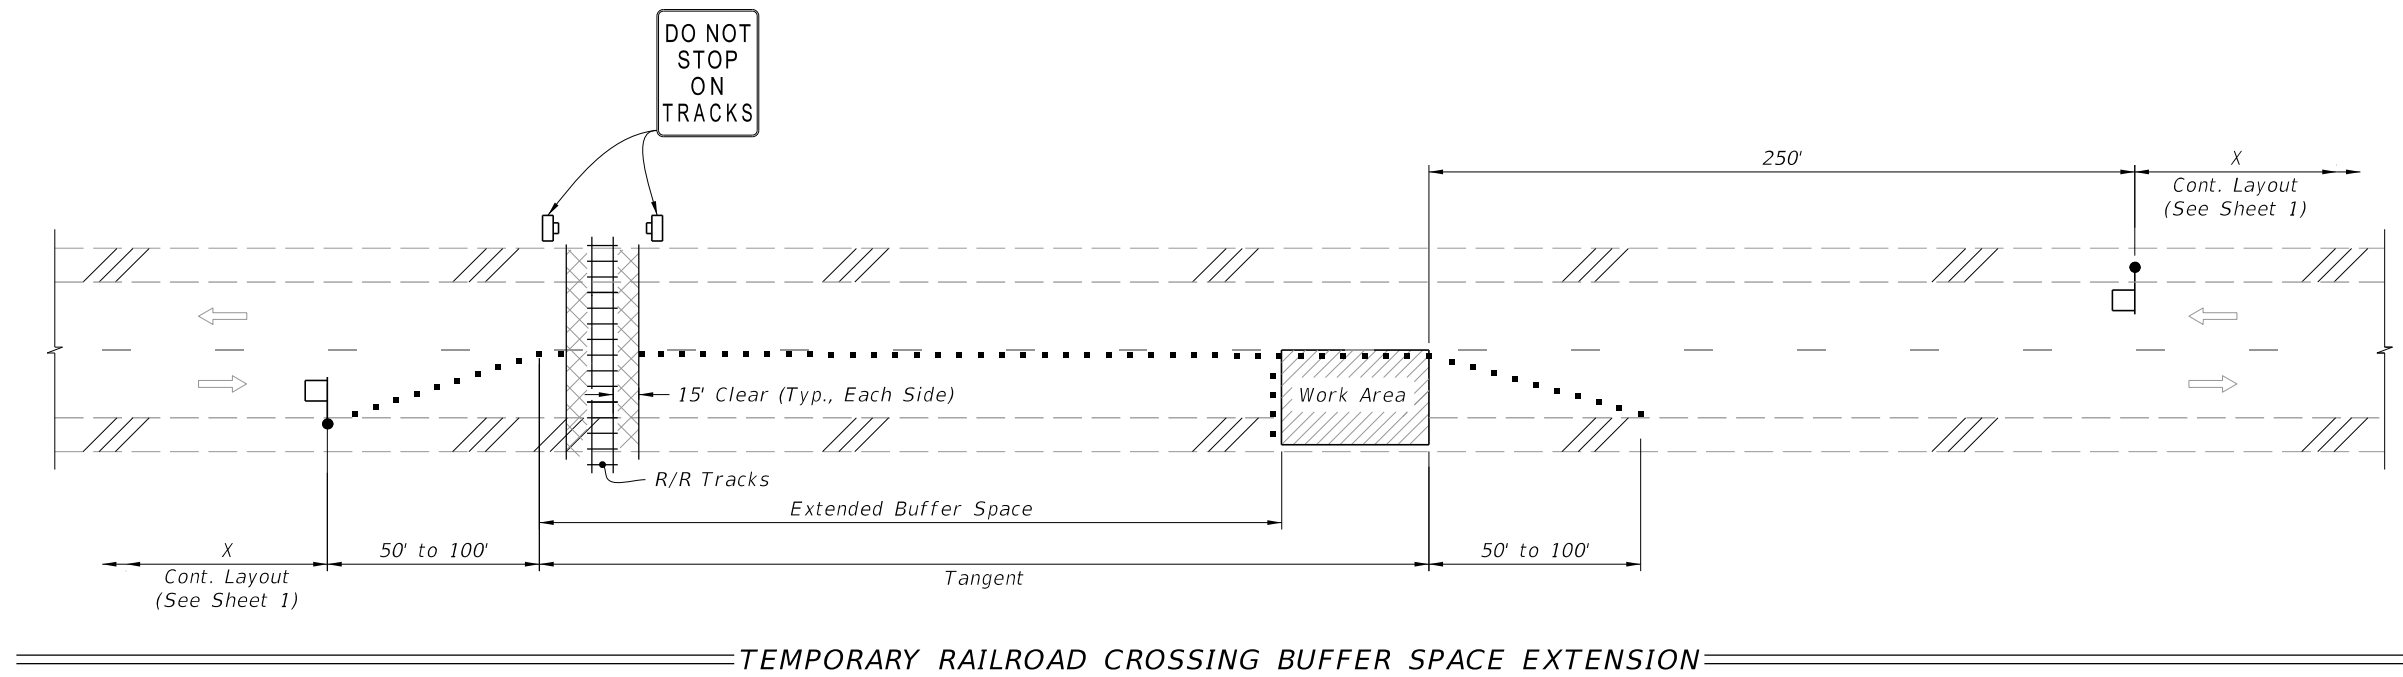


SYMBOLS:

- Work Area
- Channelizing Device (See Index 102-600)
- Work Zone Sign
- Flagger
- Lane Identification and Direction of Traffic

10/6/2022 1:24:30 PM

LAST REVISION 11/01/21	REVISION DESCRIPTION:	FY 2023-24 STANDARD PLANS	TWO-LANE, TWO-WAY WORK WITHIN THE TRAVEL WAY		INDEX 102-603	SHEET 2 of 2

Approved
SPECIAL CONDITIONS
 2022-11-09-264
 Douglas Stewart
 11/9/2023

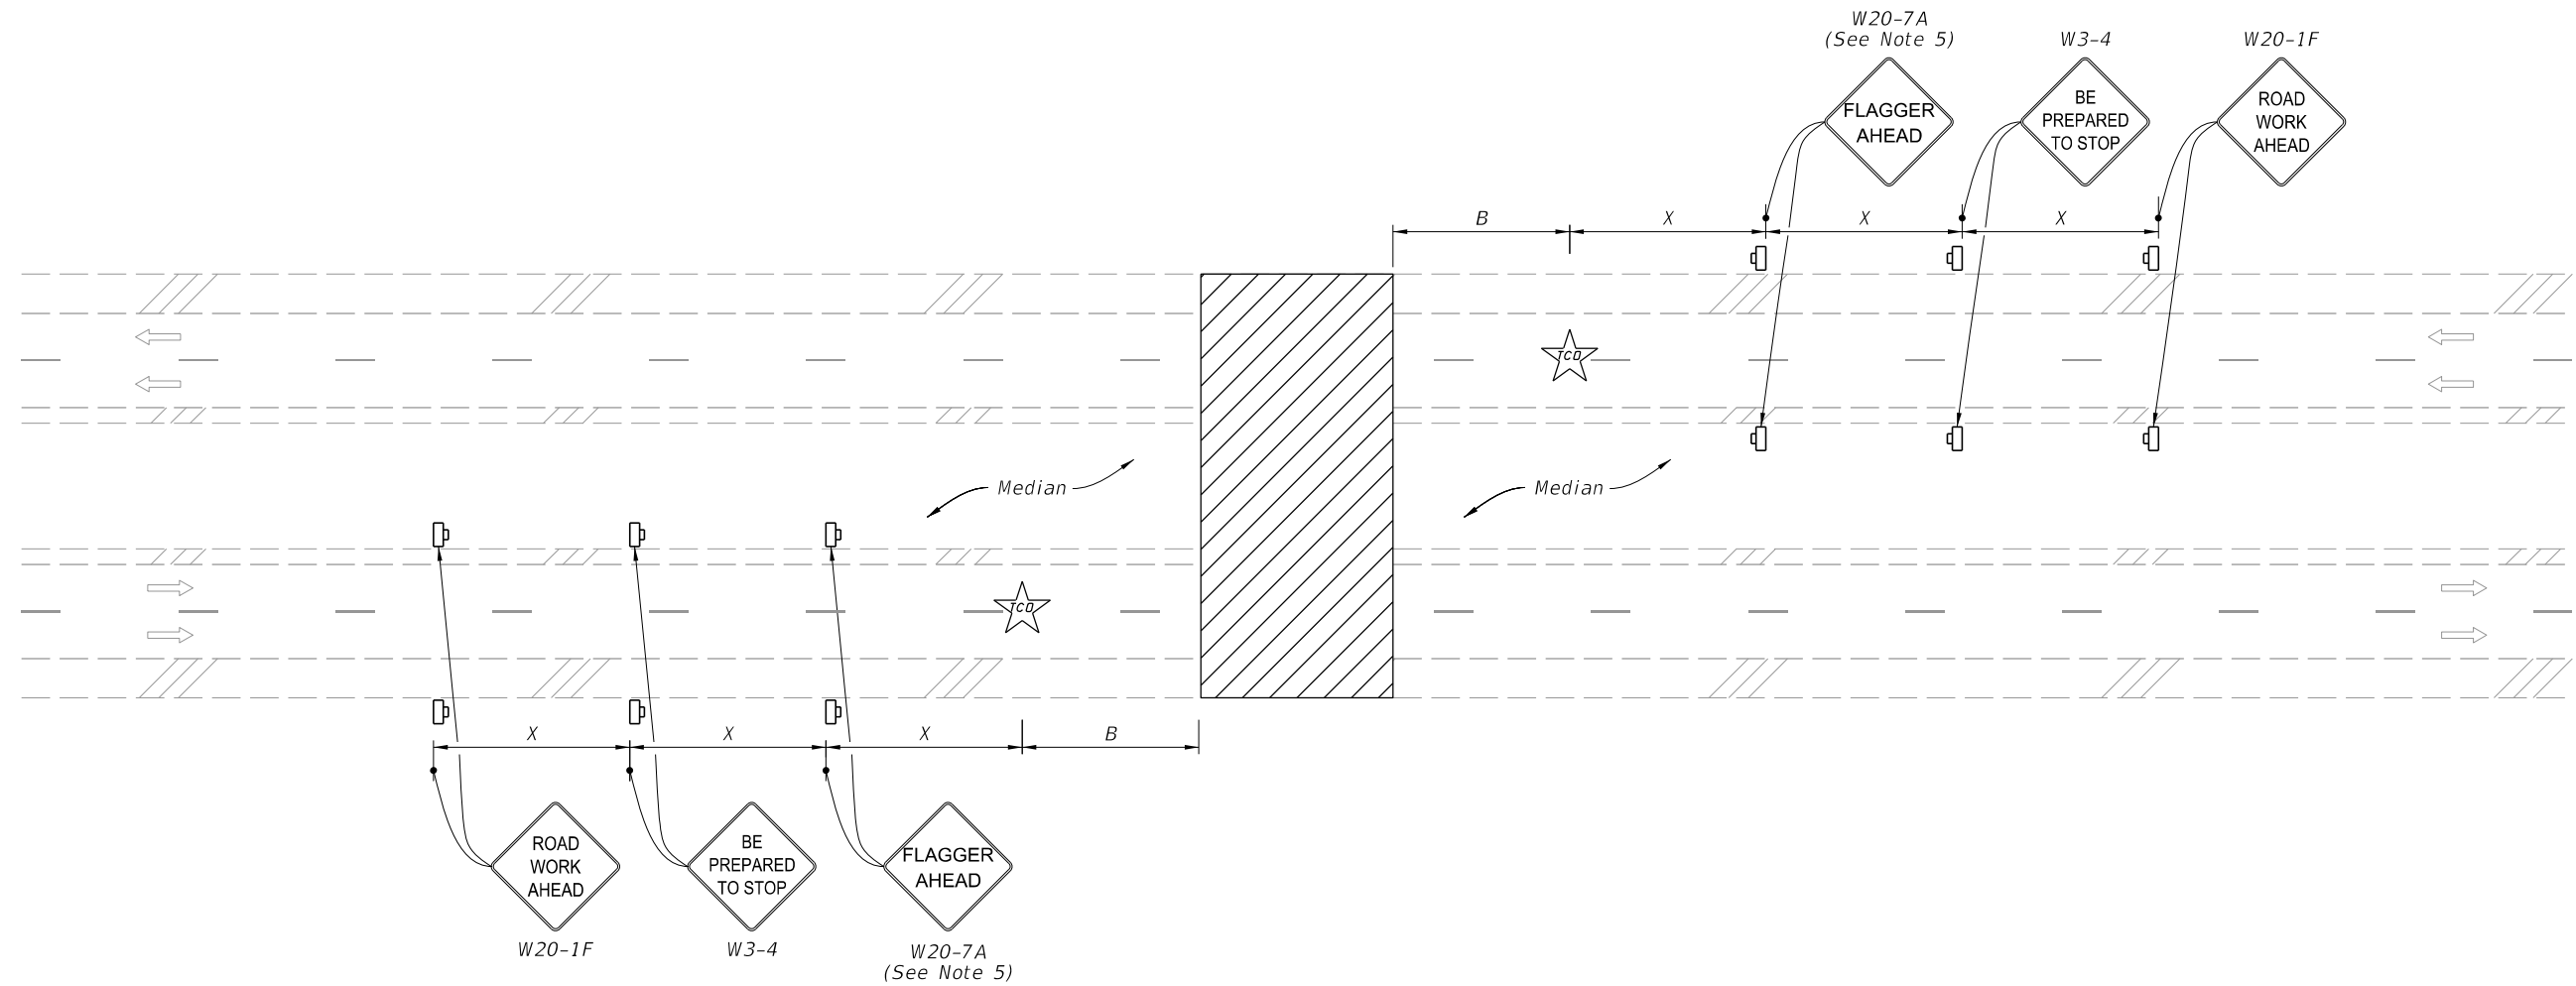

(Multilane Roadway Shown, Two-Lane Roadway Similar)

SYMBOLS:

-  Work Area
-  Traffic Control Officer
-  Lane Identification and Direction of Traffic



NOTES:

1. This Index applies to two-lane, two-way and multilane roadways, except limited access facilities, with temporary daytime roadway closures of 5 minutes or less.
2. B = Buffer Length
 X = Work Zone Sign Distance
See Index 102-600 for " B " and " X " values.
3. For Two-Lane Roadways, a Flagger may substitute the traffic control officer with approval of the Engineer.
4. Traffic volume or complexity of the roadway may dictate additional signs, devices or traffic control officers.
5. Optionally, use FLAGGER AHEAD sign with symbol (W20-7) instead of FLAGGER AHEAD sign with text (W20-7A).
6. Dual Signs are required for divided roadways only.

10/6/2022 1:27:33 PM

Approved
2023-H-191-00264
Douglas Stewart
11/9/2023

SR-70 PROJECT
PROPOSED SWEATT - WHIDDEN 230KV LINE
SWEATT - BASINGER SECTION US 441
FDOT PARALLELISM EXHIBIT

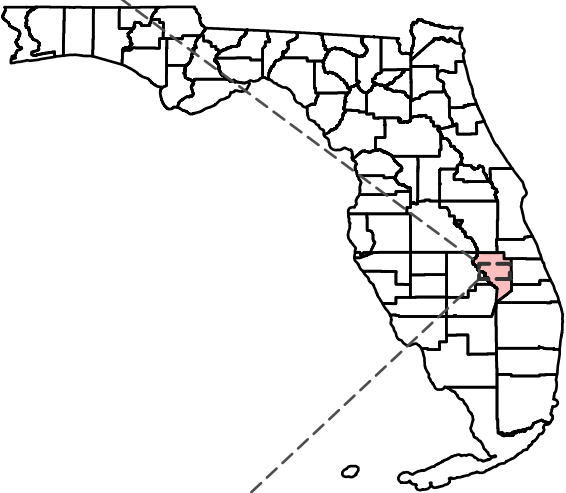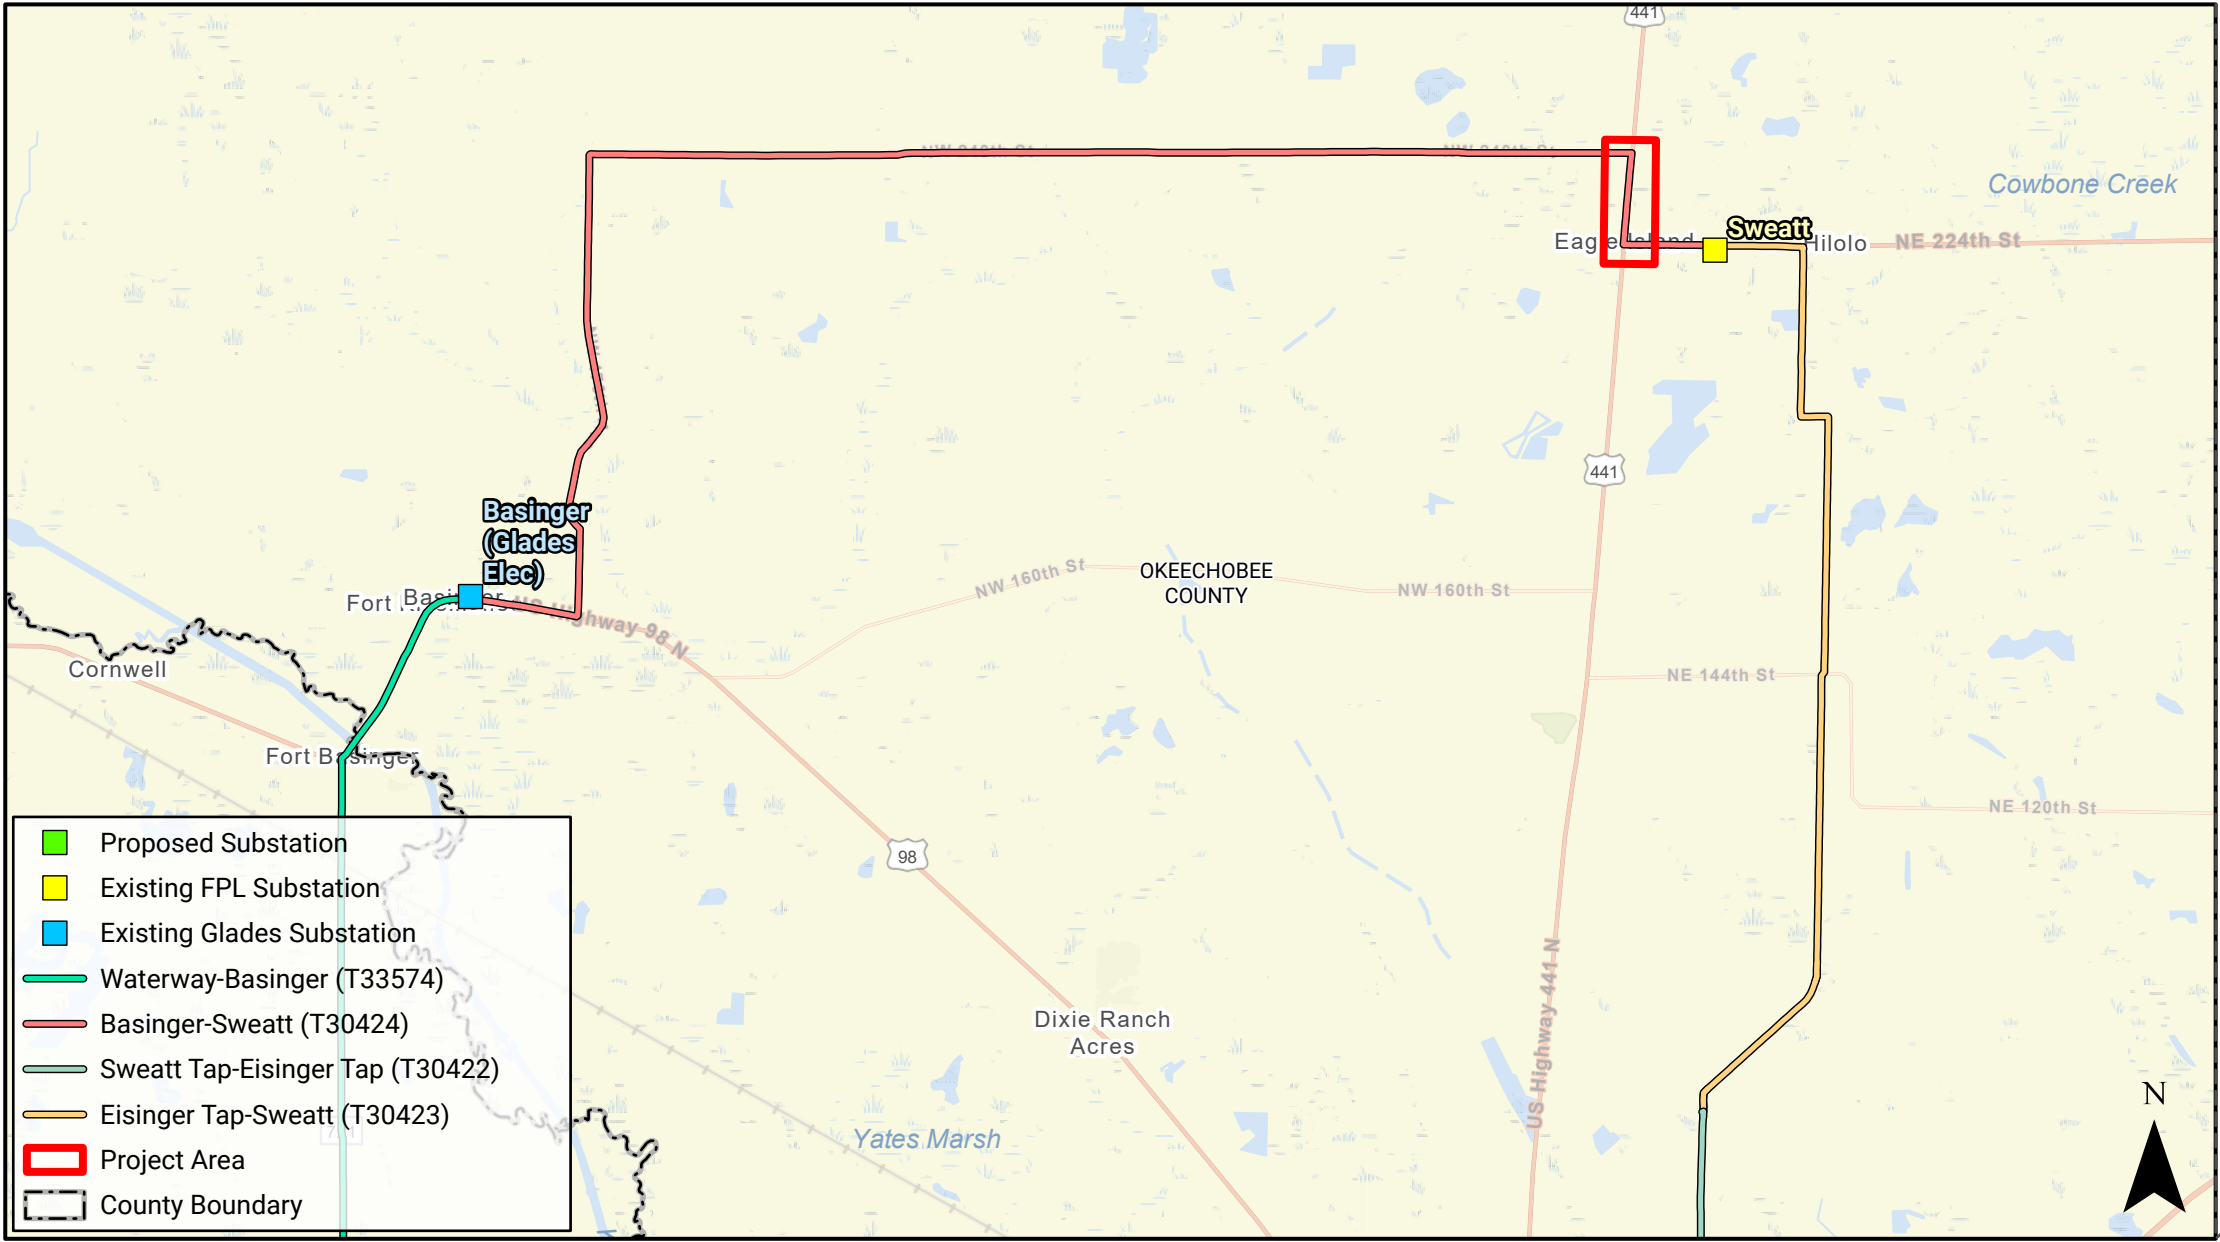

PROJECT LOCATION
OKEECHOBEE COUNTY

Permit to use FDOT Road R/W for installation of matting for construction of new 230kV Transmission Line. The Transmission Structures will be installed in FPL Easement on private property. MOT will be performed by the contractor in order to safely enter and exit the right of way at each work location. Note that only a few poles will be able to be worked each day.

Okeechobee County Roads NE 224th, NE 240th, and NW 176th will be permitted under separate cover.

NOTES:

- 1. COMPLIANCE WITH 2017 UAM, 2018 FLORIDA GREENBOOK & 2023-24 FDOT SPECIFICATIONS.
- 2. CONSTRUCTION AREA TO BE RESTORED TO EXISTING CONDITIONS AFTER CONSTRUCTION PERFORMED.
- 3. SOFT DIGS ARE SCHEDULED AS REQUIRED. LOCATE IDENTIFIED UNDERGROUND FACILITIES PRIOR TO CONSTRUCTION.
- 4. SEE ATTACHED STANDARD FDOT MOT INDEXES 102-601, 102-602, 102-603, 102-625.
- 5. ALL POLE LOCATIONS WILL COMPLY WITH ADA REQUIREMENTS FOR WHEELCHAIR ACCESS.

A	11/3/2023	ISSUED FOR SUBMITTAL	CAC	BJW	BJW
REV	DATE	DESCRIPTION	BY	CKD	APP

FLORIDA POWER & LIGHT COMPANY

2H.T00000030424

SCALE: NTS
DRAWN BY: CAC
ENGINEER: BJW
COUNTY: OKEECHOBEE
SHEET 1 OF 7

DATE: 11/3/2023
CHECKED BY: BJW
SECTION: AS SHOWN



SWEATT-WHIDDEN 230KV LINE
US 441 FDOT PARALLELISM EXHIBIT
COVER SHEET



Existing FPL Substation

Existing Glades Substation

Project Centerline

Map Sheet Boundary

A	10/24/2023	ISSUED FOR SUBMITTAL	CAC	BJW	BJW
REV	DATE	DESCRIPTION	BY	CKD	APP

FLORIDA POWER & LIGHT COMPANY

2H.T00000030424

SCALE: NTS
DRAWN BY: CAC
ENGINEER: BJW
COUNTY: OKEECHOBEE
SHEET: 2 OF 7

DATE: 10/24/2023
CHECKED BY: BJW
SECTION: AS SHOWN





SWEATT-WHIDDEN 230KV LINE
US 441 FDOT PARALLELISM EXHIBIT
INDEX MAP

This product is for informational purposes only and may not have been prepared for legal, engineering, or surveying purposes. It does not represent an on-the-ground survey and represents only the approximate relative location of displayed information.



	US HWY 441		A	10/24/2023	ISSUED FOR SUBMITTAL			CAC	BJW	BJW
			REV	DATE	DESCRIPTION			BY	CKD	APP
	FLORIDA POWER & LIGHT COMPANY 2H.T00000030424									
	SCALE: NTS DRAWN BY: CAC ENGINEER: BJW COUNTY: OKEECHOBEE SHEET: 3 OF 7				DATE: 10/24/2023 CHECKED BY: BJW SECTION: AS SHOWN				SWEATT - WHIDDEN 230KV LINE FDOT PARALLELISM EXHIBIT PROPOSED PHOTO SIMULATION	

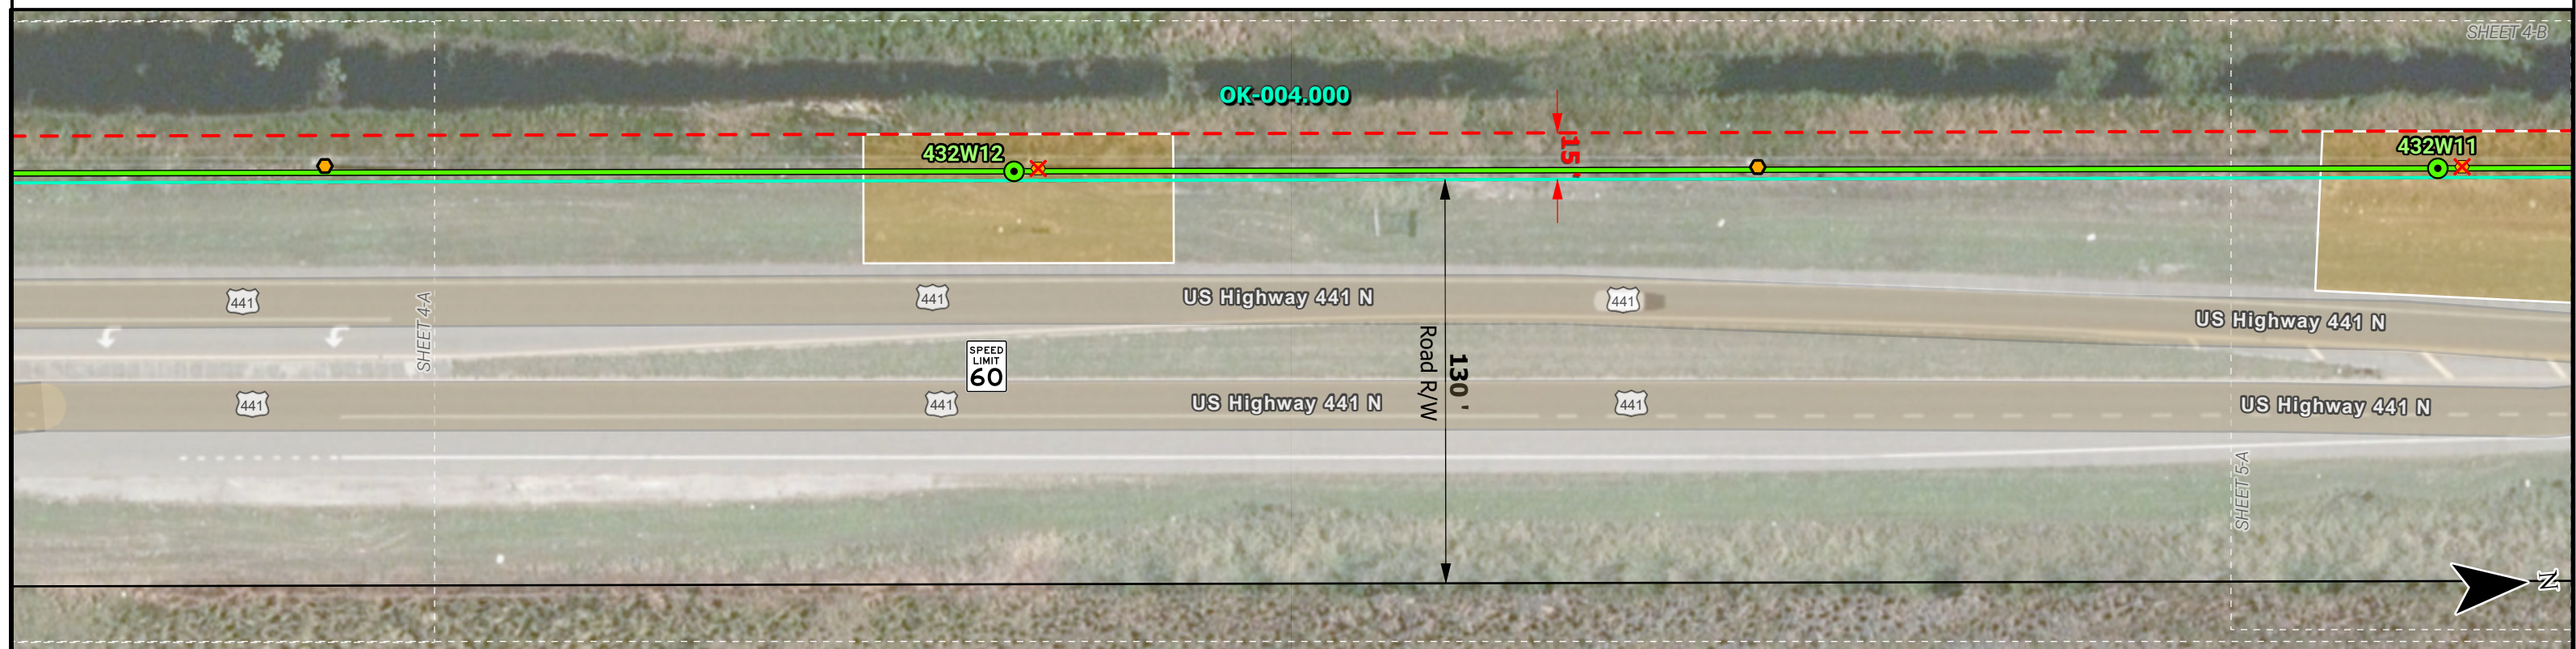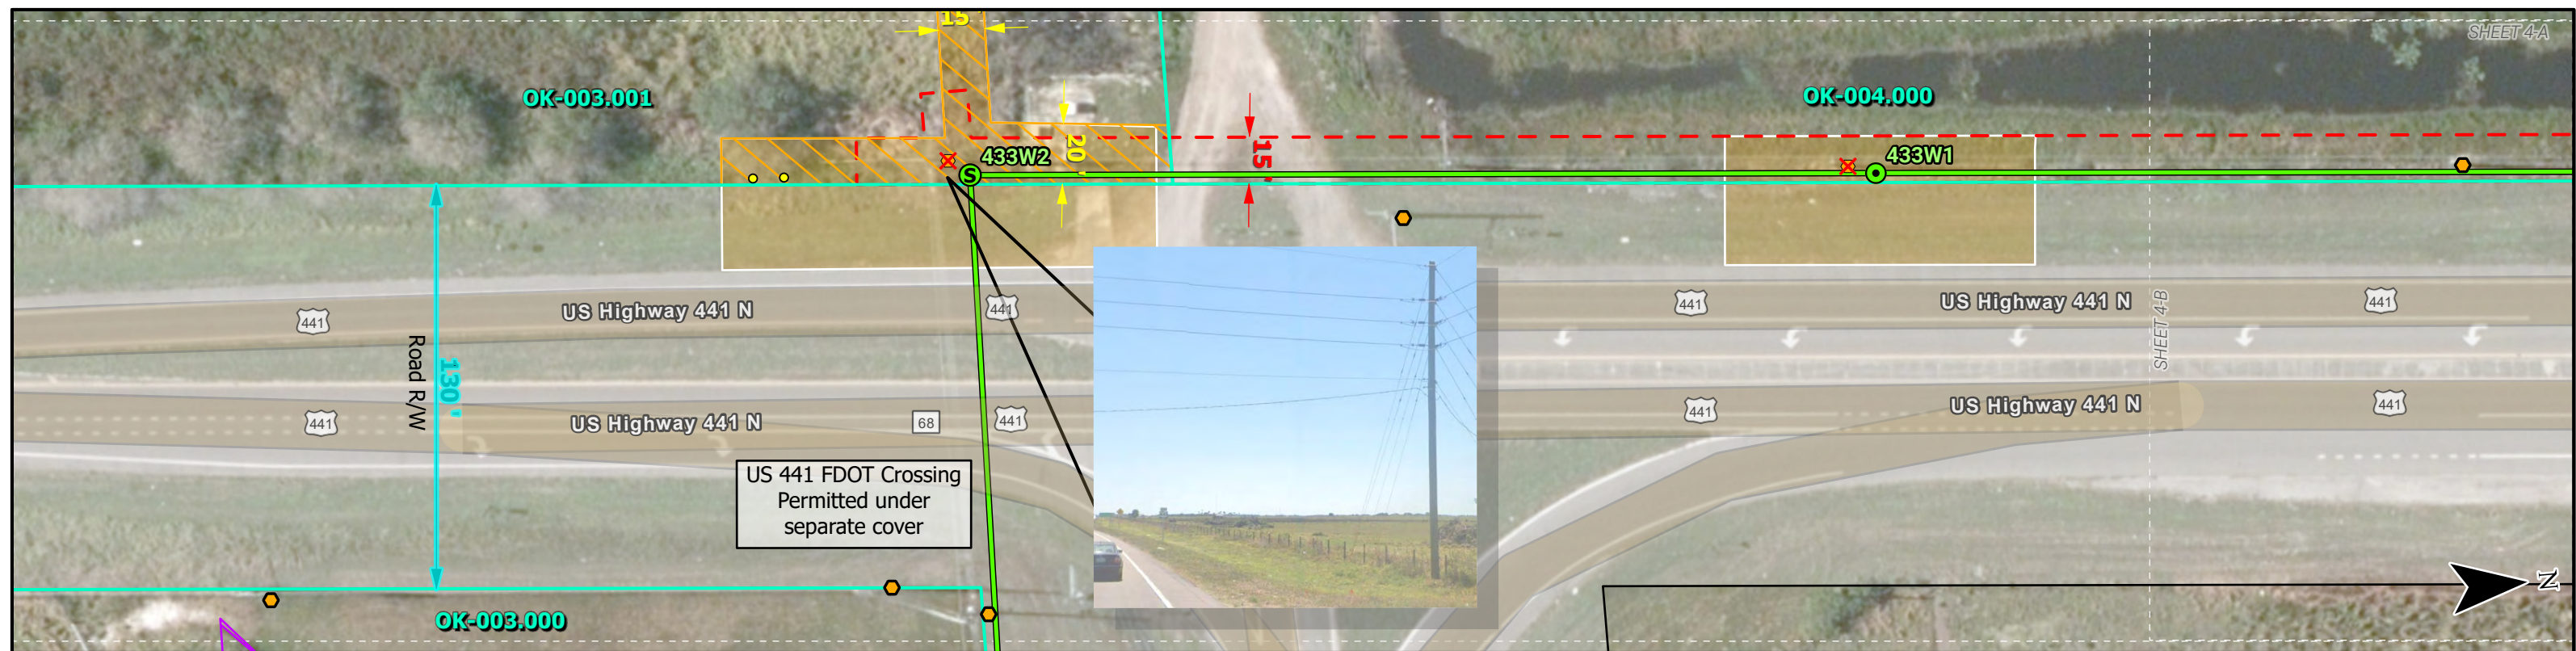

Legend:

Proposed Concrete Structure	Sweatt-Waterway Proposed Anchor Pile	FPL Distribution Pole to Remove	FPL Electric Easement	Upland Matting
Proposed Concrete Splice Structure	Existing Distribution Pole	Proposed Centerline	Glades Electric Easement	Wetland Matting
Proposed Steel Structure	GEC Proposed Distribution Pole	Existing Transmission Line to be Removed	Seminole Electric Easement	Upland Tree Clearing
Proposed Steel Splice Structure	GEC Existing Distribution Pole	Proposed FPL Easement	SFWMD Conservation Easement	Wetland Tree Clearing
GEC Structure to Remove	GEC Distribution Pole to Remove	Permanent Access Easement	Surface Water	Road ROW
		Wetland	Project Parcel	

0	50	100	A	10/24/2023	ISSUED FOR SUBMITTAL	CAC	BJW	BJW
Feet			REV	DATE	DESCRIPTION	BY	CKD	APP

FLORIDA POWER & LIGHT COMPANY

2H.T00000030424


SCALE: 1" = 50'
 DRAWN BY: CAC
 ENGINEER: BJW
 COUNTY: OKEECHOBEE
 SHEET 4 OF 7

DATE: 10/24/2023
 CHECKED BY: BJW
 SECTION: AS SHOWN

SWEATT-WHIDDEN 230kV LINE
 US 441 PARALLELISM EXHIBIT
 LOCATION MAP



T30424 PROPOSED SWEATT-WHIDDEN 230kV LINE (SR 70 PROJECT)
FDOT ROAD CROSSING PERMIT
US HIGHWAY 441 (SR.-15)
OKEECHOBEE COUNTY, FLORIDA

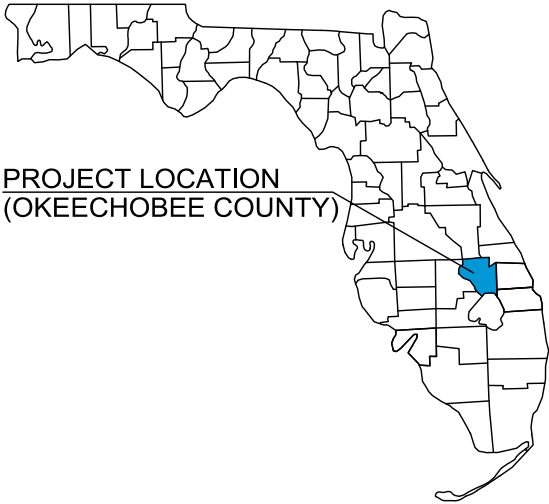


PICKETT AND ASSOCIATES, LLC
5010 WEST NASSAU STREET
TAMPA, FLORIDA 33607
C.A. NUMBER 31323
(813) 877-7770

NOTES:

1. COMPLIANCE WITH 2017 UAM, 2018 FLORIDA GREENBOOK & 2023-24 FDOT SPECIFICATIONS.
2. CONSTRUCTION AREA TO BE RESTORED TO EXISTING CONDITIONS AFTER CONSTRUCTION PERFORMED.
3. SOFT DIGS ARE SCHEDULED AS REQUIRED. LOCATE IDENTIFIED UNDERGROUND FACILITIES PRIOR TO CONSTRUCTION.
4. SEE ATTACHED STANDARD FDOT MOT INDEXES 102-601, 102-602, 102-603 & 102-625.
5. ALL POLE LOCATIONS WILL COMPLY WITH ADA REQUIREMENTS FOR WHEELCHAIR ACCESS.

0	09/27/2023	ISSUED FOR PERMIT	MDF	EW	BJW
REV	DATE	DESCRIPTION	BY	CKD	APP

TRANSMISSION ENGINEERING DEPARTMENT		2H.T00000030424	
		SWEATT-WHIDDEN 230kV LINE	
SCALE: 1"=2,000' DRAWN BY: MDF ENGINEER: BJW COUNTY: OKEECHOBEE SHEET 1 OF 3		DATE: 3/31/2023 CHECKED BY: EW SECTION: 32-37S-36E, 24-37S-35E, 13-37S-35E FILE NAME: FDOT Crossing Permit For HWY 441.dwg	
		SR-15 (US HWY 441) FDOT ROAD CROSSING PERMIT	

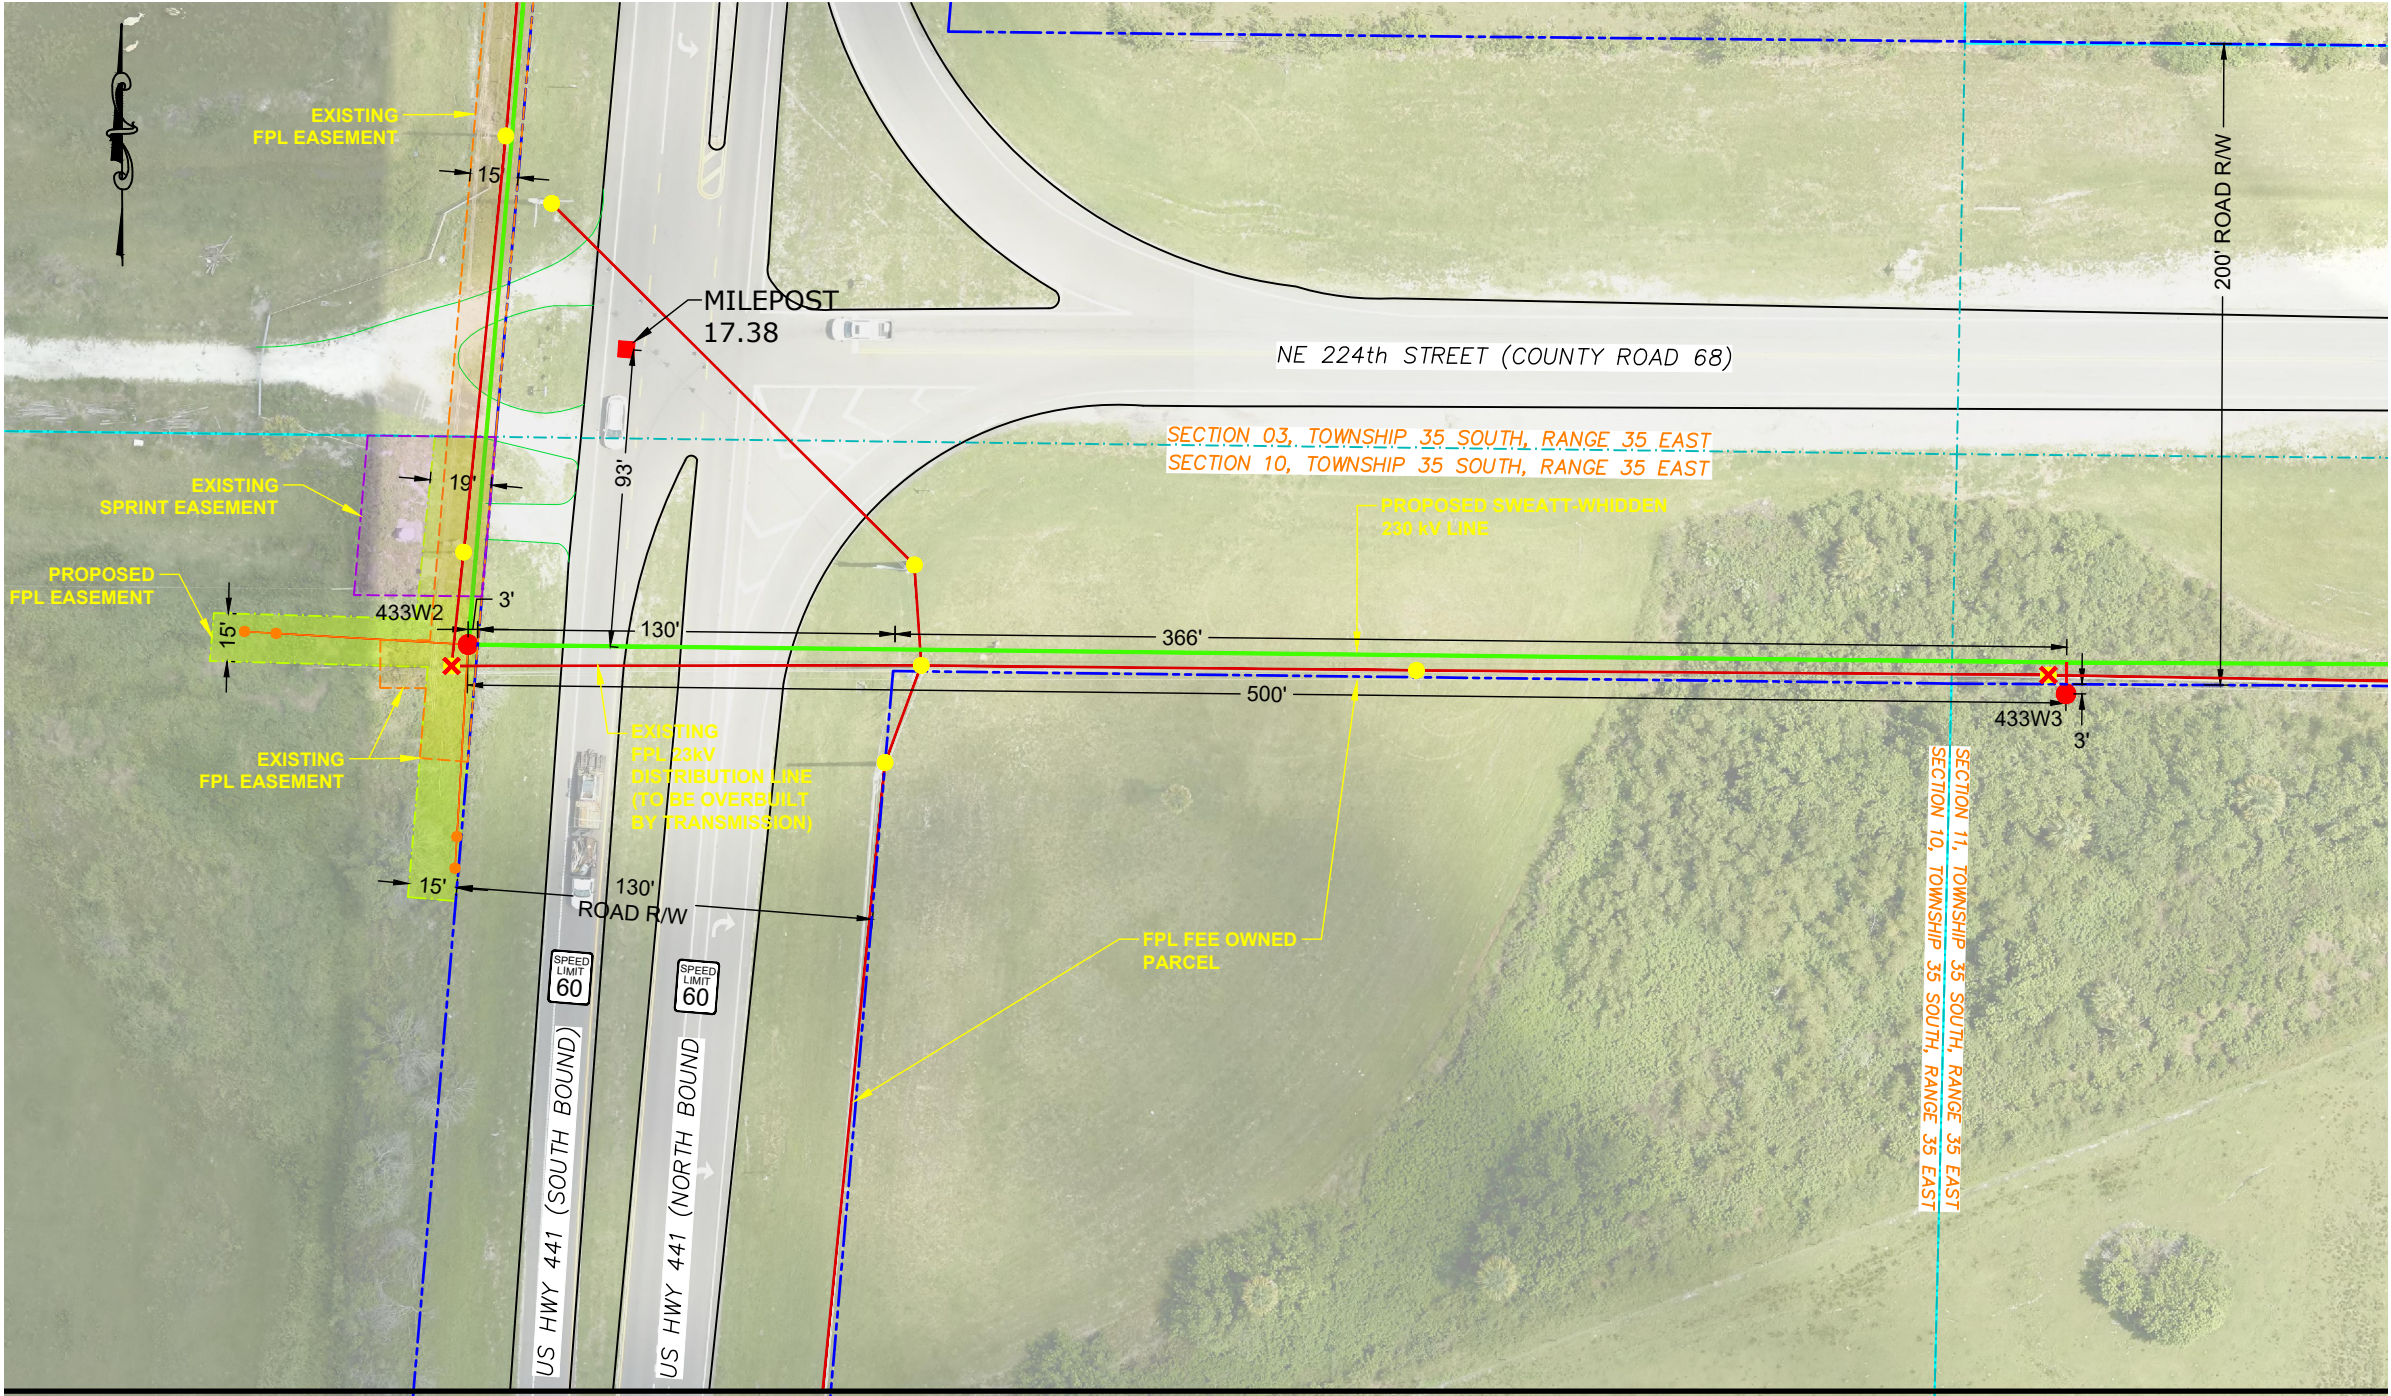

NOTES:

1. COMPLIANCE WITH 2017 UAM, 2018 FLORIDA GREENBOOK & 2023-24 FDOT SPECIFICATIONS.
2. CONSTRUCTION AREA TO BE RESTORED TO EXISTING CONDITIONS AFTER CONSTRUCTION PERFORMED.
3. SOFT DIGS ARE SCHEDULED AS REQUIRED. LOCATE IDENTIFIED UNDERGROUND FACILITIES PRIOR TO CONSTRUCTION.
4. SEE ATTACHED STANDARD FDOT MOT INDEXES 102-601, 102-602, 102-603 & 102-625.
5. ALL POLE LOCATIONS WILL COMPLY WITH ADA REQUIREMENTS FOR WHEELCHAIR ACCESS.

FDOT DISTRICT 1

LEGEND	
●	PROPOSED TRANSMISSION SPUN CONC. POLE
—	PROPOSED TRANSMISSION LINE
●	EXISTING DISTRIBUTION POLE (TO REMAIN)
✕	EXISTING DISTRIBUTION POLE (TO REMOVE)
—	EXISTING DISTRIBUTION LINE
●	PROPOSED ANCHOR PILE
—	PROPOSED GUY WIRE
—	RIGHT OF WAY LINE
—	PROPERTY LINE
—	EDGE OF PAVEMENT
---	FPL EXISTING EASEMENT
---	FPL PROPOSED EASEMENT
---	SPRINT EXISTING EASEMENT
---	SECTION, TOWNSHIP, RANGE

SR-15 (US HWY 441) CROSSING
PROPOSED SWEATT-WHIDDEN 230KV TRANSMISSION LINE
SEGMENT: SWEATT-BASINGER
PLAN VIEW

SR-15 (US HWY 441)		
SECTION: 10	TOWNSHIP: 35S	RANGE: 35E
SECTION: 11	TOWNSHIP: 35S	RANGE: 35E
AN APPLICATION TO INSTALL, OPERATE AND MAINTAIN 1-230KV TRANSMISSION LINE ALONG AND/OR ACROSS THE PROPERTY INDICATED ABOVE.		
REFERENCE DATA		CROSSING DATA
CROSSING OVER SR-15 (US 441)		APPROX. 130 FEET LOCATED WITHIN ROAD R/W

0	09/27/2023	ISSUED FOR PERMIT	MDF	EW	BJW
REV	DATE	DESCRIPTION	BY	CHKD	APP

TRANSMISSION ENGINEERING DEPARTMENT

2H.T00000030424

SWEATT-WHIDDEN 230KV LINE

SCALE: 1"=60'
DRAWN BY: MDF
ENGINEER: BJW
COUNTY: OKEECHOBEE
SHEET 2 OF 3


DATE: 3/31/2023
CHECKED BY: EW
SECTION: 10-35S-35E, 11-35S-35E
FILE NAME: FDOT Crossing Permit For HWY 441.dwg



SR-15 (US HWY 441)
FDOT ROAD CROSSING PERMIT



PICKETT AND ASSOCIATES, LLC
5010 WEST NASSAU STREET
TAMPA, FLORIDA 33607
C.A. NUMBER 31323
(813) 877-7770

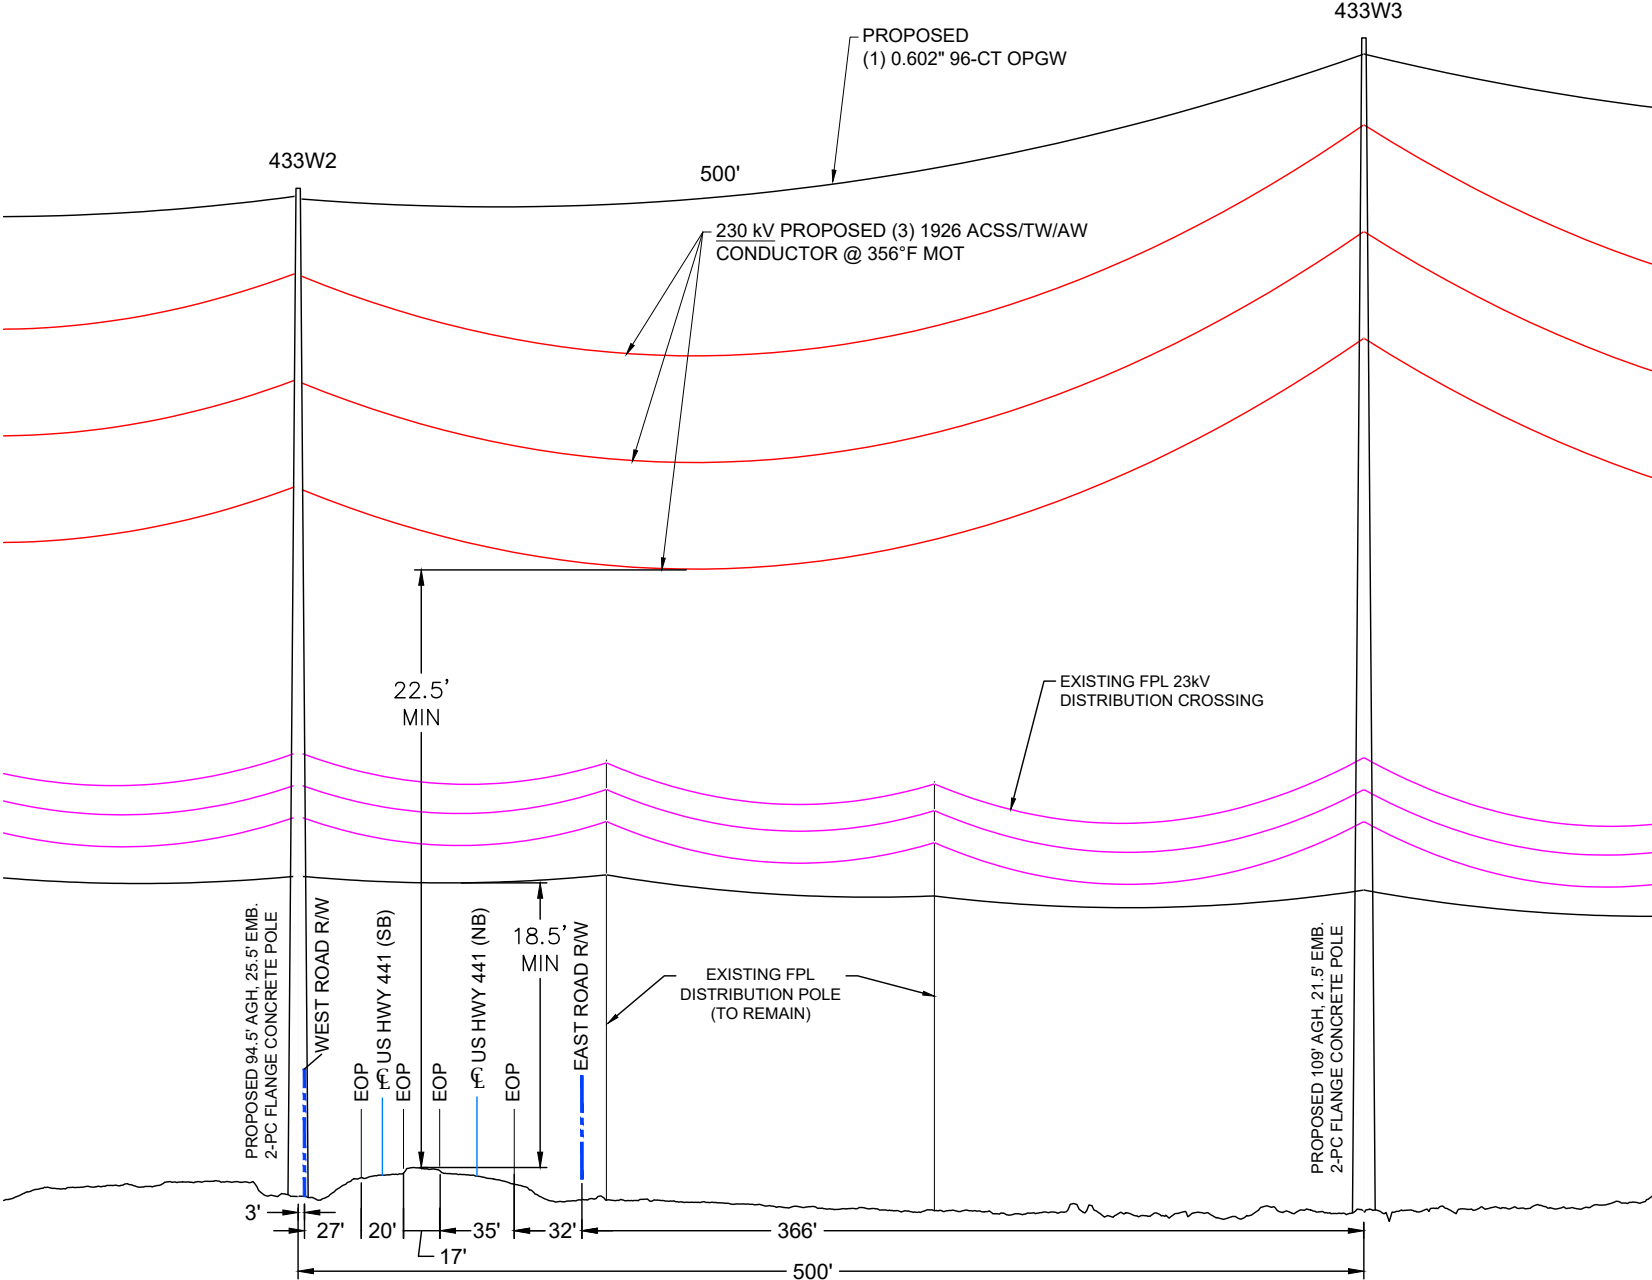

SR-15 (US HWY 441) CROSSING
PROPOSED SWEATT-WHIDDEN 230kV TRANSMISSION LINE
SEGMENT: SWEATT-BASINGER
PROFILE VIEW
LOOKING NORTH


NOTES:

1. COMPLIANCE WITH 2017 UAM, 2018 FLORIDA GREENBOOK & 2023-24 FDOT SPECIFICATIONS.
2. CONSTRUCTION AREA TO BE RESTORED TO EXISTING CONDITIONS AFTER CONSTRUCTION PERFORMED.
3. SOFT DIGS ARE SCHEDULED AS REQUIRED. LOCATE IDENTIFIED UNDERGROUND FACILITIES PRIOR TO CONSTRUCTION.
4. SEE ATTACHED STANDARD FDOT MOT INDEXES 102-601, 102-602, 102-603 & 102-625.
5. ALL POLE LOCATIONS WILL COMPLY WITH ADA REQUIREMENTS FOR WHEELCHAIR ACCESS.

SR-15 (US HWY 441)			009/27/2023ISSUED FOR PERMIT			MDF	EW	BJW
SECTION: 10	TOWNSHIP: 35S	RANGE: 35E	REV	DATE	DESCRIPTION	BY	CKD	APP
SECTION: 11	TOWNSHIP: 35S	RANGE: 35E	2H.T00000030424					
AN APPLICATION TO INSTALL, OPERATE AND MAINTAIN 1-230kV TRANSMISSION LINE ALONG AND/OR ACROSS THE PROPERTY INDICATED ABOVE.			TRANSMISSION ENGINEERING DEPARTMENT			SWEATT-WHIDDEN 230kV LINE		
REFERENCE DATA		CROSSING DATA	SCALE: N/A DRAWN BY: MDF ENGINEER: BJW COUNTY: OKEECHOBEE SHEET 3 OF 3			DATE: 3/31/2023 CHECKED BY: EW SECTION: 10-35S-35E, 11-35S-35E FILE NAME: FDOT Crossing Permit For HWY 441.dwg		
CROSSING OVER SR-15 (US HWY 441)		APPROX. 130 FEET LOCATED WITHIN ROAD R/W				SR-15 (US HWY 441) FDOT ROAD CROSSING PERMIT		



PICKETT AND ASSOCIATES, LLC
5010 WEST NASSAU STREET
TAMPA, FLORIDA 33607
C.A. NUMBER 31323
(813) 877-7770

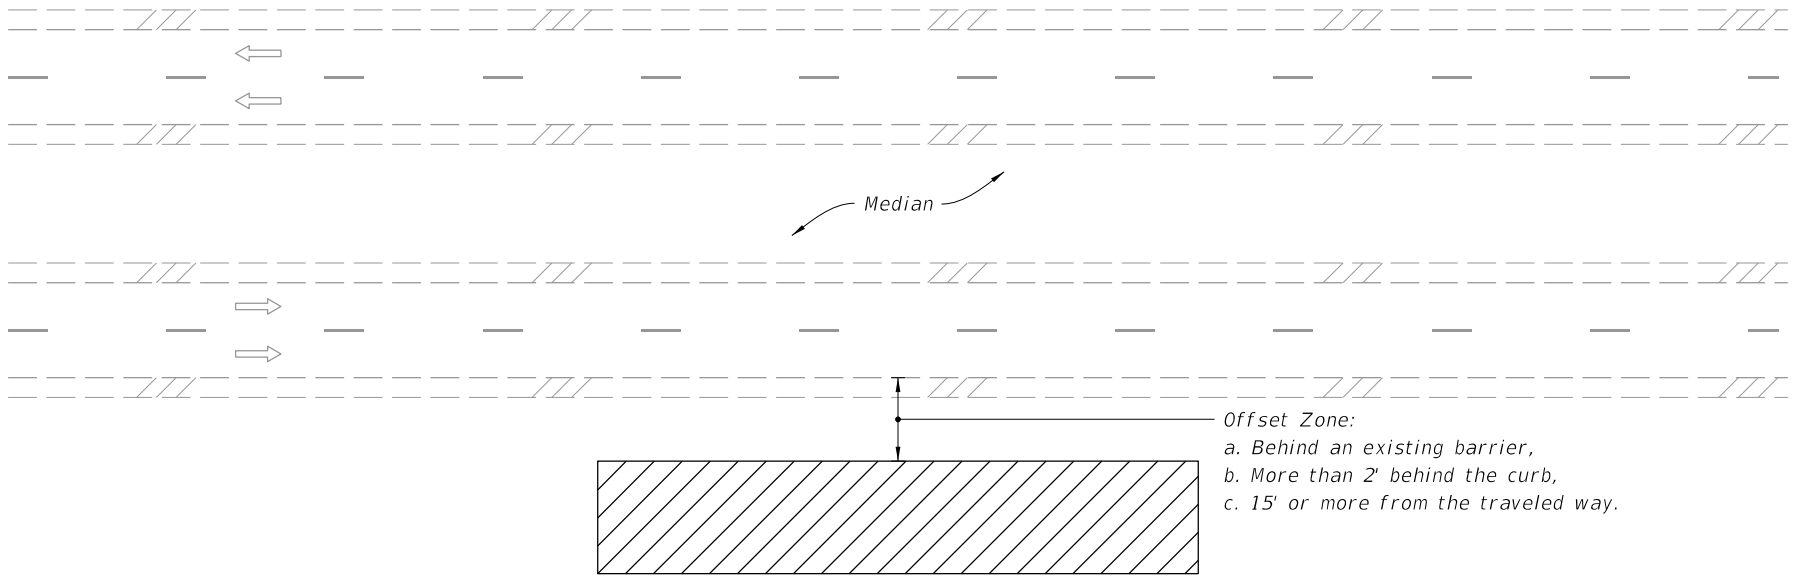

MULTILANE ROADWAY SHOWN, TWO-LANE ROADWAY SIMILAR

NOTES:

- 1. This Index applies to Two-Lane, Two-Way and Multilane Roadways, including Medians of divided roadways, with work beyond the shoulder.
- 2. Use Index 102-602 when the work operation (excluding establishing and terminating the work area) requires that two or more work vehicles cross the Offset Zone in any one hour period.
- 3. Use Index 102-660 when Work Area encroaches a Sidewalk.

SYMBOLS:

- Work Area
- Lane Identification and Direction of Traffic


LAST REVISION 11/01/20	REVISION	DESCRIPTION:	FY 2023-24 STANDARD PLANS	TWO-LANE AND MULTILANE ROADWAY, WORK BEYOND THE SHOULDER	INDEX 102-601	SHEET 1 of 1
------------------------------	----------	--------------	------------------------------	---	------------------	-----------------

NOTE:


1. This Index applies to Two-Lane, Two-Way and Multilane Roadways, including Medians of divided roadways, with work on the shoulder.
2. L = Taper Length
 X = Work Zone Sign Spacing
 B = Buffer Length
See Index 102-600 for "L", "X", "B", and channelizing device spacing values.
3. Where work activities are between 2' and 15' from the edge of traveled way, the Engineer may omit signs and channelizing devices for work operations 60 minutes or less.
4. When four or more work vehicles enter the through traffic lanes in a one hour period (excluding establishing and terminating the work area), use a flagger or lane closure to accommodate work vehicle ingress and egress.
5. For work less than 2' from the traveled way and work zone speed is greater than 45 MPH, use a lane closure.
6. The "Speeding Fines Doubled When Workers Present" signs (M0T-13-06) and "End Road Work" Signs (G20-2) along with the associated work zone sign spacing distances may be omitted when the work operation is in place for 24 hours or less.
7. Temporary pavement markings may be omitted when the work operation is in place for 3 days or less.
8. Omit "Shoulder Closed" signs (W21-5a) along with associated work zone sign spacing distances for work on the median.
9. When there is no paved shoulder, the "Worker" sign (W21-1) may be used instead of the "Shoulder Closed" sign (W21-5a).

SYMBOLS:

-  Work Area
-  Channelizing Device (See Index 102-600)
-  Work Zone Sign
-  Lane Identification and Direction of Traffic

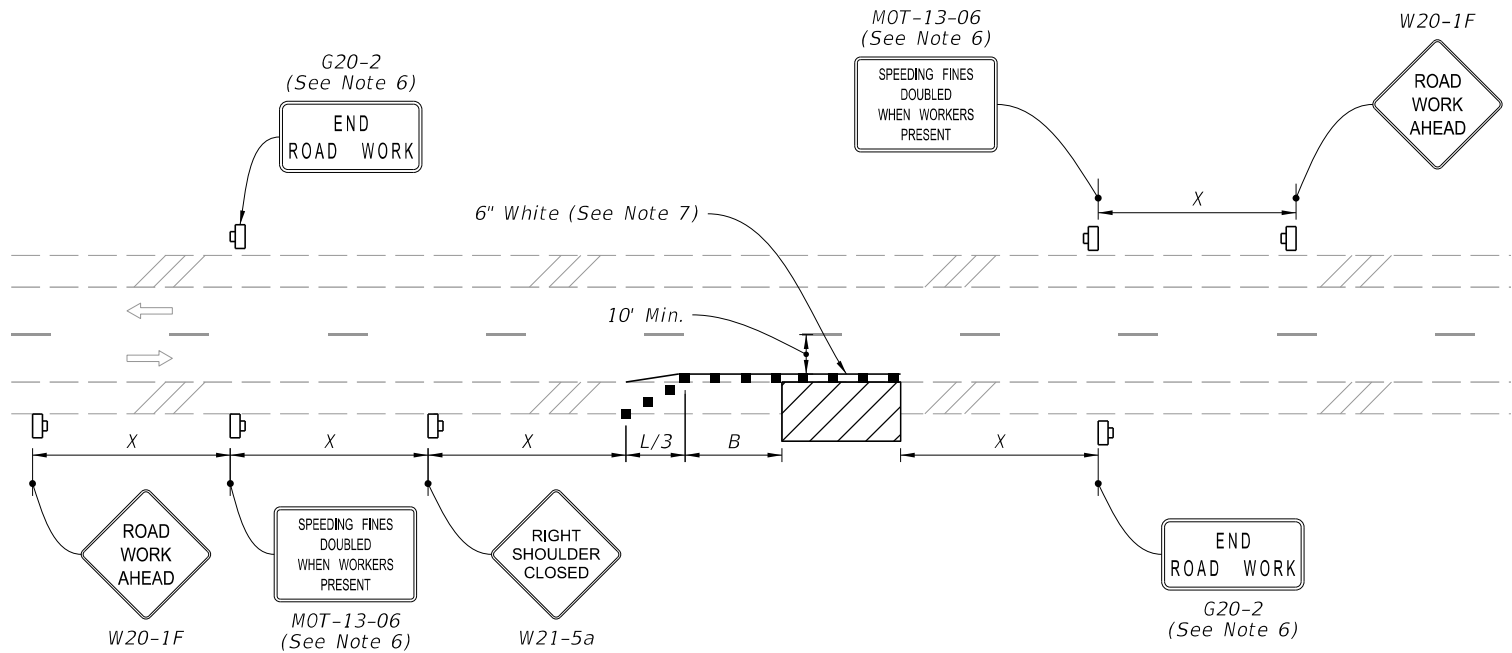


TWO-LANE ROADWAY
SHOULDER WORK LESS THAN 2' FROM THE TRAVELED WAY
WITH WORK ZONE SPEED OF 45 MPH OR LESS

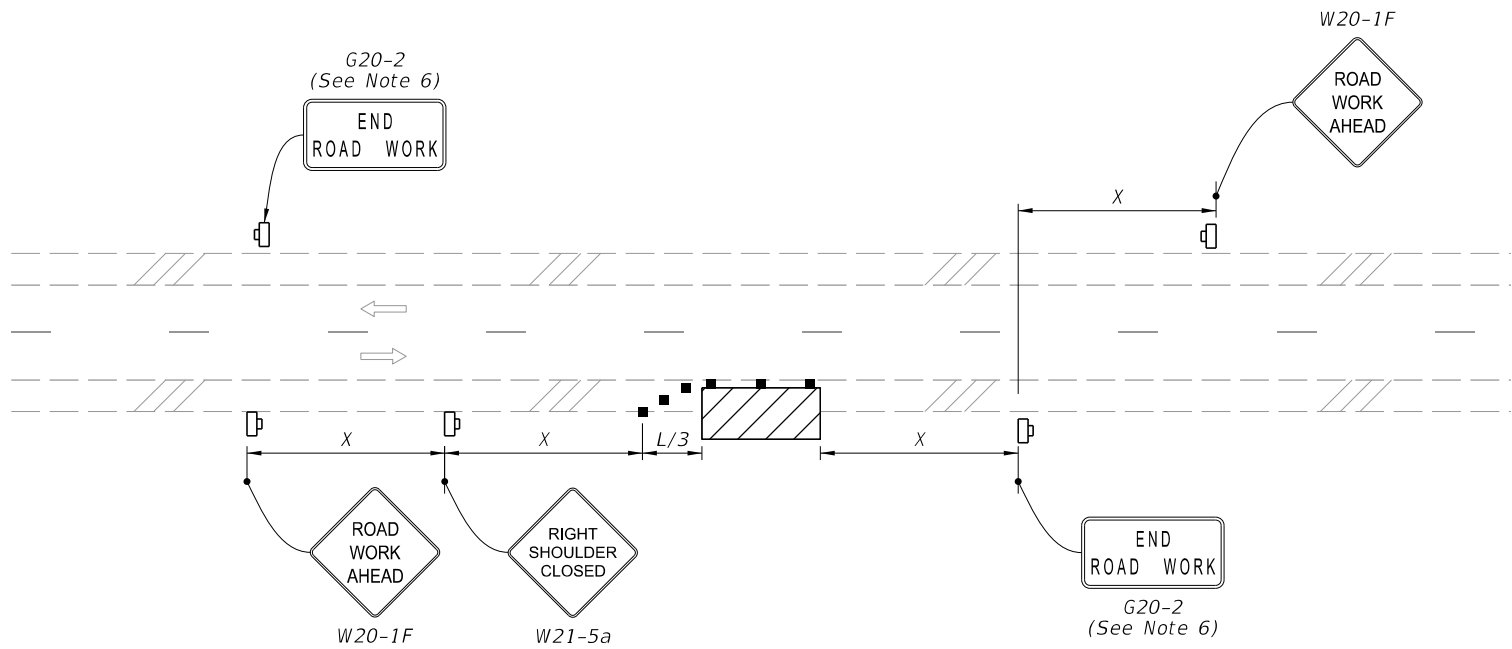


TWO-LANE ROADWAY
SHOULDER WORK BETWEEN 2' AND 15' FROM THE TRAVELED WAY

2/2/2023 10:33:38 AM

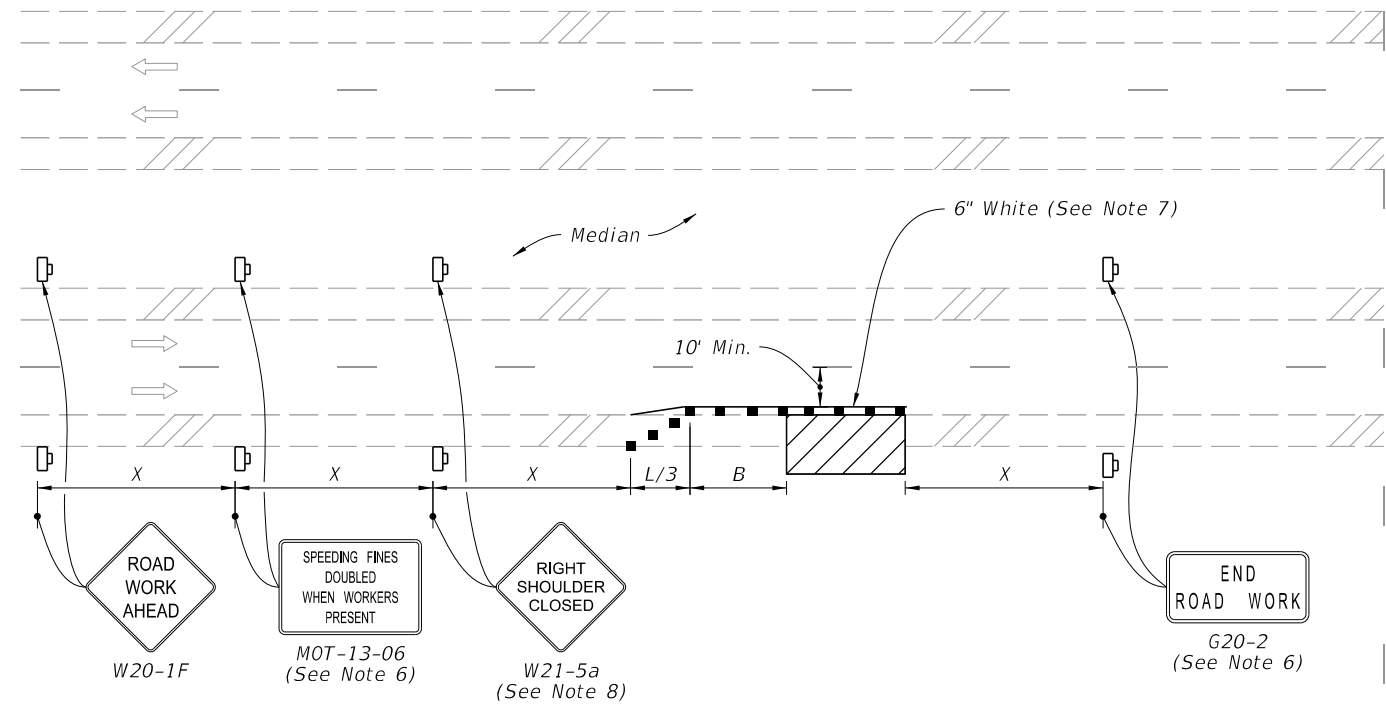

MULTILANE ROADWAY
SHOULDER WORK LESS THAN 2' FROM THE TRAVELED WAY
WITH WORK ZONE SPEED OF 45 MPH OR LESS

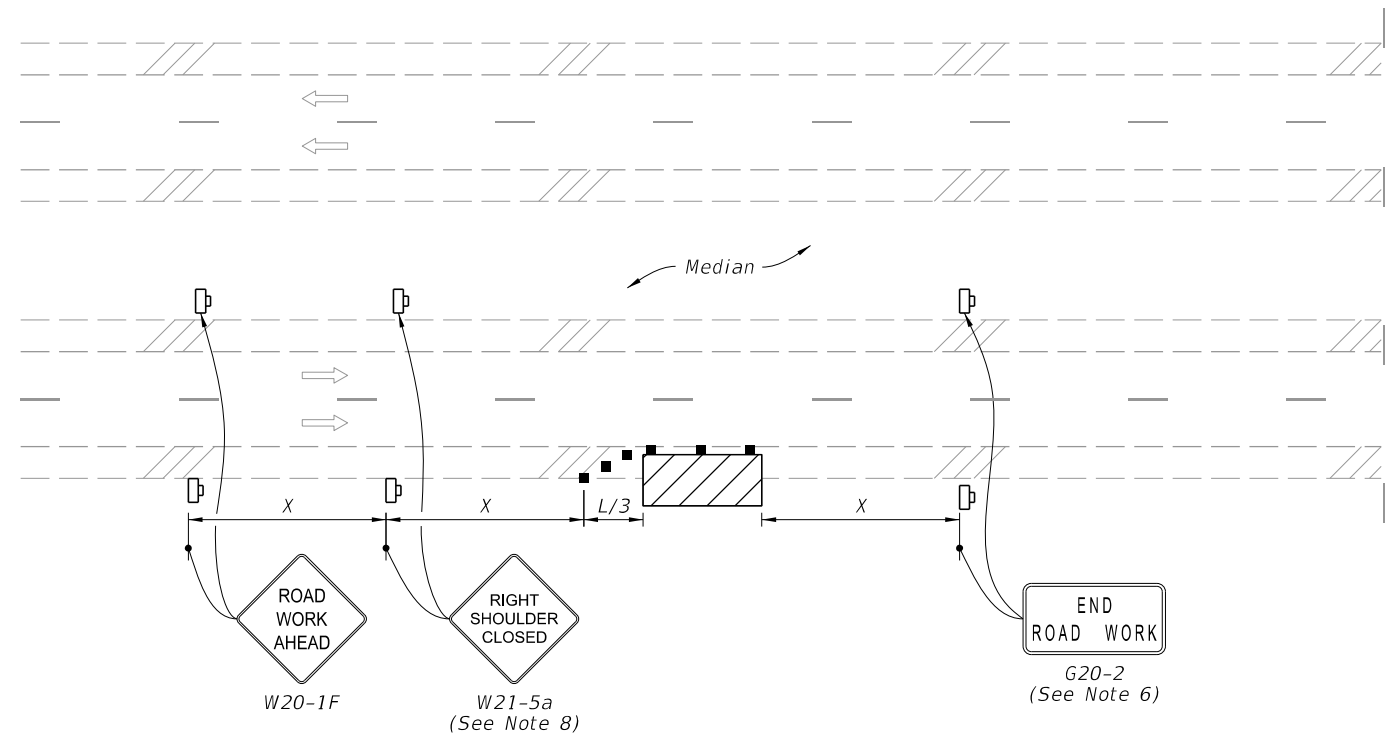

MULTILANE ROADWAY
SHOULDER WORK BETWEEN 2' AND 15' FROM THE TRAVELED WAY

SYMBOLS:

-  Work Area
-  Channelizing Device (See Index 102-600)
-  Work Zone Sign
-  Lane Identification and Direction of Traffic

LAST
REVISION
11/01/20

REVISION

DESCRIPTION:




FY 2023-24
STANDARD PLANS

TWO-LANE AND MULTILANE, WORK ON SHOULDER

INDEX
102-602

SHEET
2 of 2

10/6/2022 1:24:30 PM

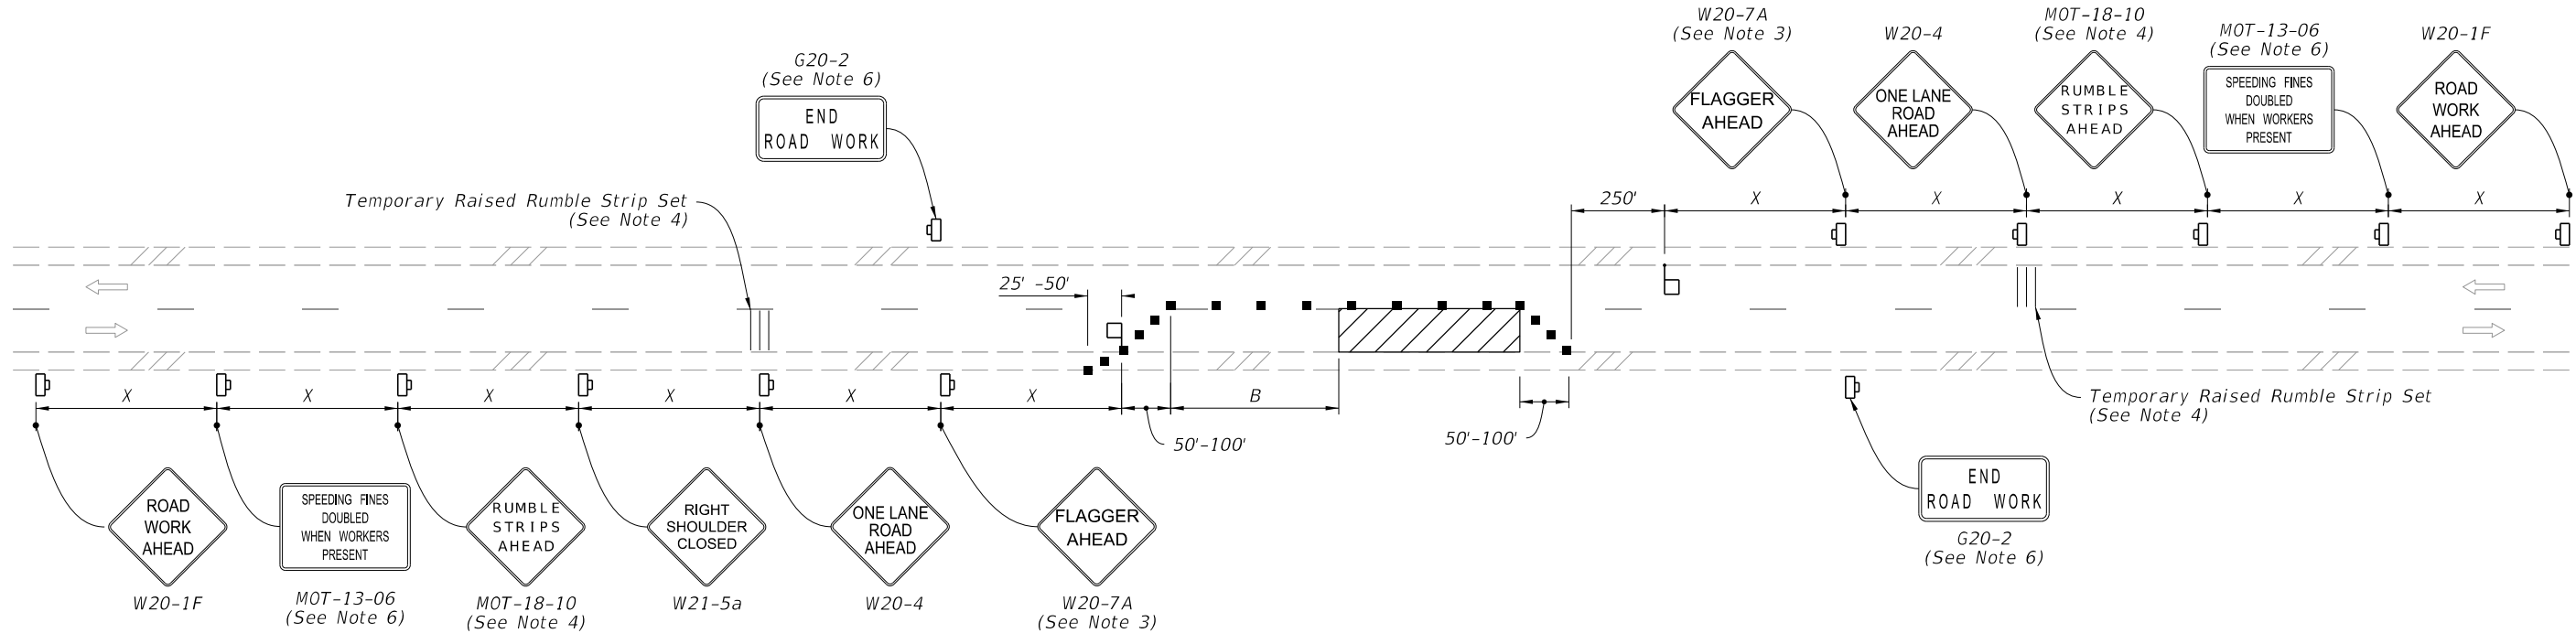


NOTES:

1. This Index applies to Two-Lane, Two-Way Roadways with work within the traveled way.
2. L = Taper Length
B = Buffer Length
X = Work Zone Sign Spacing
See Index 102-600 for "L", "B", "X" and channelizing device spacing values.
3. Optionally, use "Flagger Ahead" sign with symbol (W20-7) instead of "Flagger Ahead" sign with text (W20-7A).
4. Use temporary raised rumble strips when the existing posted speed is 55 mph or greater and the work duration is greater than 60 minutes. If temporary raised rumble strips are not used, omit "Rumble Strips Ahead" signs (MOT-18-10) and associated work zone sign spacing.
5. Additional one-way control may be provided by the following means:
 - a. Flag-carrying vehicle
 - b. Official vehicle
 - c. Pilot vehicles
 - d. Traffic signals
6. The "Speeding Fines Doubled When Workers Present" signs (MOT-13-06) and "End Road Work" signs (G20-2), along with associated work zone sign spacing, may be omitted when the work operation will be in place for 24 hours or less.
7. Automated Flagger Assistance Devices (AFADs) may be used in accordance with Specification Sections 102, 990 and the APL vendor drawings.
8. Railroad Crossings:
 - a. If an active railroad crossing is located closer to the Work Area than the queue length plus 300 feet, extend the Buffer Space as shown on Sheet 2.
 - b. If the queuing of vehicles across an active railroad crossing cannot be avoided, provide a uniformed traffic control officer or flagger at the highway-rail grade crossing to prevent vehicles from stopping within the highway-rail grade crossing, even if automatic train warning devices are in place.


When flaggers are the sole means of one-way control, the flaggers must be in sight of each other or in direct communication at all times.

SYMBOLS:

- Work Area
- Channelizing Device (See Index 102-600)
- Work Zone Sign
- Flagger
- Lane Identification and Direction of Traffic

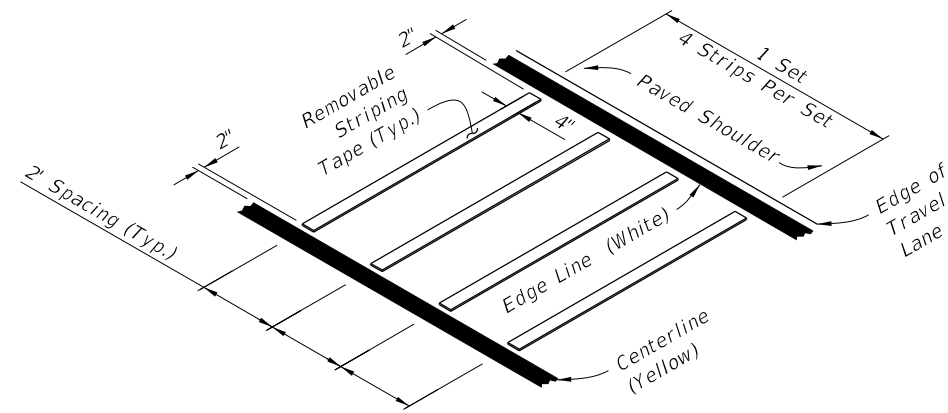



**OPTION - 1
REMOVABLE STRIPING TYPE**

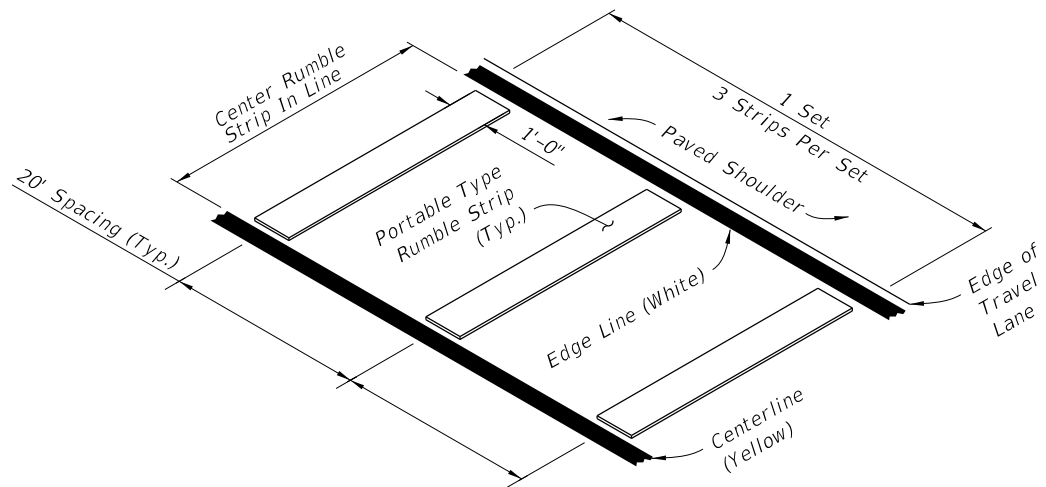

**OPTION - 2
PORTABLE TYPE**

RUMBLE STRIP SETS

LAST REVISION	DESCRIPTION:	FDOT	FY 2023-24 STANDARD PLANS	TWO-LANE, TWO-WAY WORK WITHIN THE TRAVEL WAY	INDEX	SHEET
11/01/21					102-603	1 of 2

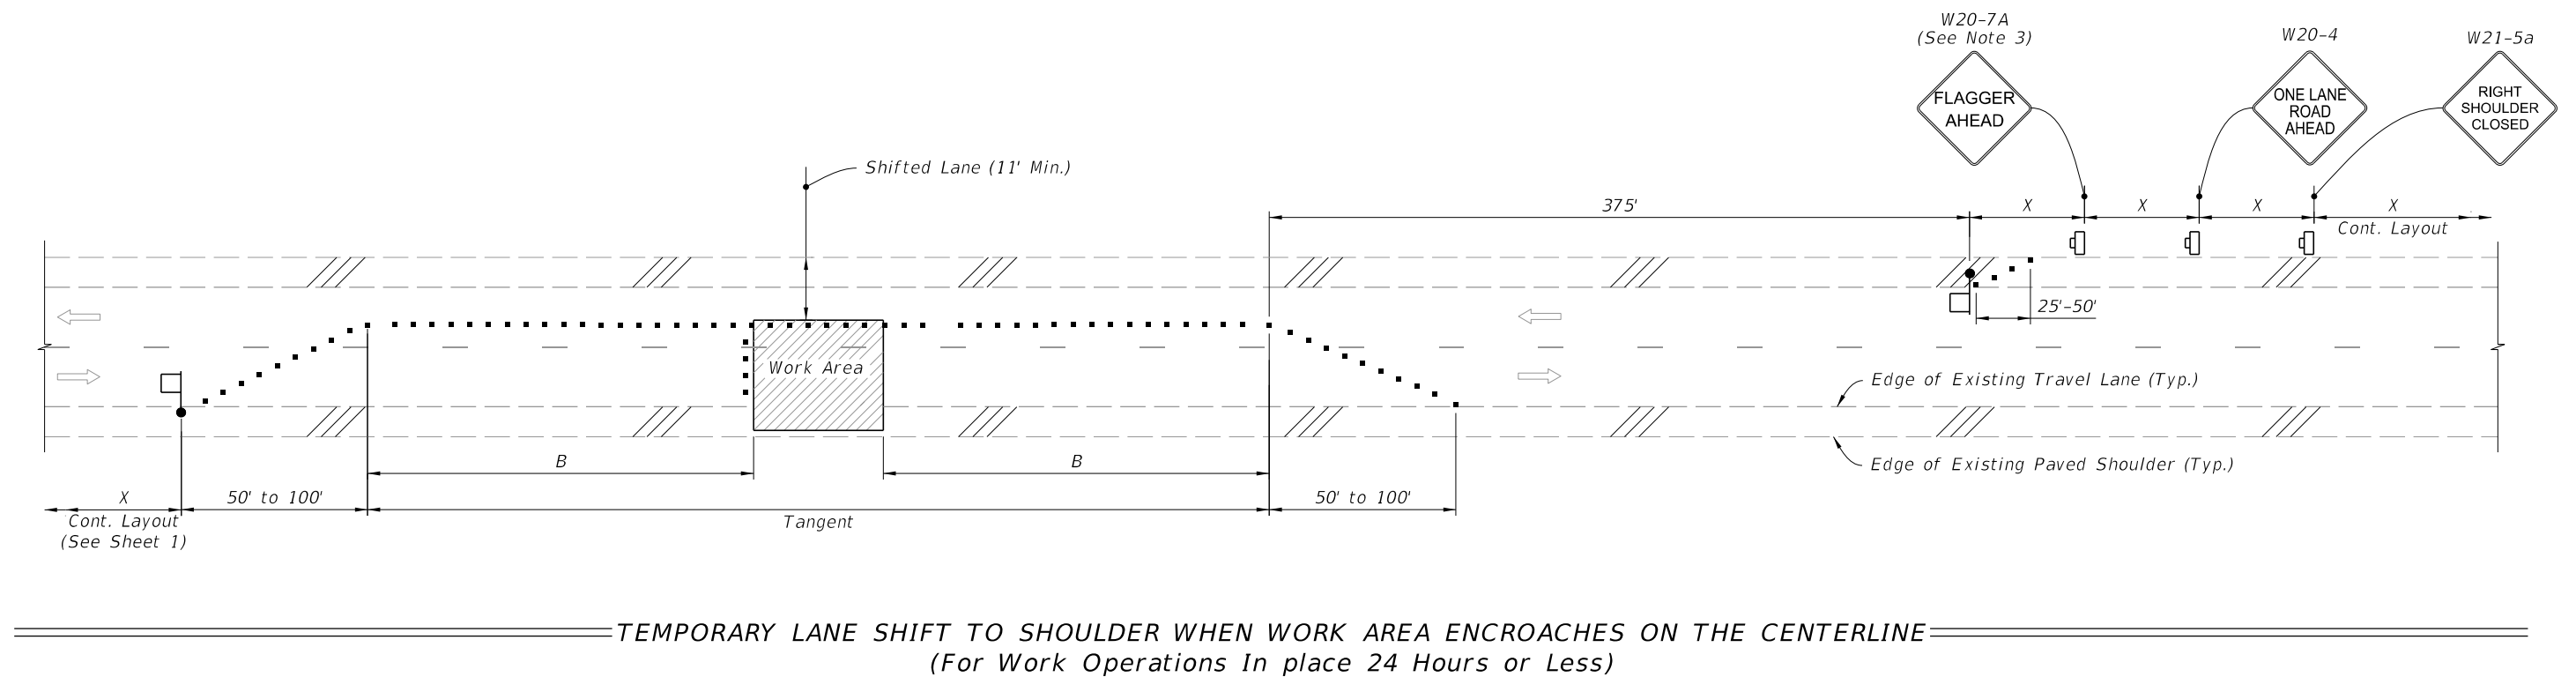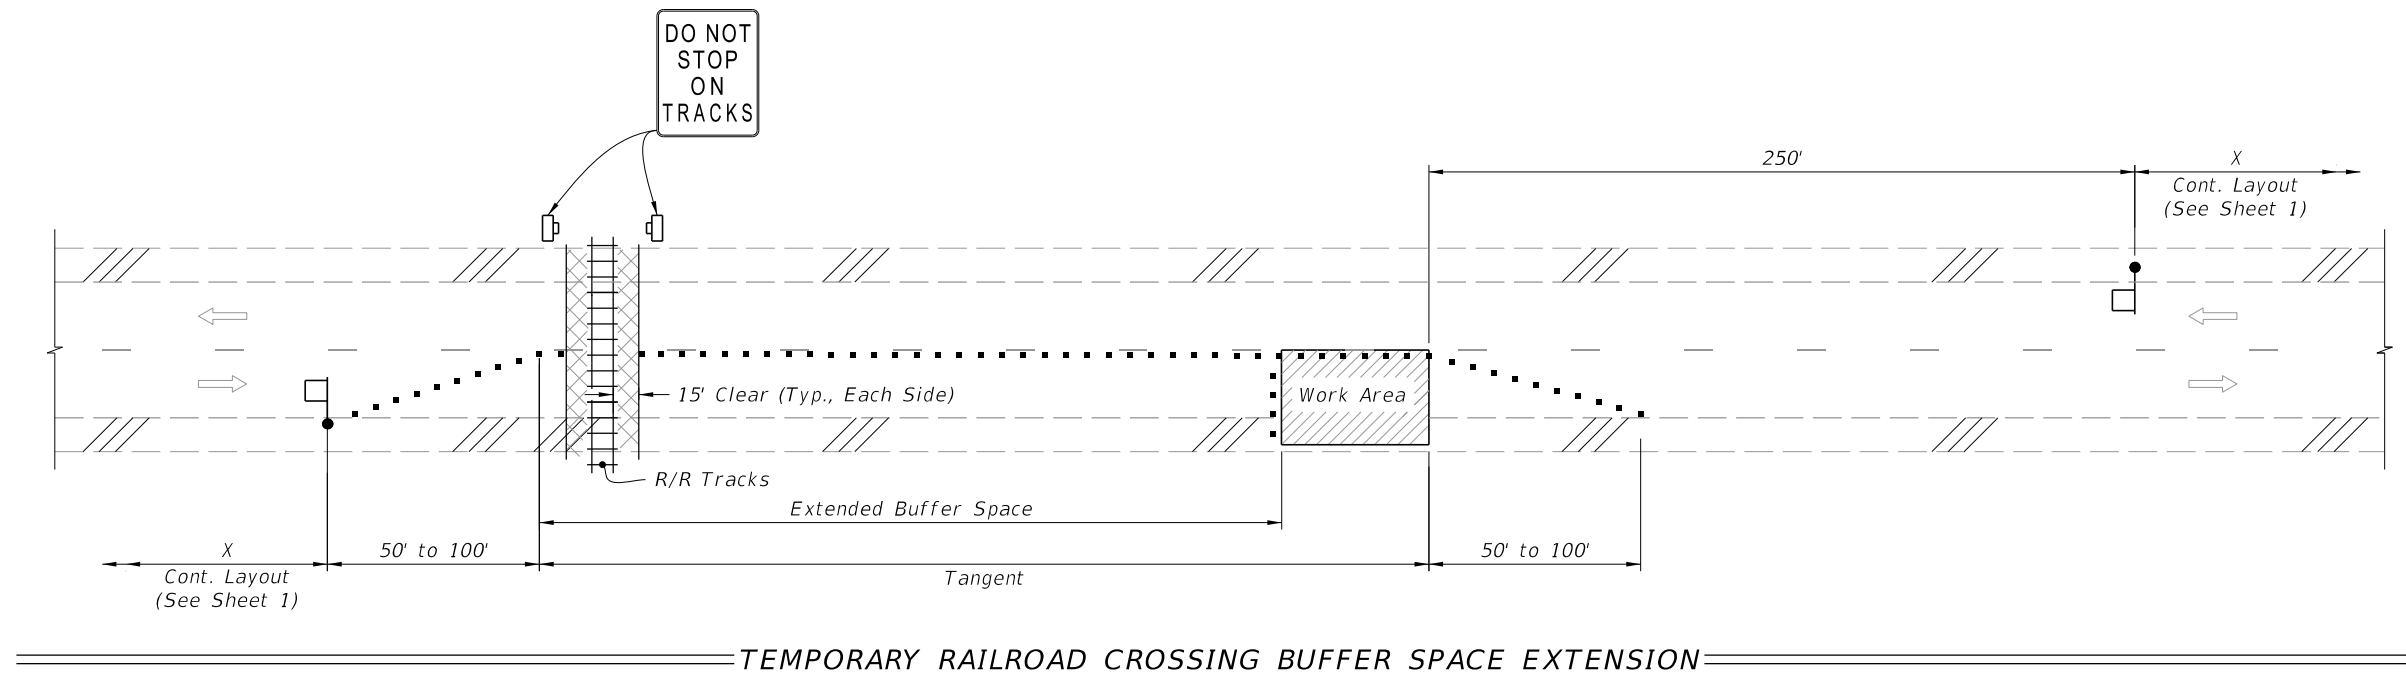

SYMBOLS:

- Work Area
- Channelizing Device (See Index 102-600)
- Work Zone Sign
- Flagger
- Lane Identification and Direction of Traffic

SPECIAL CONDITIONS

LAST REVISION 11/01/21	REVISION	DESCRIPTION:		FY 2023-24 STANDARD PLANS	TWO-LANE, TWO-WAY WORK WITHIN THE TRAVEL WAY	INDEX 102-603	SHEET 2 of 2
------------------------------	----------	--------------	--	------------------------------	---	------------------	-----------------



November 7, 2023

Cindy Mulkey
Deputy Director, Water Resource Management
Siting Coordination Office
Florida Department of Environmental Protection
2600 Blair Stone Road, MS 5500
Tallahassee, FL 32399-2400
Submitted electronically to: sco@floridadep.gov

Re: FPL Sweatt-Whidden 230 kV Transmission Line Project
TLSA Application No. TA22-19
Segment 1: Sweatt-Whidden 230kV Line | Sweatt-Basinger Section
FDOT Utility Permit

Dear Ms. Mulkey,

Pursuant to Section A. Condition XXI. and Section B. Condition II of the Conditions of Certification, Florida Power & Light Company (FPL) respectfully submits the enclosed FDOT Parallelism Permit for temporary works for construction along US HWY 441 and US HWY 98 as well as FDOT Road Crossing Permits for US HWY 441 for the construction of the new 230kV Transmission Line.

The enclosed applications will also be submitted directly to FDOT. FPL looks forward to continuing working with the Department and other agencies during the Post-Certification process. If you have additional questions, please do not hesitate to contact Shawn Hansen at (561) 904-3313 or Rafael Vides at (561) 904-3692.

Best Regards,

A handwritten signature in blue ink, appearing to read 'Gregg Hall', is written over a horizontal line.

Gregg Hall
Sr Manager Engineering -Siting, FPL T/S
gregg.a.hall@fpl.com

Enclosures:

Distribution List

FDOT Parallelism Along US HWY 441

FDOT Parallelism Along US HWY 98

FDOT Road Crossing Permit over US Hwy 441

FPL Sweatt-Whidden TLSA (TA22-19) Distribution List

Florida Department of Environmental Protection

Siting Coordination Office
2600 Blair Stone Road, MS 5500
Tallahassee, Florida 32399-2400
ann.seiler@floridadep.gov and
SCO@floridadep.gov

Office of General Counsel
3900 Commonwealth Blvd, MS 35
Tallahassee, Florida 32399-3000
Kelley.Corbari@FloridaDEP.gov

Florida Department of Transportation

Richard Shine, Esquire
605 Suwannee Street, MS-58
Tallahassee, Florida 32399
Richard.Shine2@dot.state.fl.us
April.Combs@dot.state.fl.us
monica.zhong@dot.state.fl.us