

Basin 12A NORTHWEST FLORIDA WATER MANAGEMENT DISTRICT-WELL LOG WOFFD-4658 LE NO. 45-19

WELL NUMBER LAT. 30°42'10" LONG. 85°40'54" COUNTY Washington DATE 1/25/80 PERMIT NO. 00011

LOCATION T 4N R 14W SEC 31 NW 1/4 of SE 1/4 of SW 1/4 MAP OR QUAD Poplar Head, Fla. 1950

OWNER James L. Watford ADDRESS Bonifay

WELL DEPTH 300 ft. CASED 280 ft. OPEN HOLE 20 ft. DEPTH LOGGED TOP 0 ft. BOTTOM 269 ft. TOTAL FT. LOGGED 807'

START OF LOG LSD 0 ft. TOP OF CASING TO LSD 1 ft.

CONDITION New DATE DRILLED 1/24/80 GROUTED Yes DATE 1/24/80 CAPPED No TYPE OF CASING PVC SIZE 4 1/2"

FLOWING No GPM N/A HEAD N/A IN. ELEVATION OF LSD TO MSL 75' Top of LS LSD MSL

FORMATION FORMATION TOP REFERENCE TO LSD MSL

AQUIFER Floridan WATER LEVEL REFERENCE TO LSD -34' MSL +41' ARTESIAN HEAD

TYPE OF LOG	INTERVAL TO	VERT. SCALE	HORZ. SCALE	LOGGED DIRECTION	SPEED FT./MIN.	REMARKS
Gamma w/ccl TC=	6 269	1" 20 ft.	0-100 cps	4 ft	25/min	
Caliper	5 269	1" 20'	2"-18"	4 ft	25/min	
Temp w/ccl	3 269	1" 20'		down	50/min	
Fluid Resistivity						
Electric						
Flow Meter						
Sampler						
Neutron						

USE OF WELL Anode Drainage Observation Oil-Gas Recharge Test Abandoned Withdrawal Waste Irrigation

QUALITY WATER SAMPLE Yes No Date N/A Depth(s) — pH — Salinity — Conductivity — Temp. —

DRILLER Ronnie Hughes TYPE OF RIG Mud Rotary PUMP INTAKE DEPTH 100' TYPE OF PUMP Sub DRILLER SAMPLES 10

Start of Log 12:00 Finished logging 1:30 Total time 1.5 hours Operator/observer Pentt


Well Accessibility good

Lithological Summary

REMARKS: Well telescoped 3" inside 4", well cased with 4" PVC to 255', telescoped inside this is 3" from 240' to 280', was not able to log the entire length of the well, obstructed at 269', logged no part of the open hole

THIS LOG FOR HYDROGEOLOGICAL DATA ONLY - NOT FOR CONTRACTUAL SATISFACTION

NWFWMD Form No

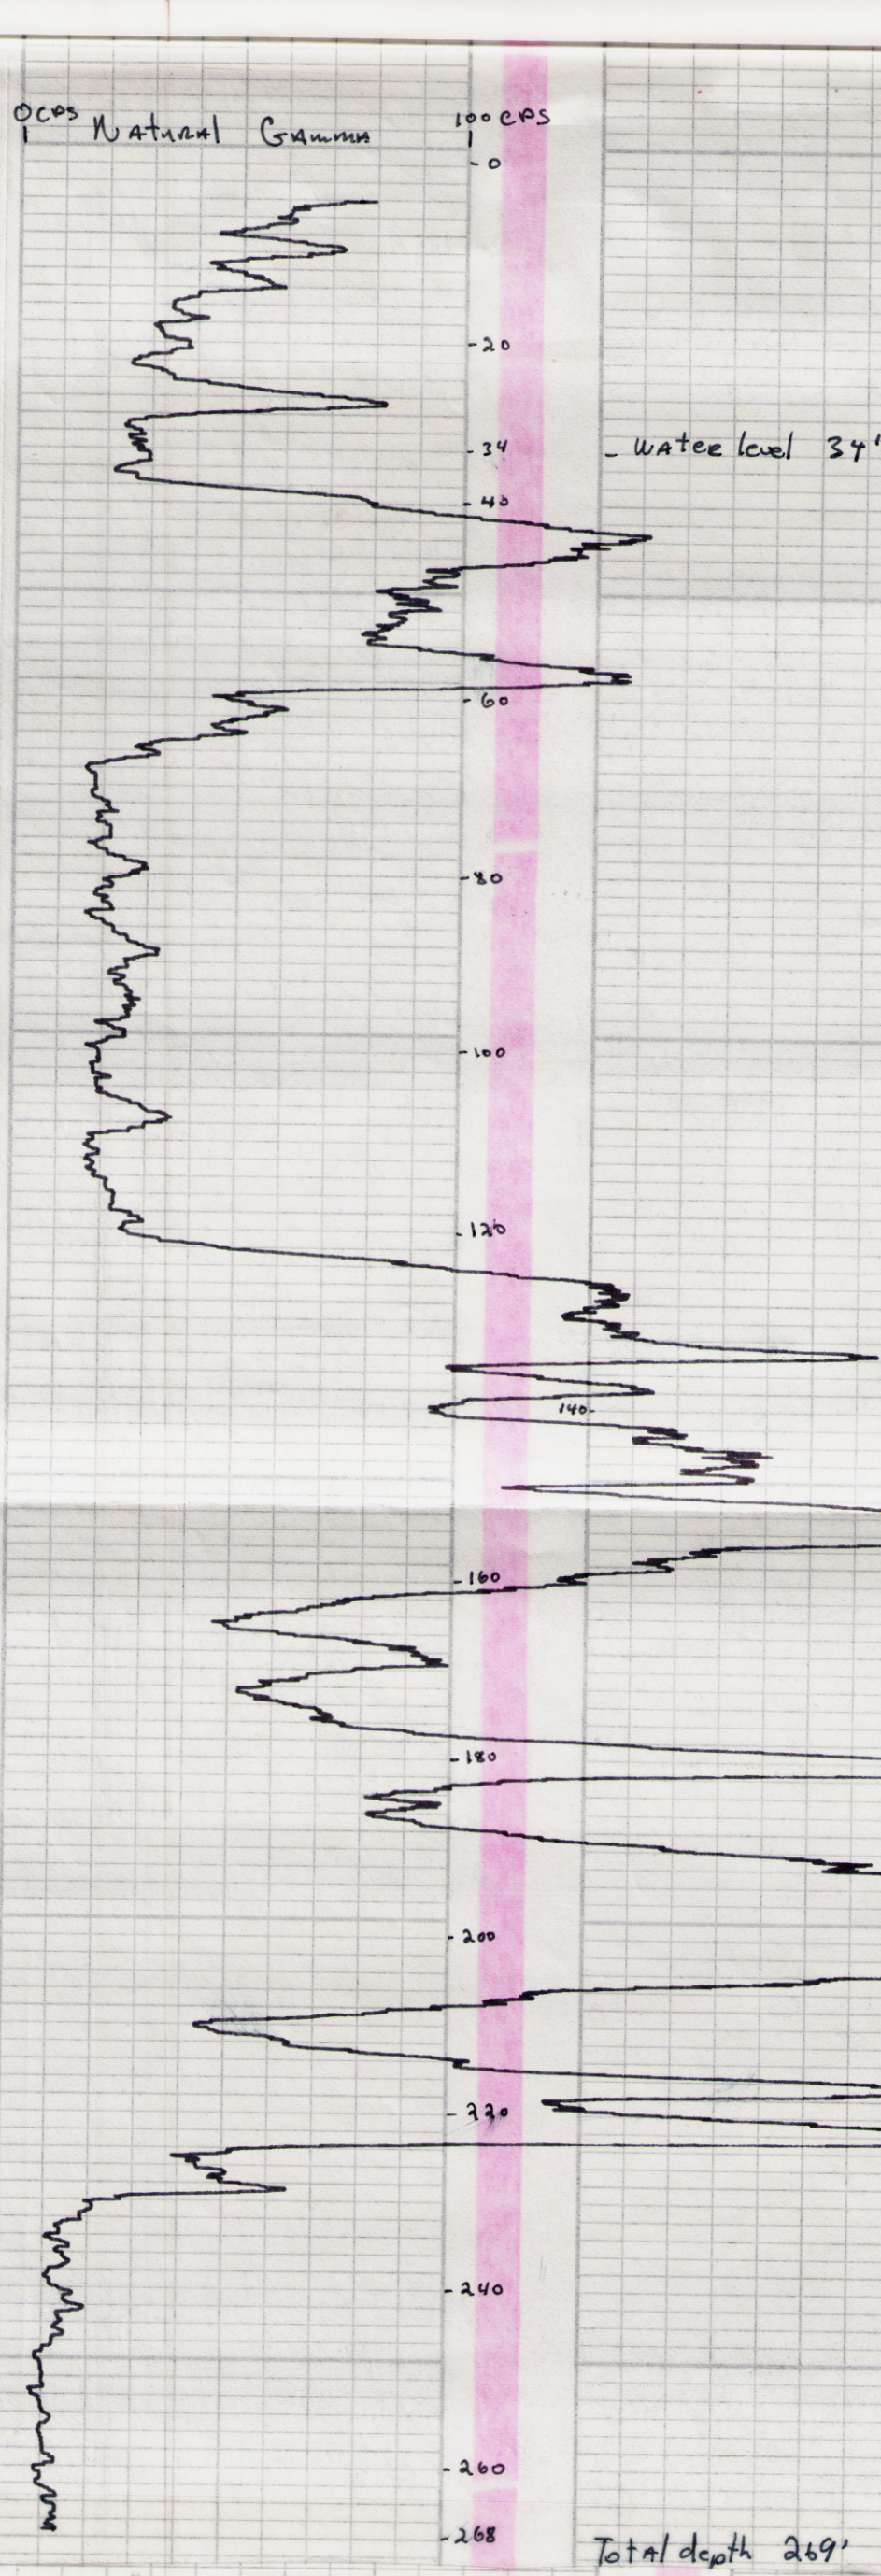

Temperature log

Water level 34'

Caliper log (Repeat Section)

Caliper log

Water level 34'

