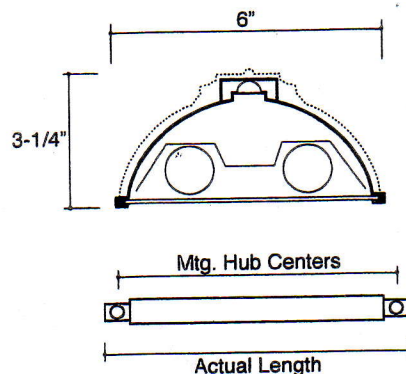
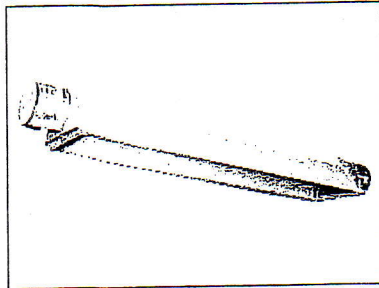


Nom. Length	Actual Length	Mtg. Hub Centers	Lamp
2'	29-1/2"	27"	14T5, 24T5HO, 17T8
3'	41"	38-1/2"	21T5, 39T5HO, 25T8
4'	53-1/8"	50-1/2"	28T5, 54T5HO, 32T8, 48T12HO, 48T12VHO
6'	77"	74-1/2"	39T5HO-6, 25T8-6, 72T12HO, 72T12VHO
8'	101"	98-1/2"	28T5-8, 54T5HO-8, 32T8-8, 96T12HO, 96T12VHO

Ordering Information

Sample: 41-154T5HO-120-PSN-UP

Series	Lamp	Wattage	Voltage	Ballast	Options
41	LED 2	10	120	N/A	1100 Lumens ea.
	1	14T5	UNV	T8 Options	QS ² Quick Ship 5 day (20 max) / 10 day (40 max)
	2	24T5HO	120	IS (Standard)	N Normal
		17T8	277	PS	UP Aiming Above Horizontal Plane
		21T5	347 ¹	HEIS	-20 -20°F Cold Start Ballast
		39T5HO	480 ¹	HEPS	EM ³ Emergency Battery Pack
		25T8		T5/T5HO	Ballast Factor
		28T5		PS (Standard)	N Normal
		54T5HO		HEPS ¹	
		32T8		T12HO/T12VHO	
		48T12HO*		RSN Normal B.F. / Remote	GLR Fusing
		48T12VHO		IS=Instant Start	
		39T5HO-6		PS=Program Start	
		25T8-6		HEIS=High Efficiency Instant Start	
		72T12HO*		HEPS=High Efficiency Program Start	
		72T12VHO		RSN=Electromagnetic Rapid Start	
		28T5-8			
		54T5HO-8			
		32T8-8			
		96T12HO*			
		96T12VHO			

Notes:

- Consult factory.
 - Highlighted options are available for Quick Ship. Order must be marked "QS". Order quantities of (1 - 20) will ship in 5 day; order quantities of (21 - 40) will ship in 10 days. Consult factory for Quick Ship policies.
 - Not available for all options, consult factory.
- * 277V remote weatherproof ballast is not available for this lamp option. Supplied with Indoor type ballast for remote mounting.

6ii↓↑6♥0

Specifications and dimensions are subject to change without notification. Specification sheets on our website supersede all other versions. 2013 Rev. D
Nulite reserves the right to bulk package any order.