

DRAFT

BASIN MANAGEMENT ACTION PLAN

**for the Implementation of the
Total Maximum Daily Load for Nutrient (Biology)
by the Florida Department of Environmental Protection
in the Upper Wakulla River and Wakulla Springs Basin**



prepared by the
Division of Environmental Assessment and Restoration
Water Quality Restoration Program
Florida Department of Environmental Protection
Tallahassee, FL 32399

in cooperation with the
Upper Wakulla River and Wakulla Springs Basin Technical Stakeholders

August 2014

ACKNOWLEDGMENTS

The Florida Department of Environmental Protection adopted the *Upper Wakulla River and Wakulla Springs Basin Management Action Plan* by Secretarial Order as part of its statewide watershed management approach to restore and protect Florida's water quality. The plan was developed in cooperation with the Upper Wakulla River and Wakulla Springs Basin stakeholders, identified below, with participation from affected local, regional, and state governmental interests; elected officials and citizens; and private interests.

FLORIDA DEPARTMENT OF ENVIRONMENTAL PROTECTION

Herschel T. Vinyard Jr., Secretary

Drew Bartlett, Deputy Secretary for Water Policy and Ecosystem Restoration

Tom Frick, Director of the Division of Environmental Assessment and Restoration

Trina Vielhauer, Deputy Director of the Division of Environmental Assessment and Restoration

Beth Alvi, Program Administrator for the Water Quality Restoration Program

Charles Gauthier, Environmental Administrator for the Watershed Planning and Coordination Section

UPPER WAKULLA RIVER AND WAKULLA SPRINGS BASIN PARTICIPANTS

- = Empty cell/no data

RESPONSIBLE STAKEHOLDERS	RESPONSIBLE AGENCIES	OTHER INTERESTED STAKEHOLDERS
Agricultural Producers	Florida Department of Agriculture and Consumer Services	1000 Friends of Florida
Leon County	Florida Department of Environmental Protection, including Wakulla Springs State Park	Citizens
Wakulla County	Florida Department of Health	Florida Department of Economic Opportunity
City of Tallahassee	Leon County Health Department	Friends of Wakulla Springs
Florida Department of Transportation District 3	Northwest Florida Water Management District	Wakulla Springs Alliance
Gadsden County	Wakulla County Health Department	-
Jefferson County	-	-
City of Gretna	-	-
City of Midway	-	-
City of Quincy	-	-
Town of Havana	-	-
Federal Correctional Institution, Tallahassee	-	-
Florida Agricultural and Mechanical University	-	-
Florida State University	-	-
Tallahassee Community College	-	-
Talquin Electric Cooperative	-	-

For additional information on Total Maximum Daily Loads and the watershed management approach in the Upper Wakulla River and Wakulla Springs Basin, contact:

Stephen Cioccia, Basin Coordinator
Florida Department of Environmental Protection
Water Quality Restoration Program, Watershed Planning and Coordination Section
2600 Blair Stone Road, Mail Station 3565
Tallahassee, FL 32399-2400
Email: Stephen.Cioccia@dep.state.fl.us
Phone: (850) 245–8513

TABLE OF CONTENTS

LIST OF ACRONYMS AND ABBREVIATIONS	VII
SUMMARY	VIII
CHAPTER 1 : CONTEXT, PURPOSE, AND SCOPE OF THE PLAN	1
1.1 Water Quality Standards and TMDLs	1
1.2 TMDL Implementation	3
1.3 Upper Wakulla River and Wakulla Springs BMAP	4
1.3.1 Plan Purpose and Scope	4
1.3.2 Stakeholder Involvement	7
1.3.3 BMAP Approach	9
1.3.4 Onsite Sewage Treatment and Disposal Systems (OSTDS) Initiative	10
1.3.5 Pollutant Reduction and Discharge Allocations.....	12
1.3.6 Upper Wakulla River TMDL.....	13
1.4 Assumptions and Considerations Regarding TMDL Implementation	14
1.4.1 Assumptions	14
1.4.2 Considerations	15
1.5 Future Growth in the Watershed	18
CHAPTER 2 : UPPER WAKULLA RIVER AND WAKULLA SPRINGS BASIN SETTING	21
2.1 Land Use Coverage	21
2.2 Hydrology	24
2.3 Water Quality and Biological Community Trends.....	26
2.4 The Impact of Nitrate on Water Quality and the Biological Community	31
CHAPTER 3 : POLLUTANT SOURCES AND ANTICIPATED OUTCOMES.....	33
3.1 Summary of Sources in the Basin.....	33
3.1.1 WWTFs.....	33
3.1.2 OSTDS.....	35
3.1.3 Residential Fertilizer	37
3.1.4 Agricultural Fertilizer and Livestock.....	37
3.1.5 Stormwater	38
3.2 Anticipated Outcomes of BMAP Implementation	41
CHAPTER 4 : MANAGEMENT STRATEGIES WITHIN THE PFAS.....	42
4.1 Sufficiency of Effort Evaluation	42
4.1.1 WWTFs Sufficiency	43
4.1.2 OSTDS Sufficiency.....	47
4.1.3 Residential Fertilizer Sufficiency.....	48
4.1.4 Agricultural Fertilizer and Livestock Sufficiency	49
4.1.5 Stormwater Sufficiency	50
4.1.6 Other Strategies	51
4.2 Stakeholder Management Strategies Tables	52
CHAPTER 5 : MANAGEMENT STRATEGIES OUTSIDE OF THE PFAS.....	63

5.1	Agriculture.....	63
5.2	City of Gretna Management Strategies	65
5.3	City of Quincy Management Strategies	65
5.4	FAMU Management Strategies	65
5.5	Federal Correctional Institution, Tallahassee Management Strategies.....	66
5.6	FSU Management Strategies.....	66
5.7	Gadsden County Management Strategies	67
5.8	Talquin Electric Cooperative Management Strategies	67
5.9	TCC Management Strategies.....	69
5.10	Town of Havana Management Strategies.....	69
CHAPTER 6 : ASSESSING PROGRESS AND MAKING CHANGES		70
6.1	Tracking Implementation	70
6.2	Adaptive Management Measures	71
6.3	Water Quality Monitoring	72
6.3.1	Monitoring Objectives	72
6.3.2	Water Quality Monitoring Parameters, Frequency, and Network	72
6.3.3	Biological Monitoring.....	76
6.3.4	Data Management and Assessment	76
6.3.5	Quality Assurance/Quality Control	77
6.4	Research Studies	77
6.5	Commitment to Plan Implementation	78
APPENDICES.....		79
Appendix A: TMDL Basin Rotation Schedule.....		80
Appendix B: Rule 62-304(2), F.A.C., the Upper Wakulla River TMDL		81
Appendix C: City of Tallahassee Stormwater Treatment Projects in the Upper Wakulla River and Wakulla Springs Basin		82
Appendix D: Potential Funding Sources		85
Appendix E: Bibliography of Key References and Websites		89

LIST OF FIGURES

Figure ES-1: Upper Wakulla River and Wakulla Springs Basin.....	ix
Figure ES-2: Water Quality Trends in the Wakulla River and Wakulla Spring Vent	xi
Figure 1: Upper Wakulla River and Wakulla Springs Basin	6
Figure 2: Protection Measures for Future Growth.....	20
Figure 3: 2004 Land Cover in the Upper Wakulla River and Wakulla Springs Basin	23
Figure 4: Nitrate-Nitrite Water Quality Trends in the Wakulla River and Wakulla Spring Vent	27
Figure 5: Nitrate-Nitrite Water Quality Trends in the Wakulla Springs Tunnels	27
Figure 6: Locations of the Main Wakulla Springs Tunnels.....	28
Figure 7: Relative Nitrate Contributions in the Main Wakulla Springs Tunnels	29

Figure 8: Schematic of Sources, Reservoirs, and Pathways of Nitrogen in the Unconfined Portion of the Wakulla Springshed	32
Figure 9: Domestic Wastewater Treatment Plants and Facilities in the PFAs.....	34
Figure 10: Current Locations of OSTDS in the PFAs.....	36
Figure 11: 2009 Agricultural Lands in the Upper Wakulla River and Wakulla Springs BMAP	38
Figure 12: Agricultural Lands Enrolled in BMPs in the PFAs, as of June 2013.....	62
Figure 13: Agricultural Lands Enrolled in BMPs Outside of the PFAs, as of June 2013	64
Figure 14: Monitoring Network for the Upper Wakulla River and Wakulla Springs	75
Figure C-1: Location of the City of Tallahassee’s Stormwater Treatment Projects.....	84

LIST OF TABLES

Table ES-1: Upper Wakulla River TMDL	x
Table 1: Designated Use Attainment Categories for Florida Surface Waters	2
Table 2: Phases of the Watershed Management Cycle.....	3
Table 3: Upper Wakulla River TMDL	14
Table 4: Leon County Strategies to Address Sources in Georgia	17
Table 5: 2009 Land Cover in the Upper Wakulla River and Wakulla Springs Basin	21
Table 6: 2009 Land Cover in PFA1.....	21
Table 7: 2009 Land Cover in PFA2.....	22
Table 8: 2009 Land Cover in the Basin Outside of the PFAs.....	22
Table 9: Wastewater Treatment Facilities in PFA1	33
Table 10: Entities in the Upper Wakulla River and Wakulla Springs BMAP Basin Designated as MS4s	39
Table 11: Florida Department of Environmental Protection Management Strategies	53
Table 12: FDOT District 3 Management Strategies.....	53
Table 13: Wakulla Springs State Park Management Strategies.....	53
Table 14: City of Tallahassee Management Strategies	55
Table 15: Leon County Management Strategies.....	56
Table 16: Wakulla County Management Strategies	58
Table 17: Agricultural Land Uses and BMP Enrollment in the PFAs as of June 30, 2013	61
Table 18: Agricultural Land Use Acreage BMAP Enrollment Outside of the PFAs as of June 30, 2013	63
Table 19: City of Gretna Management Strategies Outside of the PFAs.....	65
Table 20: City of Quincy Management Strategies Outside of the PFAs.....	65
Table 21: FAMU Management Strategies Outside of the PFAs.....	66
Table 22: Federal Correctional Institution, Tallahassee Management Strategies Outside of the PFAs	66
Table 23: FSU Management Strategies Outside of the PFAs.....	67
Table 24: Gadsden County Management Strategies Outside of the PFAs	67

<i>Table 25: Talquin Electric Cooperative Management Strategies Outside of the PFAs</i>	<i>68</i>
<i>Table 26: TCC Management Strategies Outside of the PFAs</i>	<i>69</i>
<i>Table 27: Town of Havana Management Strategies Outside of the PFAs</i>	<i>69</i>
<i>Table 28: Water Quality Monitoring Parameters for the River Sites.....</i>	<i>72</i>
<i>Table 29: Water Quality Monitoring Parameters for the Spring Vent and Conduit Sites</i>	<i>73</i>
<i>Table 30: BMAP Water Quality Monitoring Network.....</i>	<i>73</i>
<i>Table 31: Biological Monitoring</i>	<i>76</i>
<i>Table A-1: Major Hydrologic Basins by Group and Department District Office</i>	<i>80</i>
<i>Table C-1: Summary of the City of Tallahassee Stormwater Treatment Projects.....</i>	<i>82</i>
<i>Table E-1: Local and Regional Stormwater and Water Quality Protection Websites</i>	<i>91</i>
<i>Table E-2: State Stormwater and Water Quality Protection Websites.....</i>	<i>91</i>
<i>Table E-3: National Stormwater and Water Quality Protection Websites.....</i>	<i>91</i>

LIST OF ACRONYMS AND ABBREVIATIONS

AVA	Aquifer Vulnerability Assessment
AWT	Advanced Waste Treatment
BMAP	Basin Management Action Plan
BMP	Best Management Practice
Department	Florida Department of Environmental Protection
EPA	U.S. Environmental Protection Agency
F.A.C.	Florida Administrative Code
FAMU	Florida Agricultural and Mechanical University
FDACS	Florida Department of Agriculture and Consumer Services
FDOH	Florida Department of Health
FDOT	Florida Department of Transportation
FGS	Florida Geological Survey
F.S.	Florida Statutes
FSU	Florida State University
FWRA	Florida Watershed Restoration Act
FYN	Florida Yards and Neighborhoods
GIS	Geographic Information Systems
gpd	Gallons Per Day
HA	Habitat Assessment
kg/yr	Kilograms Per Year
LA	Load Allocation
LIDAR	Light Detecting and Ranging
LVS	Linear Vegetation Survey
mg/L	Milligrams Per Liter
MS4	Municipal Separate Storm Sewer System
NPDES	National Pollutant Discharge Elimination System
NFWMD	Northwest Florida Water Management District
OSTDS	Onsite Treatment and Disposal Systems
PFA	Priority Focus Area
ppb	Parts Per Billion
PSPZ	Primary Springs Protection Zone
RESTORE	Resources and Ecosystems Sustainability, Tourist Opportunities and Revived Economies of the Gulf Coast States (Act)
RPS	Rapid Periphyton Survey
SCI	Stream Condition Index
SESF	Southeast Spray Field
SRF	State Revolving Fund
STORET	Storage and Retrieval (Database)
TCC	Tallahassee Community College
TIF	Tax Increment Financing (District)
TMDL	Total Maximum Daily Load
TN	Total Nitrogen
USGS	U.S. Geological Survey
WBID	Waterbody Identification (Number)
WLA	Wasteload Allocation
WWTP	Wastewater Treatment Plant
WWTF	Wastewater Treatment Facility

SUMMARY

UPPER WAKULLA RIVER AND WAKULLA SPRINGS BASIN

The Wakulla River watershed and Wakulla Springs springshed are located within portions of southern Georgia, and Gadsden, Jefferson, Leon, and Wakulla Counties in Florida. The focus for the Upper Wakulla River and Wakulla Springs Basin Management Action Plan (BMAP) is on the portion of the springshed located in Florida, which is referred to as the BMAP basin (see **Figure ES-1**). The BMAP basin encompasses an area of approximately 848,445 acres or 1,325 square miles.

Wakulla Springs is the primary source of water to the Wakulla River. Within the Upper Wakulla River and Wakulla Springs Basin, the Cody Scarp generally separates the semi-confined geologic features to the north (soils characterized with lower potential for ground water impacts) and areas of unconfined geologic features to the south (highly permeable karst areas with a high potential for ground water impacts). The Wakulla River is about nine miles long, starting near Camp Indian Springs and joining the St. Marks River near Fort San Marcos de Apalache. However, the BMAP extent of the Upper Wakulla River ends at the Highway 98 bridge. Major centers of population within the basin include the City of Tallahassee, Woodville, and Crawfordville (Department 2012a). As reported by Kincaid (2010), the efforts of numerous underwater cave explorers and scientists have identified a complex system of ground water conduits that interconnect many of the sinking streams in the basin, as well as the City of Tallahassee Southeast Spray Field (SESF) to the Wakulla River and Wakulla Springs.

Within the Upper Wakulla River and Wakulla Springs Basin, two Priority Focus Areas (PFAs) were identified to focus management strategies for the first BMAP iteration. These PFAs represent the areas in the basin where the aquifer is most vulnerable to inputs and where there are the most connections between the ground water and Wakulla Springs.

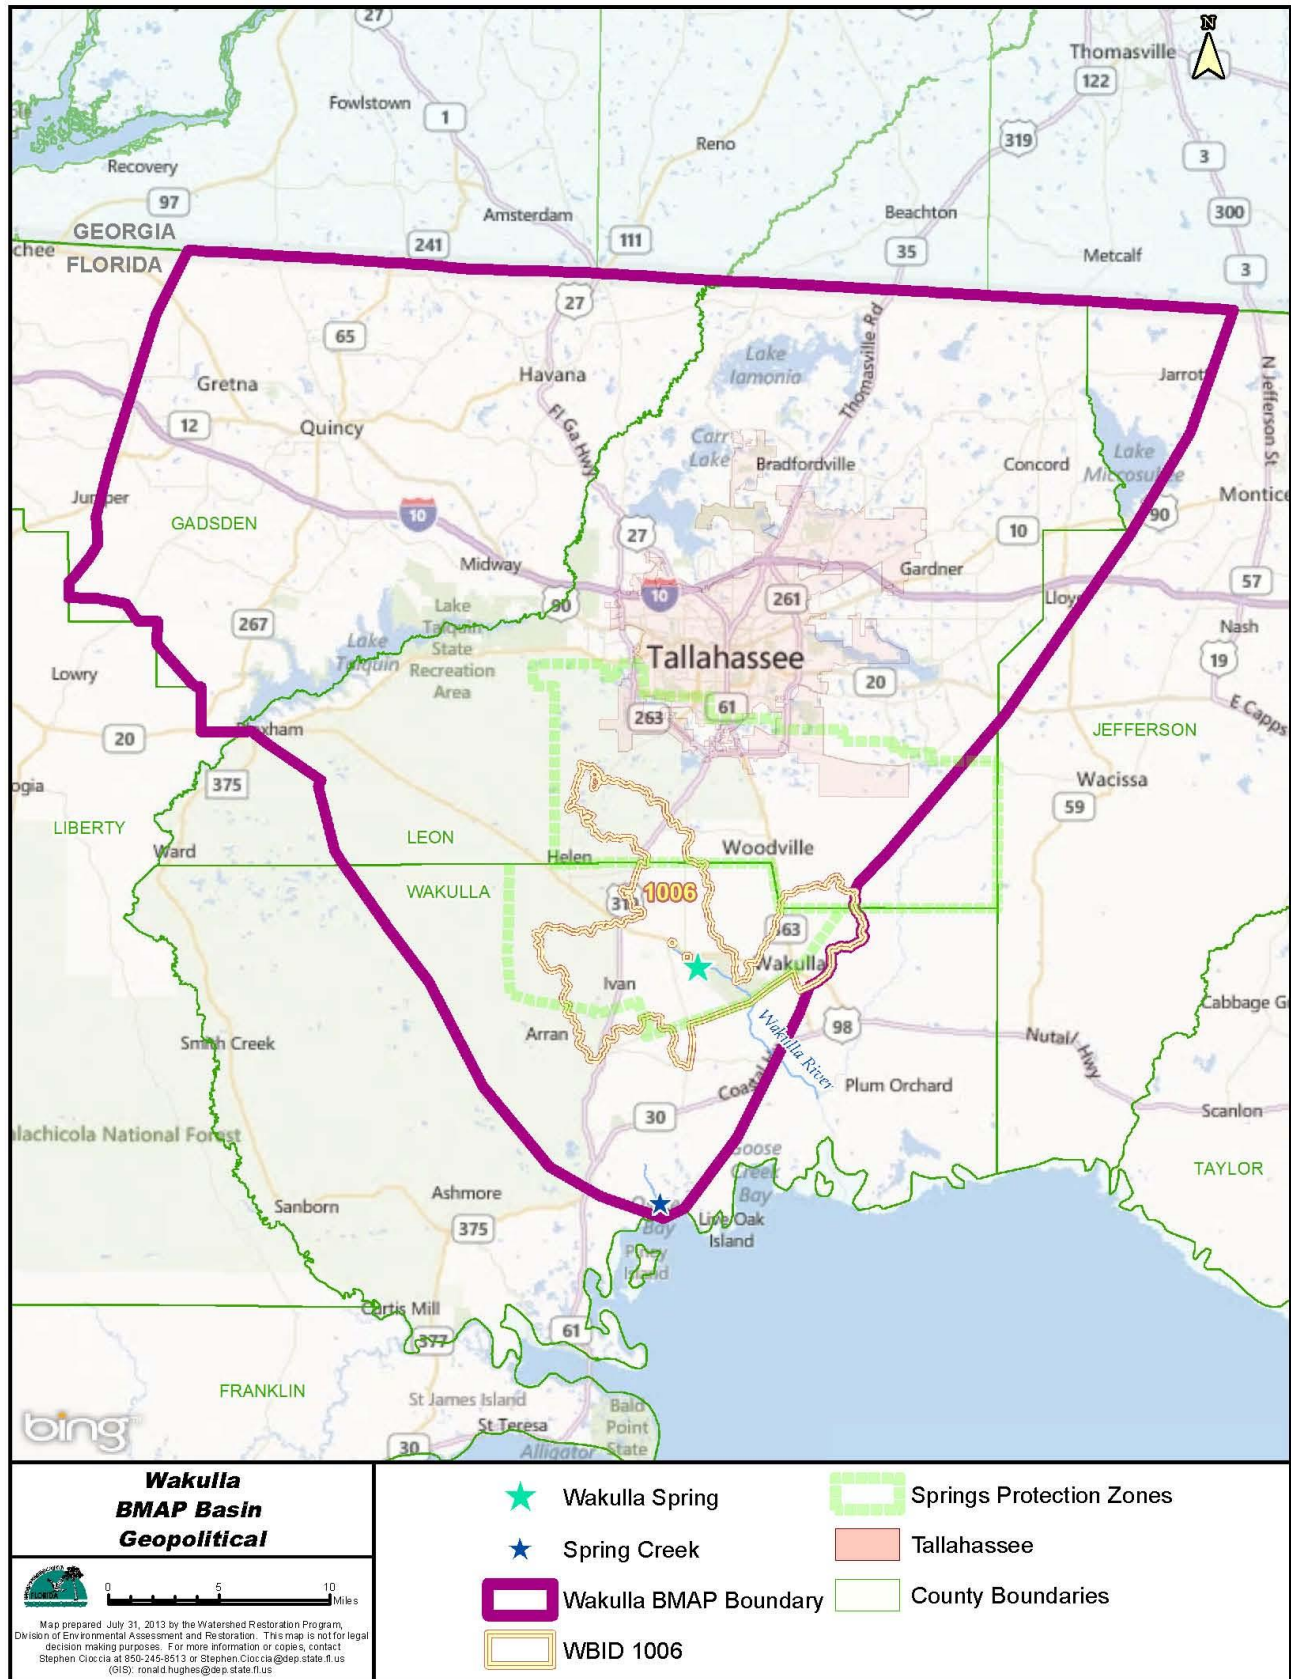


FIGURE ES-1: UPPER WAKULLA RIVER AND WAKULLA SPRINGS BASIN

TOTAL MAXIMUM DAILY LOADS (TMDLs)

TMDLs are water quality targets that are based on state water quality standards for specific pollutants, such as excessive nitrate. The Department determined that the Upper Wakulla River waterbody identification (WBID) number 1006 was impaired by nitrate, which was defined in the TMDL as nitrate + nitrite as nitrogen, using data from January 1, 2000 through June 30, 2007. This determination was made based on stream condition index (SCI) surveys that indicated healthy biological community conditions in the Upper Wakulla River in only 7 of 27 sampling events. The biological community in the river is affected by excessive algal mats that were linked to elevated nitrate concentrations from anthropogenic sources (Department 2012a). **Table ES-1** lists the TMDL and pollutant load allocation adopted by rule for the Upper Wakulla River WBID.

TABLE ES-1: UPPER WAKULLA RIVER TMDL

¹ There are no National Pollutant Discharge Elimination System (NPDES) wastewater facilities that discharge directly into the Upper Wakulla River.

² None of the NPDES municipal separate storm sewer systems (MS4s) discharges directly into the Upper Wakulla River.

WBID	PARAMETER	TMDL (MG/L)	TMDL % REDUCTION	WASTELOAD ALLOCATION FOR WASTEWATER	WASTELOAD ALLOCATION FOR NPDES STORMWATER (% REDUCTION)	LOAD ALLOCATION (% REDUCTION)
1006	Nitrate, as monthly average	0.35	56.2%	N/A ¹	N/A ²	56.2%

UPPER WAKULLA RIVER AND WAKULLA SPRINGS BMAP

Paragraph 403.067(7)(a)1, Florida Statutes (F.S.), authorizes the Department to adopt BMAPs that provide for phased implementation of the strategies necessary to ultimately achieve the associated TMDLs. This approach allows stakeholders to establish management strategies and incrementally plan, budget, and execute projects while simultaneously monitoring and conducting studies to better understand the water quality dynamics (sources and response variables) in the basin. This BMAP is the first iteration for the Upper Wakulla River and Wakulla Springs Basin and it covers a five-year period.

Since the TMDL period, the largest source of loading to the Upper Wakulla River and Wakulla Springs, the City of Tallahassee's T.P. Smith Wastewater Treatment Facility (WWTF), has been upgraded to reduce nitrate concentrations by approximately 80%. Further reductions in nitrate concentrations are expected in the river and springs due to this WWTF upgrade, as well as other completed actions in the basin (see **Figure ES-2**). Given the need for further monitoring to determine to what extent additional reductions are needed, this BMAP used a sufficiency of effort evaluation based on source categories to move forward with reductions in the first five-year implementation period.

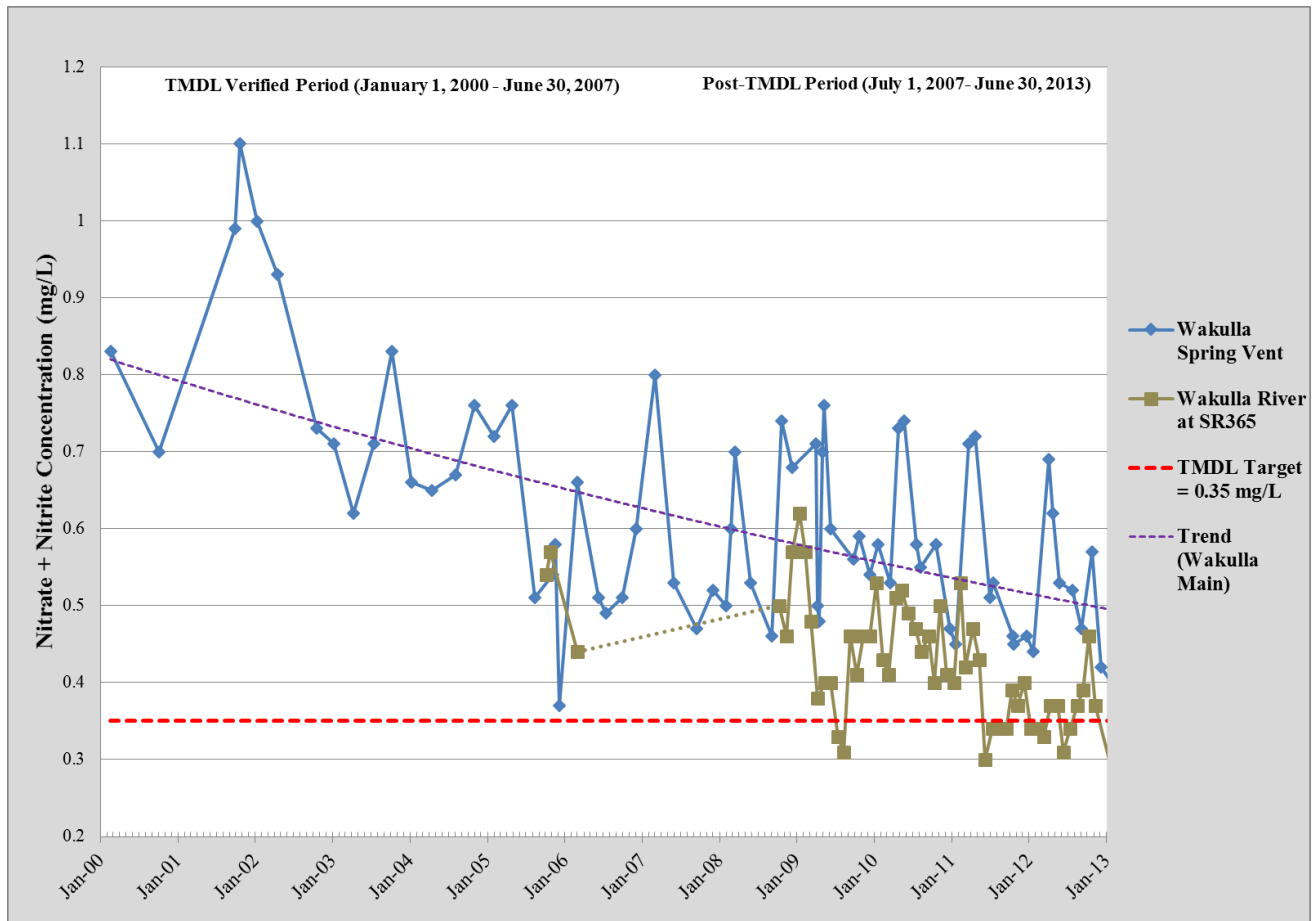


FIGURE ES-2: WATER QUALITY TRENDS IN THE WAKULLA RIVER AND WAKULLA SPRING VENT

Using information on sources in the basin, the stakeholders within the PFAs were asked to submit management strategies to reduce nitrate loading from the sources they are responsible for managing. The Department then compared the strategies provided to the sources within the PFAs to evaluate whether each of the existing sources was sufficiently addressed for the first BMAP iteration and whether strategies were in place or would be put into place to reduce nitrate sources. Where needed, the Department requested additional details and strategies from the responsible stakeholders to assess sufficiency for the first BMAP iteration.

To ensure sufficiency for addressing onsite sewage treatment and disposal systems (OSTDS), the Department is undertaking an OSTDS Initiative, in cooperation with the Florida Department of Health (FDOH), City of Tallahassee, Leon County, Wakulla County, and other parties. The objective of the OSTDS Initiative is to identify and implement effective, financially feasible strategies to reduce nutrient loads from OSTDS sources. The Department and stakeholders will identify options for addressing OSTDS loading, identify effective strategies for the Upper Wakulla River and Wakulla Springs Basin,

establish education and outreach programs, determine responsibilities, and identify funding sources and an implementation schedule for the management strategies.

For the first five years of BMAP implementation, collectively the management strategies included in the BMAP are sufficient and reasonable to address nitrate loading in the PFAs to the Upper Wakulla River and Wakulla Springs Basin. Additional management strategies may be required in the next BMAP iteration unless more current water quality data indicate that the TMDL has been achieved.

The requirements of this BMAP are enforceable by the Department. For point sources, both WWTFs and MS4s, the BMAP and required TMDL reductions are also enforceable through NPDES or state permits. For non-MS4 sources, the BMAP requirements and TMDL reductions are enforceable under Section 403.067, F.S. Furthermore, an agricultural nonpoint source discharger included in a BMAP must demonstrate compliance with required reductions by either implementing the appropriate best management practices (BMPs) or conducting water quality monitoring prescribed by the Department or a water management district that demonstrates compliance with state water quality standards.

KEY ELEMENTS OF THE BMAP

This BMAP addresses the key elements required by the Florida Watershed Restoration Act (FWRA), Chapter 403.067, F.S., including the following:

- *Document how the public and other stakeholders were encouraged to participate or participated in developing the BMAP (**Section 1.3.1**).*
- *Identify the mechanisms by which potential future increases in pollutant loading will be addressed (**Section 1.5**).*
- *Document management strategies to achieve the TMDLs (**Chapter 4 and Chapter 5**).*
- *Document the implementation schedule, feasible funding strategies, responsibilities, and milestones (**Chapter 4 and Chapter 5**).*
- *Identify monitoring, evaluation, and a reporting strategy to evaluate reasonable progress over time (**Section 6.3**).*

ANTICIPATED OUTCOMES OF BMAP IMPLEMENTATION

Through the implementation of management strategies and additional source assessment in this BMAP, stakeholders expect the following outcomes:

- *Continued improvement in the water quality conditions in the Upper Wakulla River and Wakulla Springs.*
- *Decreased loading of the target pollutant (nitrate).*
- *Increased coordination, such as through the OSTDS Initiative and annual meetings, among state and local governments and within divisions of local governments in problem solving for water quality restoration.*
- *Determination of effective management strategies through the stakeholder decision-making and priority-setting processes.*
- *Enhanced public awareness of pollutant sources, pollutant impacts on water quality, and corresponding corrective actions.*
- *Enhanced understanding of basin hydrology, water quality, and pollutant sources.*

BMAP COST

Costs were provided for 29.9% of the management strategies identified in the PFAs. For those strategies with provided costs, the estimated total cost is more than \$425.4 million. Of this total, \$241,013,000 has been spent on projects completed since 2004, \$78,832,989 has been spent on completed projects, and \$105,567,100 could be spent on planned or proposed projects. In addition, costs were provided for 26.7% of the strategies identified outside of the PFAs, with an estimated total cost of almost \$1.4 million. Of this cost, \$1,190,000 has been spent on completed projects and \$200,000 could be spent on proposed projects. Some of these cost estimates may include operations and maintenance for structural projects.

The funding sources for the management strategies range from local contributions to legislative appropriations. Stakeholders will continue to explore new opportunities for funding assistance to ensure that the strategies listed in this BMAP can be maintained at the necessary level of effort.

BMAP FOLLOW-UP AND COMMITMENT TO IMPLEMENTATION

The Department will work with the stakeholders to organize the monitoring data and track management strategy implementation. The results of these efforts will be used to evaluate whether the BMAP is effective in reducing nitrate concentrations and loads in the basin. In addition to activities for the OSTDS Initiative, the Upper Wakulla River and Wakulla Springs stakeholders will meet approximately

every 12 months after BMAP adoption to follow up on plan implementation, share new information, and continue to coordinate on TMDL-related issues. More frequent meetings may be held, if needed.

The stakeholders have committed to implementing the management strategies included in this BMAP and to work together to attain the Upper Wakulla River TMDL.

Chapter 1: CONTEXT, PURPOSE, AND SCOPE OF THE PLAN

The Upper Wakulla River and Wakulla Springs Basin is located in the Big Bend area of Florida in Gadsden, Jefferson, Leon, and Wakulla Counties. The Upper Wakulla River and Wakulla Springs are designated as Outstanding Florida Waters, and are important resources that have been affected by nitrate loading from anthropogenic sources in the basin. To address the nitrate impacts to the aquatic biological community in this impaired water, the Florida Department of Environmental Protection adopted a total maximum daily load (TMDL) to reduce the nitrate inputs to the river and springs. The greatest source of water to the Wakulla River is Wakulla Springs. The river and springs are a very dynamic ground water and surface water fed system.

This Basin Management Action Plan (BMAP) represents the joint efforts of multiple stakeholders to prepare strategies for water quality restoration for the Upper Wakulla River and Wakulla Springs to work towards achieving the adopted TMDL. The BMAP includes management strategies to reduce nitrate concentrations in the Upper Wakulla River, targeted at restoring the natural aquatic biological community, along with a monitoring plan to guide effective long-term restoration efforts. The BMAP was developed as part of Florida's TMDL Program. Stakeholder involvement is critical to the success of the TMDL Program.

Stakeholder involvement is particularly essential to develop, gain support for, and secure commitments in a BMAP. The Department invited all interested stakeholders to participate in the Upper Wakulla River and Wakulla Springs BMAP development and facilitated participation to ensure that all voices were heard and opinions considered. This approach resulted in the use of a phased implementation process to achieve the TMDL target. The first five-year BMAP iteration is expected to achieve discernible results through the actions outlined in this document.

This chapter describes the TMDL Program, stakeholder involvement in BMAP development, BMAP purpose and scope, BMAP approach, TMDL addressed, assumptions and considerations identified during BMAP development, and future growth in the basin.

1.1 WATER QUALITY STANDARDS AND TMDLS

Florida's water quality standards are designed to ensure that surface waters can be used for their designated purposes, such as drinking water, recreation, wildlife, habitat, and agriculture. Currently,

most surface waters in Florida, including those in the Upper Wakulla River Basin, are categorized as Class III waters, which means they must be suitable for recreation and must support the propagation and maintenance of a healthy, well-balanced population of fish and wildlife. **Table 1** shows all designated use categories.

TABLE 1: DESIGNATED USE ATTAINMENT CATEGORIES FOR FLORIDA SURFACE WATERS

* Class I and II waters include the uses of the classifications listed below them.

** Surface water classification for waters in the Upper Wakulla River Basin.

CATEGORY	DESCRIPTION
Class I*	Potable water supplies
Class II*	Shellfish propagation or harvesting
Class III**	Recreation, propagation and maintenance of a healthy, well-balanced population of fish and wildlife
Class III-Limited	Fish consumption, recreation or limited recreation, and/or propagation and maintenance of a limited population of fish and wildlife
Class IV	Agricultural water supplies
Class V	Navigation, utility, and industrial use (<i>no current Class V designations</i>)

Under Section 303(d) of the federal Clean Water Act, every two years each state must identify its “impaired” waters, including estuaries, lakes, rivers, and streams, that do not meet their designated uses and are not expected to improve before the next 303(d) list is prepared for the basin. The Department is responsible for developing this “303(d) list” of impaired waters in Florida.

Florida’s 303(d) list identifies waterbody segments that do not meet the state’s water quality standards and are thus considered impaired. In Florida, the four most common water quality concerns are nutrients, oxygen-demanding substances, mercury, and fecal coliforms. The 303(d)-listed waterbody segments are candidates for more detailed assessments of water quality to determine whether they are impaired according to state statutory and rule criteria. The Department develops and adopts TMDLs for the waterbody segments it identifies as impaired and for which a causative pollutant has been identified. A TMDL is the maximum amount of a specific pollutant that a waterbody can assimilate while maintaining its designated uses.

The water quality evaluation and decision-making processes for listing impaired waters and establishing TMDLs are authorized by Section 403.067, Florida Statutes (F.S.), known as the Florida Watershed Restoration Act (FWRA), and contained in Florida’s Identification of Impaired Surface Waters Rule (Chapter 62-303, Florida Administrative Code [F.A.C.]). The impaired waterbody, the Upper Wakulla River, addressed in this BMAP is a Class III water. The TMDL for the Upper Wakulla River has been

established and addresses the nitrate + nitrite as nitrogen concentration target required for this waterbody to maintain a healthy aquatic biological community per the Class III designated use.

TMDLs are developed and implemented as part of a watershed management cycle that rotates through the state's 52 river basins every five years (see **Appendix A**) to evaluate waters, determine impairments, and develop and implement management strategies to restore impaired waters to their designated uses.

Table 2 summarizes the five phases of the watershed management cycle.

TABLE 2: PHASES OF THE WATERSHED MANAGEMENT CYCLE

PHASE	ACTIVITY
Phase 1	Preliminary evaluation of water quality.
Phase 2	Strategic monitoring and assessment to verify water quality impairments.
Phase 3	Development and adoption of TMDLs for waters verified as impaired.
Phase 4	Development of management strategies to achieve the TMDL(s).
Phase 5	Implementation of TMDL(s), including monitoring and assessment.

1.2 TMDL IMPLEMENTATION

Rule-adopted TMDLs may be implemented through BMAPs, which contain strategies to reduce and prevent pollutant discharges into impaired waterbodies through various cost-effective means. During Phase 4 of the watershed management cycle, the Department and the affected stakeholders in the various basins jointly develop BMAPs or other implementation approaches. Based on practical considerations, a basin may have more than one BMAP. The FWRA contains provisions that guide the development of BMAPs and other TMDL implementation approaches.

Stakeholder involvement is critical to the success of the TMDL Program and varies with each phase of implementation to achieve different purposes. The BMAP development process is structured to achieve cooperation and consensus among a broad range of interested parties. As indicated in statute, the Department invites stakeholders to participate in the BMAP development process and encourages public participation and consensus to the greatest practicable extent. The Department must hold at least one noticed public meeting in the basin to discuss and receive public comments during the planning process.

1.3 UPPER WAKULLA RIVER AND WAKULLA SPRINGS BMAP

1.3.1 PLAN PURPOSE AND SCOPE

The purpose of this BMAP is to implement nitrate reductions to achieve the Upper Wakulla River TMDL. This plan outlines management strategies that have provided or will provide nitrate reductions and a schedule for implementation for the first five-year BMAP iteration. The BMAP also details a monitoring approach to measure progress towards the nitrate target concentration and improvement in the river's biological community. The stakeholders will meet approximately annually to review progress made towards achieving the TMDLs.

In 2009, the Department adopted a nutrient TMDL for the Upper Wakulla River, which is waterbody identification (WBID) number 1006. Based on potentiometric maps of ground water levels, the Wakulla Springs springshed is located within portions of southern Georgia, and Gadsden, Jefferson, Leon, and Wakulla Counties in Florida. Based on topographic maps and surficial water features, the Upper Wakulla River surface watershed extends into Leon and Wakulla Counties. The focus for the Upper Wakulla River and Wakulla Springs BMAP is on the portion of the springshed located in Florida (see **Figure 1**). The BMAP basin encompasses an area of approximately 848,445 acres or 1,325 square miles, which is larger than the basin area included in the TMDL. The BMAP basin boundary was extended based on information from studies in the basin, potentiometric surface maps, and feedback from the stakeholders.

1.3.1.1 Priority Focus Areas

Within the Upper Wakulla River and Wakulla Springs Basin, two Priority Focus Areas (PFAs) were identified to focus management strategies for the first BMAP iteration (see **Figure 1**). These PFAs represent the areas in the basin where the aquifer is most vulnerable to pollutant inputs, where there are the fastest ground water travel times, and where there is a known connectivity between ground water pathways and Wakulla Springs. The PFAs were identified using information on the areas classified as “most” and “more” vulnerable from the Leon County Aquifer Vulnerability Assessment (AVA) (Baker 2007) and Wakulla County AVA (Baker 2009). Development of the PFA boundaries did not take surface features or land use activities into account. The PFAs are intended to provide a guide for focusing strategies where the science suggests these efforts will best benefit the spring.

PFA1 is the primary area of concern for sources contributing to the nitrate impairment. This area has either documented evidence or the highest probability to regularly contribute loading to the ground water flows to Wakulla Springs. PFA1 has the highest probability for surficial infiltration and contribution to the ground water based on information in the AVA reports. This area is also characterized as having the most direct and fastest ground water travel times to Wakulla Springs, based on dye trace studies conducted in the basin.

PFA2 is the secondary area of concern for sources contributing to the nitrate impairment. This area also has a high probability for surficial infiltration to the ground water and contribution to Wakulla Springs, based on the AVA reports. However, this area has a more intermittent contribution to the ground water flows to the springs based on the dye trace studies for the basin.

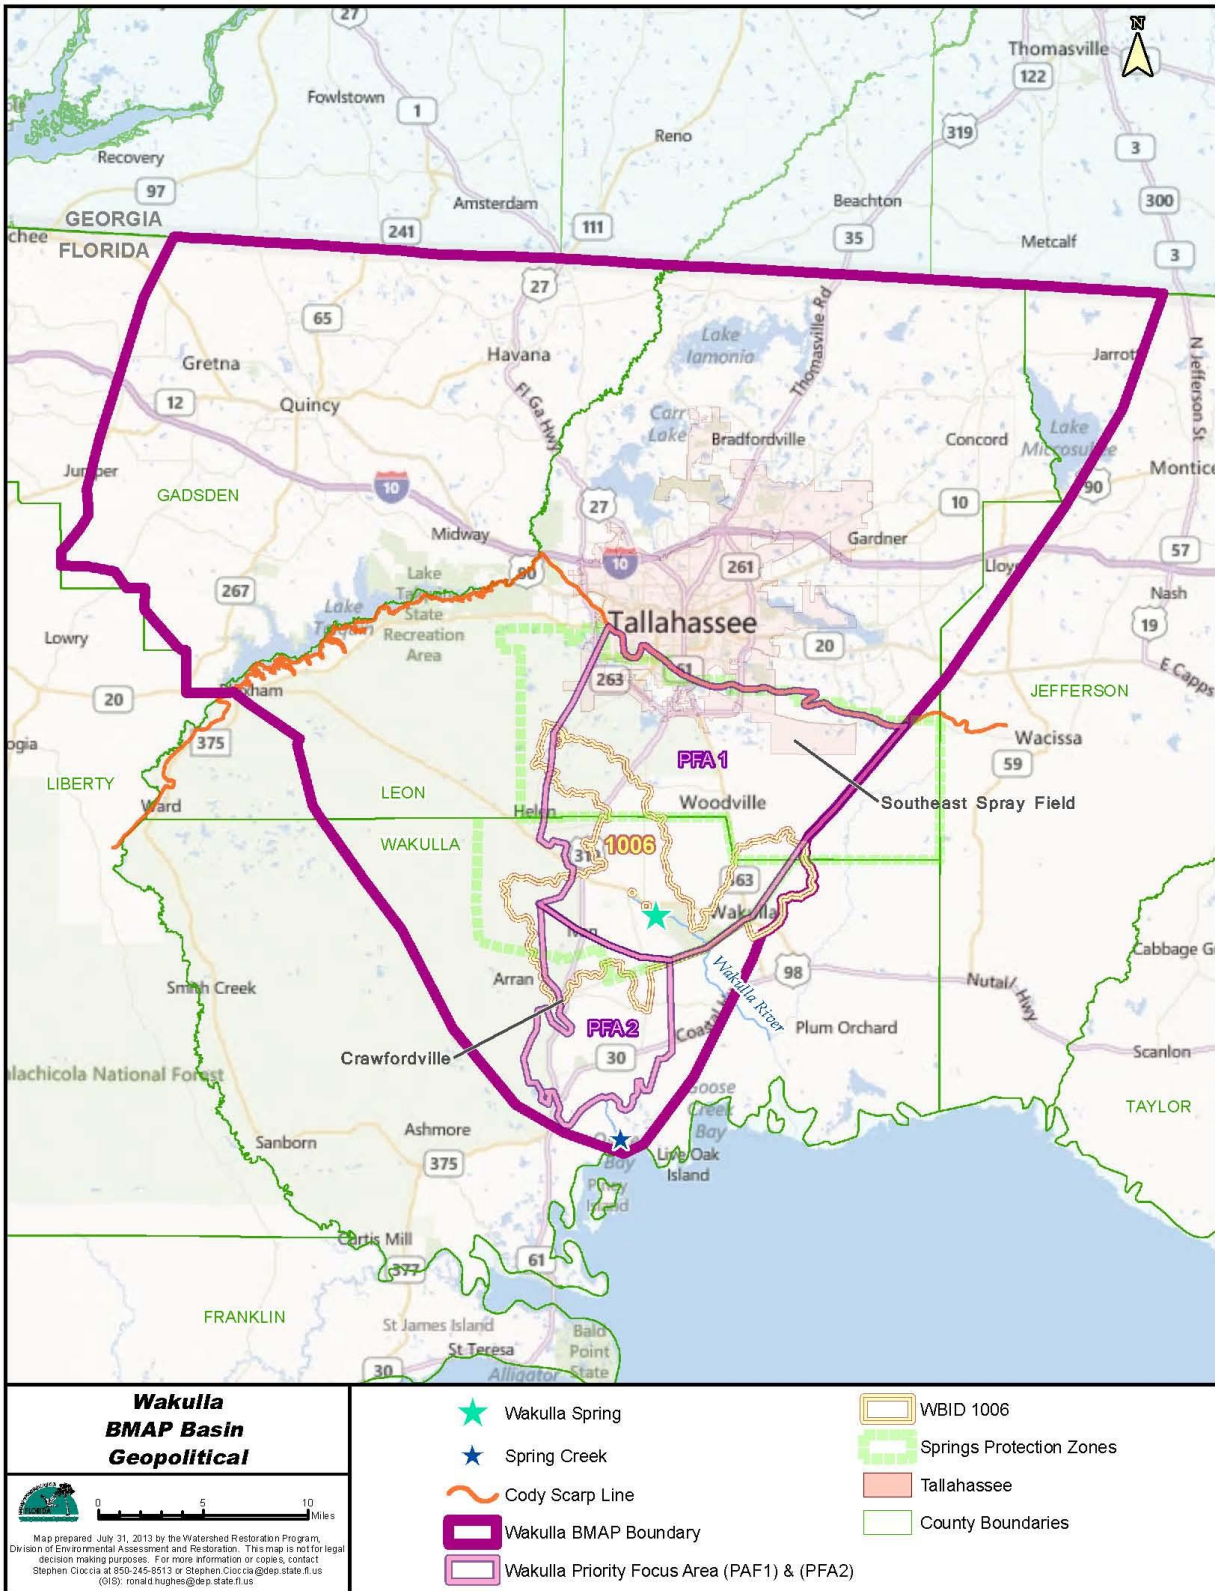


FIGURE 1: UPPER WAKULLA RIVER AND WAKULLA SPRINGS BASIN

1.3.2 STAKEHOLDER INVOLVEMENT

The BMAP process engages local stakeholders and promotes coordination and collaboration to address the nitrate reductions to achieve the Upper Wakulla River TMDL. The following entities are the stakeholders that are responsible for load reductions and monitoring within the PFAs:

- *Agriculture.*
- *City of Tallahassee.*
- *Florida Department of Agriculture and Consumer Services (FDACS).*
- *Florida Department of Environmental Protection, including Wakulla Springs State Park.*
- *Florida Department of Health (FDOH).*
- *Florida Department of Transportation (FDOT) District 3.*
- *Leon County.*
- *Leon County Health Department.*
- *Northwest Florida Water Management District (NFWFMD).*
- *Wakulla County.*
- *Wakulla County Health Department.*

In addition, the following entities are responsible for load reductions within the basin but outside of the PFAs:

- *City of Gretna.*
- *City of Midway.*
- *City of Quincy.*
- *Federal Correctional Institution, Tallahassee.*
- *Florida Agricultural and Mechanical University (FAMU).*
- *Florida State University (FSU).*
- *Gadsden County.*

- *Jefferson County.*
- *Tallahassee Community College (TCC).*
- *Talquin Electric Cooperative.*
- *Town of Havana.*

In addition to the responsible stakeholders above, several other interested parties and entities participated in the Upper Wakulla River and Wakulla Springs BMAP meetings, as follows:

- *1000 Friends of Florida.*
- *Citizens.*
- *Florida Department of Economic Opportunity.*
- *Friends of Wakulla Springs.*
- *Wakulla Springs Alliance.*

In January 2013, the Department initiated the BMAP development process and held a series of technical meetings involving stakeholders and the general public. The purpose of these meetings was to consult with stakeholders to gather information about the basin and identify specific management strategies that would reduce nitrate loading. Technical meetings were held to gather information, identify potential sources, define management strategies currently underway or planned, and develop the BMAP contents and actions that will reduce nitrate loading with the ultimate goal of achieving the TMDL. All technical meetings were open to the public and noticed in the *Florida Administrative Register*. Technical meetings were held regularly throughout the BMAP development process on the following dates:

- *January 18, 2013.*
- *February 22, 2013.*
- *March 28, 2013.*
- *April 18, 2013.*
- *May 16, 2013.*

- June 25, 2013.
- August 15, 2013.
- September 19, 2013.
- October 31, 2013.

In addition to technical meetings, the Department met with stakeholders in one-on-one meetings. The purpose of these meetings was to discuss different aspects of the BMAP, such as management strategies, with the responsible stakeholders. Stakeholders were also encouraged to contact Department staff via phone and email to participate in forming the plan. A public workshop on the BMAP was also held on [date]. The public workshop was noticed in the [list of newspapers].

Except as specifically noted in subsequent sections, this BMAP document reflects the Department's approach to achieving the TMDL based upon its research and input from the stakeholders, along with public input from workshops and meetings held to discuss key aspects of the TMDL and BMAP development.

1.3.3 BMAP APPROACH

The BMAP provides for phased implementation under Paragraph 403.067(7)(a)1, F.S. The management actions and adaptive management approach described in the BMAP will address nitrate reductions, and the process will continue until the TMDL target is attained. The phased BMAP approach allows for the implementation of management strategies designed to achieve incremental reductions, while simultaneously monitoring and conducting studies to better understand the water quality dynamics in the basin. The total reductions to achieve the Upper Wakulla River TMDL will be addressed in five-year increments.

Since the TMDL period, the largest source of loading to the Upper Wakulla River and Wakulla Springs, the City of Tallahassee's wastewater treatment facility (WWTF) and Southeast Spray Field (SESF), have been upgraded to reduce nitrate concentrations applied to the land's surface. Current data indicate that these upgrades have reduced total nitrogen (TN) loading to the SESF by 80%, which is about 214,939 kilograms per year (kg/yr) of TN (refer to **Sections 3.1.1** and **4.1.1** for more details). The Upper Wakulla River and Wakulla Springs Basin is a ground water driven system, which results in a lag time between nitrate reductions from management strategy implementation and a change in water

quality at the river and springs. Therefore, further reductions in nitrate concentrations are expected in the river and springs due to the completed actions. Given the progress in load reductions made to date, and the need for further monitoring to determine to what extent additional reductions are needed, this BMAP used a sufficiency of effort evaluation rather than detailed allocations to move forward with reductions in the first five-year iteration. It is not currently feasible to assign detailed allocations for nutrient loads to surface water and ground water in the PFAs. At present, the specific load reductions needed from management strategies benefiting the springshed were not calculated due to the complexities of fate and transport of pollutants in the springshed and the uncertainty associated with expected reductions from some measures.

Using information on sources in the basin (refer to **Section 3.1**), the stakeholders within the PFAs were asked to submit management strategies to reduce nitrate loading from the sources they are responsible for managing. The Department then compared the strategies provided to the sources within the PFAs to evaluate whether each of the existing sources were sufficiently addressed for the first BMAP iteration and whether strategies were in place or would be put into place to reduce future nitrate sources. Where needed, the Department requested additional details and strategies from the responsible stakeholders to ensure sufficiency for the first BMAP iteration.

Collectively, the management strategies included in the BMAP are sufficient to address nitrate loading in the PFAs to the Upper Wakulla River and Wakulla Springs Basin over the next five years. These strategies are described in **Chapter 4**. Management strategies were also provided by the stakeholders located outside of the PFAs, and these strategies are described in **Chapter 5**. After year four of BMAP implementation, the Department will evaluate available water quality data to determine progress towards the nitrate target. Discussions will then be held with the responsible stakeholders to identify additional strategies for the next BMAP iteration, as needed.

1.3.4 ONSITE SEWAGE TREATMENT AND DISPOSAL SYSTEMS (OSTDS) INITIATIVE

With the major reductions made in WWTF loading in the basin, OSTDS are another source of nitrate loading to be addressed. The Department understands that the selection of management strategies to meet OSTDS reduction requires sufficient time for stakeholders to consult with local decision makers, plan implementation timelines, consider funding sources, and budget available funds. To help address this source of loading in the future, the Department, along with FDOH, the City of Tallahassee, Leon

County, Wakulla County, and other parties will continue to develop nitrogen reducing projects that focus on OSTDS sources.

The objective of the OSTDS Initiative is to identify effective, financially feasible strategies to reduce nutrient loads from OSTDS sources. The Department and stakeholders will identify options for addressing OSTDS loading, identify effective strategies for the Upper Wakulla River and Springs Basin, establish education and outreach programs, determine responsibilities, and identify funding sources and an implementation schedule for the management strategies.

1.3.4.1 General Direction for the OSTDS Initiative

The Department will conduct technical meetings, which will include representatives from FDOH, the county health departments, local governments, and utilities in the BMAP area in order to identify, schedule, and implement management strategies necessary to reduce nutrient loading from septic tanks. Within three months from the date of adoption of the BMAP, the Department shall conduct an initial technical meeting to present the methodology and Geographic Information Systems (GIS) data to prioritize areas where septic tanks pose the greatest risk based on the number of septic tanks in aggregate, soil drainage conditions, aquifer and surface water vulnerability, proximity to a spring, and ground water travel time. Within three years from the date of adoption of the BMAP, the Department will develop an OSTDS Plan with the following primary components:

- *Map the priority areas by local government geographic jurisdiction.*
- *Identify existing and planned wastewater treatment and collection facilities, including existing and design capacities, and analyze opportunities to connect existing septic tanks in priority areas, taking into account the financial needs of the local service providers and impacts on homeowners. Refine an inventory and geographic distribution of septic tanks within the priority areas, including all existing systems and areas where future growth is expected during a five- to ten- year horizon.*
- *Identify the nutrient reductions from septic tanks, which remain necessary to achieve the TMDL. Future reduction goals may be achieved in multiple ways including the connection of existing septic tanks to central wastewater treatment facilities, the use of cluster systems, educational strategies, requirements for new development to be served by central wastewater service, the adoption of technologies recommended by FDOH's*

Nitrogen Reduction Study, or other strategies that may be appropriate. The strategies will be prioritized based on the effectiveness and feasibility.

- *Also within three years from the date of adoption of the BMAP, stakeholders will submit to the Department projects and management strategies that include proposed implementation schedules to address septic tank loads by connecting septic tanks to sewer in priority areas. Special emphasis will be placed on projects which are in process, shovel-ready prior to the end of this first five-year BMAP cycle, and within priority geographical areas.*

This implementation cycle will allow flexibility to substitute projects in light of state and local funding and the potential use of Resources and Ecosystems Sustainability, Tourist Opportunities and Revived Economies of the Gulf Coast States (RESTORE) Act funding for expansion of Wakulla County wastewater capabilities, legislative direction, and the completion of the legislatively mandated FDOH Nitrogen Reduction Study.

1.3.5 POLLUTANT REDUCTION AND DISCHARGE ALLOCATIONS

1.3.5.1 Categories for Rule Allocations

The rules adopting TMDLs must establish reasonable and equitable allocations that will alone, or in conjunction with other management and restoration activities, attain the TMDLs. Allocations may be to individual sources, source categories, or basins that discharge to the impaired waterbody. The allocations in rule identify either how much pollutant discharge each source designation may continue to contribute (discharge allocation), or the load or percentage of its loading the source designation must reduce (reduction allocation). Currently, the TMDL allocation categories are as follows:

- ***Wasteload Allocation (WLA)*** *is the allocation to point sources permitted under the National Pollutant Discharge Elimination System (NPDES) Program. It includes the following:*
 - Wastewater Allocation is the discharge allocation to industrial and domestic WWTFs.
 - NPDES Stormwater Allocation is the allocation to NPDES stormwater permittees that operate municipal separate storm sewer systems (MS4s). These permittees are treated as point sources under the TMDL Program.

- **Load Allocation (LA)** is the allocation to nonpoint sources, including agricultural runoff and stormwater from areas that are not included in an MS4 permit.

The TMDL did not specify WLAs to NPDES WWTFs or MS4s because there are no WWTFs and MS4s with discharges into the Upper Wakulla River WBID (Department 2012a). However, there are WWTFs and MS4s discharges within the Upper Wakulla River and Wakulla Springs Basin, which are included in this BMAP.

1.3.5.2 Allocations Implemented by the BMAP

The FWRA, Section 403.067, F.S., states that the BMAP must equitably allocate pollutant reductions to individual basins, as a whole to all basins, or to each identified point source or category of nonpoint sources, as appropriate. Allocations are determined based on a number of factors listed in the FWRA, including cost-benefits, technical and environmental feasibility, implementation time frames, and others. The adopted TMDL (see **Section 1.3.6**) sets the allocations, as a percent reduction, to the nonpoint source category (LA) in order to achieve the target concentration of 0.35 milligrams per liter (mg/L) of nitrate + nitrite in the Upper Wakulla River. This BMAP implements the TMDL allocations for the nonpoint sources, which assigns the TMDL target as a whole to all basins. However, this BMAP initially focuses on achieving the TMDL target in the PFAs, and includes more stringent nitrogen limitations for WWTFs that discharge to land surface infiltration and contribute nitrogen loading to ground water in PFA1. More detailed allocations may be developed, if needed, for the next BMAP iteration.

The main sources of loading to the Upper Wakulla River come from the surrounding springshed, and the 0.35 mg/L nitrate + nitrite target concentration is also the criterion for springs. Therefore, the reductions associated with the strategies in this BMAP will improve the quality of both the Upper Wakulla River and Wakulla Springs.

1.3.6 UPPER WAKULLA RIVER TMDL

The Department adopted the *Nutrient (Biology) TMDL for the Upper Wakulla River (WBID 1006)* in March 2012 through Rule 62-304.300[2], F.A.C. (refer to **Appendix B**). The Department determined that the Upper Wakulla River (WBID 1006) was impaired by nitrate based on stream condition index (SCI) surveys that indicated healthy biological community conditions in only 7 of 27 sampling events. The biological community in the river is affected by excessive algal mats that were linked to elevated

nitrate concentrations from anthropogenic sources (Department 2012a). The TMDL defined the nitrate target as composed of both nitrate and nitrite as nitrogen. **Table 3** lists the TMDL and pollutant load allocations adopted by rule for the Upper Wakulla River.

TABLE 3: UPPER WAKULLA RIVER TMDL

¹ There are no NPDES wastewater facilities that discharge directly into the Upper Wakulla River.

² None of the NPDES MS4s discharges directly into the Upper Wakulla River.

WBID	PARAMETER	TMDL (MG/L)	TMDL % REDUCTION	WLA FOR WASTEWATER	WLA FOR NPDES STORMWATER (% REDUCTION)	LA (% REDUCTION)
1006	Nitrate, as monthly average	0.35	56.2%	N/A ¹	N/A ²	56.2%

1.4 ASSUMPTIONS AND CONSIDERATIONS REGARDING TMDL IMPLEMENTATION

The water quality impacts of BMAP implementation are based on several fundamental assumptions about the pollutant targeted by the TMDL, waterbody response, and natural processes. In addition, there are important considerations about the nature of the BMAP and its long-term implementation. These assumptions and considerations are discussed below.

1.4.1 ASSUMPTIONS

The following assumptions were used during the BMAP process:

- *Reductions in nitrate concentrations in the Upper Wakulla River and Wakulla Springs will result in improved biological communities, including a reduction in the amount of algae present in the river.*
- *The greatest source of nitrate loading to the Upper Wakulla River is through Wakulla Springs. Therefore, management strategies that reduce nitrate loading to the ground water were the priority for this BMAP iteration, including more stringent nitrogen limitations for WWTFs that discharge to land surface infiltration and contribute nitrogen loading to ground water in PFA1.*
- *The scope of the TMDL did not include the adjacent Wakulla Springs vent area (WBID1006X) and, therefore, these waters are not applicable for determining achievement of the restoration targets. Although the TMDL did not include the upstream Wakulla Springs vent area, the BMAP incorporates Wakulla Springs and its contributing springshed within the BMAP area. This is based on the integral role of the springshed as the primary source of water inflow to the Upper Wakulla River.*

- *The BMAP focuses on reductions and management strategies within two PFAs. The PFAs were identified using best available information on the most vulnerable aquifer areas and ground water pathways to determine where management strategies would be most beneficial to improving the water quality of the Upper Wakulla River and Wakulla Springs. Pollutant loads contributed within the PFAs are considered to result in the largest magnitude and most immediate impacts to the Upper Wakulla River. In future iterations, the PFAs may be refined using the latest data. The areas of the basin outside the PFAs also contribute loading to the river and springs, but to a much lesser magnitude than the areas within the PFAs. Depending on the water quality changes in the Upper Wakulla and Wakulla Springs, additional management strategies in the area outside the PFAs may be required in future BMAP iterations.*

1.4.2 CONSIDERATIONS

This BMAP requires that all stakeholders in the basin implement their management strategies set forth herein within the first five-year BMAP cycle. However, the full attainment of the TMDL target will be a long-term process. While many of the projects and activities contained in the BMAP are recently completed or currently ongoing, there are many projects that will require time to design, secure funding, and construct. Funding limitations do not impact the requirement that each entity must implement the activities committed to in this BMAP. However, funding was considered, to the extent practicable, when determining the schedule for meeting BMAP requirements. Although strategies funding can be problematic, funding limitations do not affect the requirement that each entity within the PFAs must implement the management strategies listed in the BMAP in order to cumulatively achieve water quality standards.

However, the full implementation of this BMAP will be a long-term process, adaptively managed in five-year cycles. Since BMAP implementation is a long-term process, the TMDL established for this basin will likely not be achieved in the first five-year iteration. It is understood that waterbodies can respond differently to the reduced concentrations and loading. Regular follow-up and continued coordination and communication by the stakeholders will be essential to ensure the implementation of management strategies and assessment of effects. Additional management strategies required to achieve the TMDL will, if necessary, be developed as part of the second BMAP iteration. During the BMAP

process, several items were identified that could be addressed in future watershed management cycles to ensure that future BMAPs use the most accurate information:

- **Water Quality Standards** – *Since the Department adopted the Upper Wakulla River TMDL, numeric nutrient criteria were established for both streams and springs. For future evaluations to determine whether the Upper Wakulla River and Wakulla Springs Basin is meeting water quality standards, the Department will use these numeric nutrient criteria. The BMAP monitoring plan (refer to **Section 6.3**) was designed to collect the data necessary for these new evaluations. These standards require that both the TMDL target nitrate concentration and a healthy biological community be achieved to meet the TMDL. If the nutrient target has been achieved but the biological community is not responding, the Upper Wakulla River would still be considered impaired. The Department would then have to make a determination if the nitrate target should be modified or if another factor is causing the impairment.*
- **Basin Boundary** – *The BMAP basin boundary was determined using information from studies in the basin that delineated boundaries based on potentiometric surface data, water level measurements, and dye trace studies. The available boundaries were compiled by the Department, and the BMAP basin boundary was identified with input from the stakeholders. In future iterations of the BMAP, the basin extent may be modified based on new evidence and better science.*
- **Georgia Sources** – *The BMAP focuses on the Upper Wakulla River and Wakulla Springs Basin within Florida, as the Department only has authority to address nutrient loading within the state. However, a portion of the Wakulla Springs springshed extends into Georgia. Available data indicate that the greatest nutrient loading sources, which are reaching the Upper Wakulla River and Wakulla Springs, are in Florida. However, if significant sources within Georgia are identified, addressing these sources should be considered in the next BMAP iteration. Leon County has already begun efforts to address some of the nutrient loading from Georgia, as summarized in **Table 4**.*

TABLE 4: LEON COUNTY STRATEGIES TO ADDRESS SOURCES IN GEORGIA

NAME	DESCRIPTION	COMPLETION DATE	STATUS
Cities of Thomasville and Moultrie	Based on proactive challenges by Leon County with Georgia Environmental Protection Division, the cities of Thomasville and Moultrie were required to conduct water quality monitoring and upgrades when their plants are expanded.	04/2007	Completed
City of Cairo Georgia	Based on proactive challenges by Leon County with Georgia Environmental Protection Division, Cairo, Georgia closed its sewage land application and built a new treatment facility with additional capacity and capabilities to reduce nitrogen and fecal coliform discharge levels to the Ochlocknee River.	2005	Completed
BASF Corporation Plant in Attapulgus	Leon County is challenging the renewal of the plant's permit to prevent the direct discharge of approximately one million pounds of nitrate per year into the Little River, which flows to Lake Talquin.	Expected by 2018	Ongoing

- **OSTDS** – Based on evaluations of loading in the basin, OSTDS are now the largest contributor of nitrate in the Upper Wakulla River and Wakulla Springs Basin (refer to **Section 3.1**). However, the management strategies that can be implemented at this time to address OSTDS are limited. FDOH is currently conducting a multi-year study to determine the best systems to attenuate nitrate loading. This study is anticipated to be completed in January 2015, and the study results will then be brought to the Legislature for consideration. The results of this study will help to guide OSTDS management strategies in the basin. In the meantime, the Department will work with the responsible local stakeholders and FDOH in the OSTDS Initiative (refer to **Section 1.3.4**) to identify appropriate management strategies and funding sources to address OSTDS loading.
- **Authority to Address OSTDS** – In order to successfully implement the strategies that will be identified through the OSTDS Initiative, some stakeholders have expressed a need for the authority for local governments to address OSTDS loading, and this authority will need to come from the Florida Legislature. Any rules initiated by the stakeholders cannot be less stringent than any state rules for OSTDS. During the first BMAP iteration, proposed legislation may be drafted by the local stakeholders, in collaboration with interested parties, such as the Wakulla Springs Alliance.
- **Lake Swallets** – There are several lakes within the basin that have known sinkholes that drain to ground water. In the next BMAP iteration, if data are available, the nitrate loads from these lakes could be considered and management strategies to address the loading identified, as needed.
- **Management Strategy Implementation** – The management strategies listed in this BMAP and the associated nitrogen reductions will be considered by the Department in the next

BMAP iteration when identifying what additional load reductions are required to meet the TMDL and which sources should implement strategies to achieve the necessary reductions.

- ***Increases in Wastewater Volume in the PFAs** – Through future development and connection of OSTDS to central wastewater treatment systems, there may be an increase in the amount of treated wastewater discharged in the PFAs. The Department will evaluate if there is a net increase in treated wastewater discharge in the PFAs as part of the OSTDS Initiative, and determine if additional strategies are needed to address any additional wastewater loading for the second BMAP iteration.*

1.5 FUTURE GROWTH IN THE WATERSHED

The FWRA requires that BMAPs “identify the mechanisms by which potential future increases in pollutant loading will be addressed.” Since the TMDL reductions are based on decreasing loads from past development, it is important that loads from new development are well controlled. Although future development may be meeting state and local standards, the development may still add a nutrient load to the Upper Wakulla River and Wakulla Springs Basin. To ensure that future growth does not add to the degradation of these waterbodies, the local governments must be proactive in controlling loads from future growth.

This BMAP relies on strategies from the stakeholders that help to minimize loading from future sources. The City of Tallahassee and Leon County have enacted ordinances to establish the Primary Springs Protection Zone (PSPZ), which reduce the development in the urban fringe in the PSPZ and allow development in the urban area only to the extent permitted by the future land use map. Wakulla County has a similar ordinance, which establishes the Wakulla Springs Special Planning Area (refer to **Figure 2**). Wakulla County has a comprehensive plan policy that requires advanced waste treatment (AWT) (3 mg/L for TN) for any WWTF or spray field located within the special planning area. Leon County has a proposed amendment to its code of laws to require AWT within the PSPZ for any WWTF.

The City of Tallahassee, Leon County, and Wakulla County each have fertilizer use ordinances. The City of Tallahassee and Leon County have existing education and outreach programs to educate the public about fertilizer use, and Wakulla County will be adding public outreach activities. The City of Tallahassee and Leon County also have pet waste management ordinances to help reduce impacts from

pet waste in the basin. Leon County adopted countywide land development regulations, which include the City of Tallahassee, that exceed state stormwater standards, and the county is also planning to create a low impact development ordinance to further address loads from new development. Wakulla County has comprehensive land use policies for certain future developments in the county, such as the Northeast Wakulla Sustainable Community, which require higher stormwater treatment levels and a no net increase in nutrients. FDOT has a program to avoid mapped karst caves when constructing stormwater treatment ponds, which will help to reduce loading to the ground water from future projects. Wakulla Springs State Park also has education and outreach programs to educate the public about the importance of the river and springs.

In addition to the items that will be developed through the OSTDS Initiative (see **Section 1.3.4**), Leon County has a proposed effort to sewer within the PSPZ, if funding becomes available. Leon County is also proposing to modify its code of laws for OSTDS, as needed, based on the results of the FDOH study. Wakulla County has an adopted comprehensive plan policy requiring advanced nitrogen reducing onsite systems on parcels of certain sizes. Wakulla County is also proposing to sewer three historical neighborhoods, if funding becomes available, which would remove approximately 2,251 OSTDS that could occur through future development, in addition to the 1,330 OSTDS already in use.

The strategies listed above would help to reduce nitrate loading from future development for a variety of sources. The sufficiency of this BMAP relies on these management strategies.

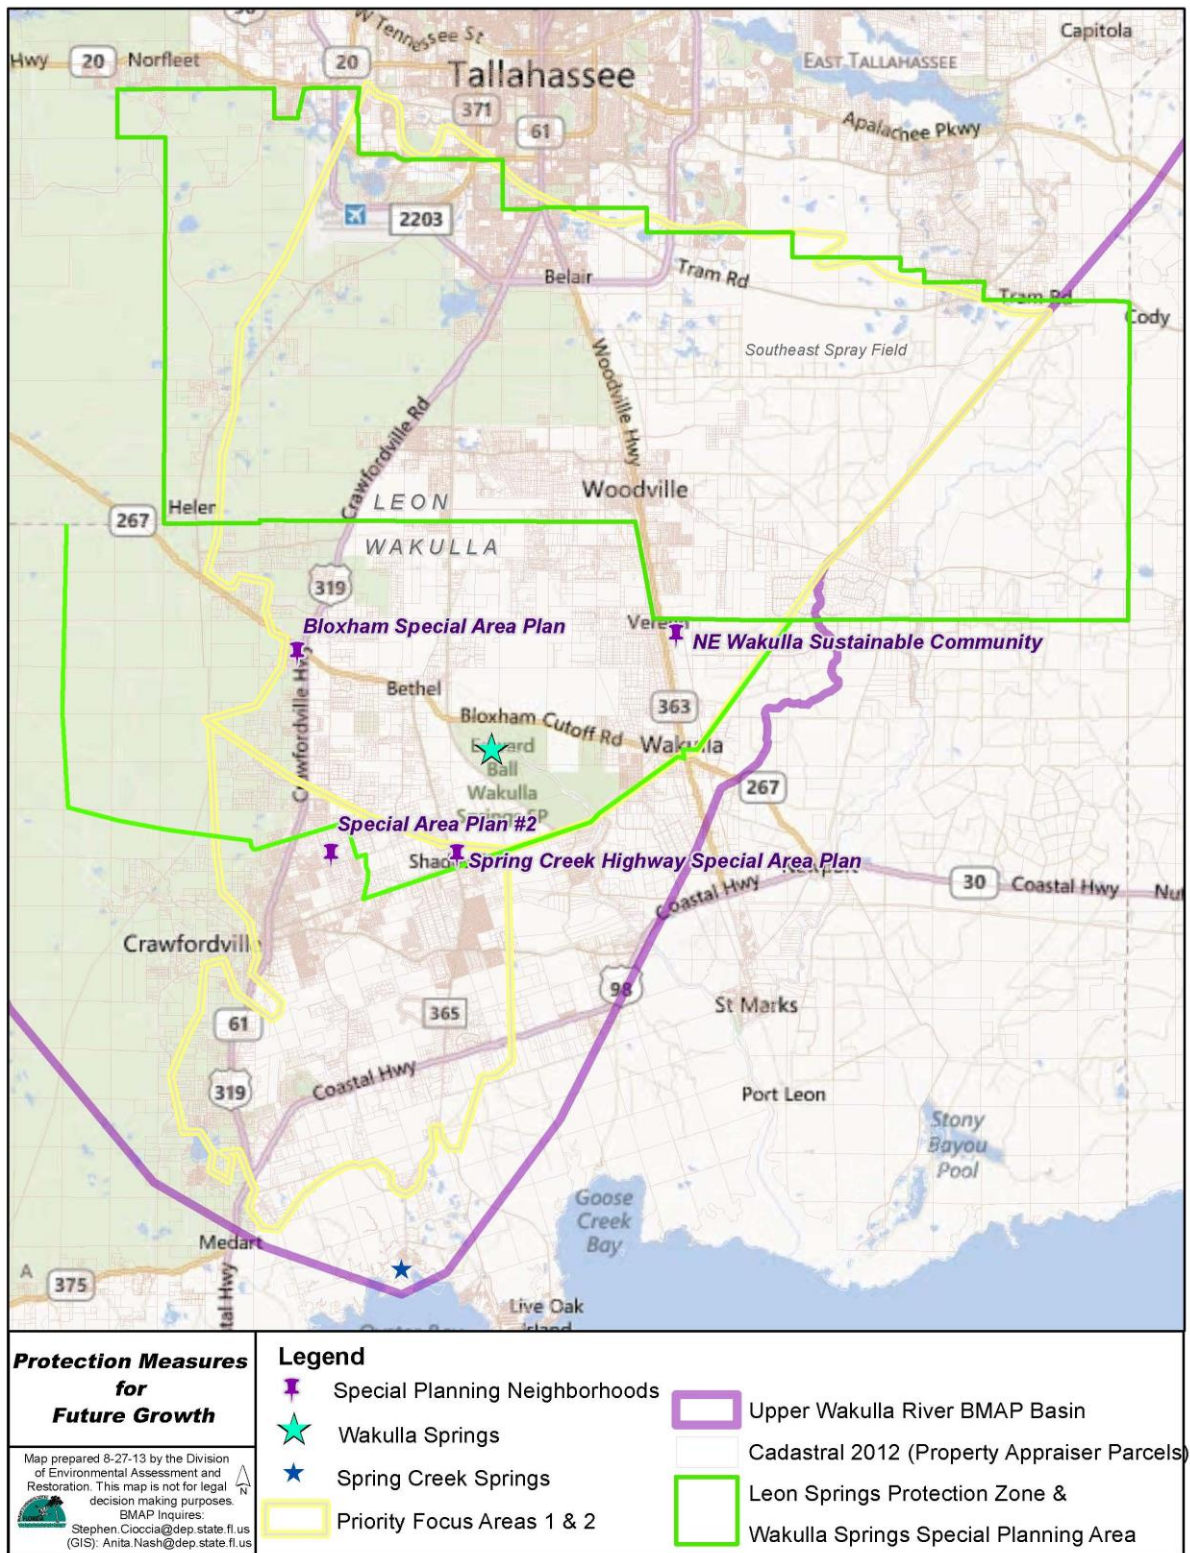


FIGURE 2: PROTECTION MEASURES FOR FUTURE GROWTH

Chapter 2: UPPER WAKULLA RIVER AND WAKULLA SPRINGS BASIN SETTING

2.1 LAND USE COVERAGE

Land cover categories for the Upper Wakulla River and Wakulla Springs Basin were aggregated using the simplified Level 1 codes, which are shown in **Table 5**. Natural lands including upland nonforested, upland forests, water, and wetlands make up 84.1% of the acreage in the basin. Urban land uses including urban and built-up; barren land; and transportation, communication, and utilities makes up 9.1% of the basin. The remaining 6.7% of the basin is agricultural land uses. **Figure 3** shows the distribution of land uses in the Upper Wakulla River and Wakulla Springs Basin.

TABLE 5: 2009 LAND COVER IN THE UPPER WAKULLA RIVER AND WAKULLA SPRINGS BASIN

- = Empty cell/no data

LEVEL 1 LAND COVER CODE	LAND COVER DESCRIPTION	ACRES	% TOTAL
1000	Urban and Built-Up	66,045.7	7.8%
2000	Agriculture	57,105.6	6.7%
3000	Upland Nonforested	51,270.2	6.0%
4000	Upland Forests	449,521.9	53.0%
5000	Water	19,838.5	2.3%
6000	Wetlands	193,613.0	22.8%
7000	Barren Land	806.5	0.1%
8000	Transportation, Communication, and Utilities	10,255.2	1.2%
-	TOTAL	848,456.6	100.0%

Within PFA1, 88.8% of this area is natural lands, 7.9% is urban lands, and 3.4% is agricultural lands, as shown in **Table 6**.

TABLE 6: 2009 LAND COVER IN PFA1

- = Empty cell/no data

LEVEL 1 LAND COVER CODE	LAND COVER DESCRIPTION	ACRES	% TOTAL
1000	Urban and Built-Up	5,435.0	5.3%
2000	Agriculture	3,508.6	3.4%
3000	Upland Nonforested	9,294.4	9.0%
4000	Upland Forests	73,194.9	70.8%
5000	Water	918.9	0.9%
6000	Wetlands	8,318.7	8.1%
7000	Barren Land	179.9	0.2%
8000	Transportation, Communication, and Utilities	2,476.9	2.4%
-	TOTAL	103,327.3	100.0%

Within PFA2, 77.6% of this area is natural lands, 15.3% is urban lands, and 7.0% is agricultural lands as shown in **Table 7**.

TABLE 7: 2009 LAND COVER IN PFA2

- = Empty cell/no data

LEVEL 1 LAND COVER CODE	LAND COVER DESCRIPTION	ACRES	% TOTAL
1000	Urban and Built-Up	4,285.7	14.4%
2000	Agriculture	2,095.9	7.0%
3000	Upland Nonforested	2,477.1	8.3%
4000	Upland Forests	17,510.1	58.9%
5000	Water	161.1	0.5%
6000	Wetlands	2,956.2	9.9%
7000	Barren Land	47.3	0.2%
8000	Transportation, Communication, and Utilities	207.6	0.7%
-	TOTAL	29,741.0	100.0%

For the portion of the basin outside of the PFAs, 83.8% is natural lands, 9.1% is urban lands, and 7.2% is agricultural lands as shown in **Table 8**.

TABLE 8: 2009 LAND COVER IN THE BASIN OUTSIDE OF THE PFAs

- = Empty cell/no data

LEVEL 1 LAND COVER CODE	LAND COVER DESCRIPTION	ACRES	% TOTAL
1000	Urban and Built-Up	56,325.0	7.9%
2000	Agriculture	51,501.1	7.2%
3000	Upland Nonforested	39,498.7	5.5%
4000	Upland Forests	358,816.9	50.2%
5000	Water	18,758.5	2.6%
6000	Wetlands	182,338.1	25.5%
7000	Barren Land	579.3	0.1%
8000	Transportation, Communication, and Utilities	7,570.7	1.1%
-	TOTAL	715,388.3	100.0%

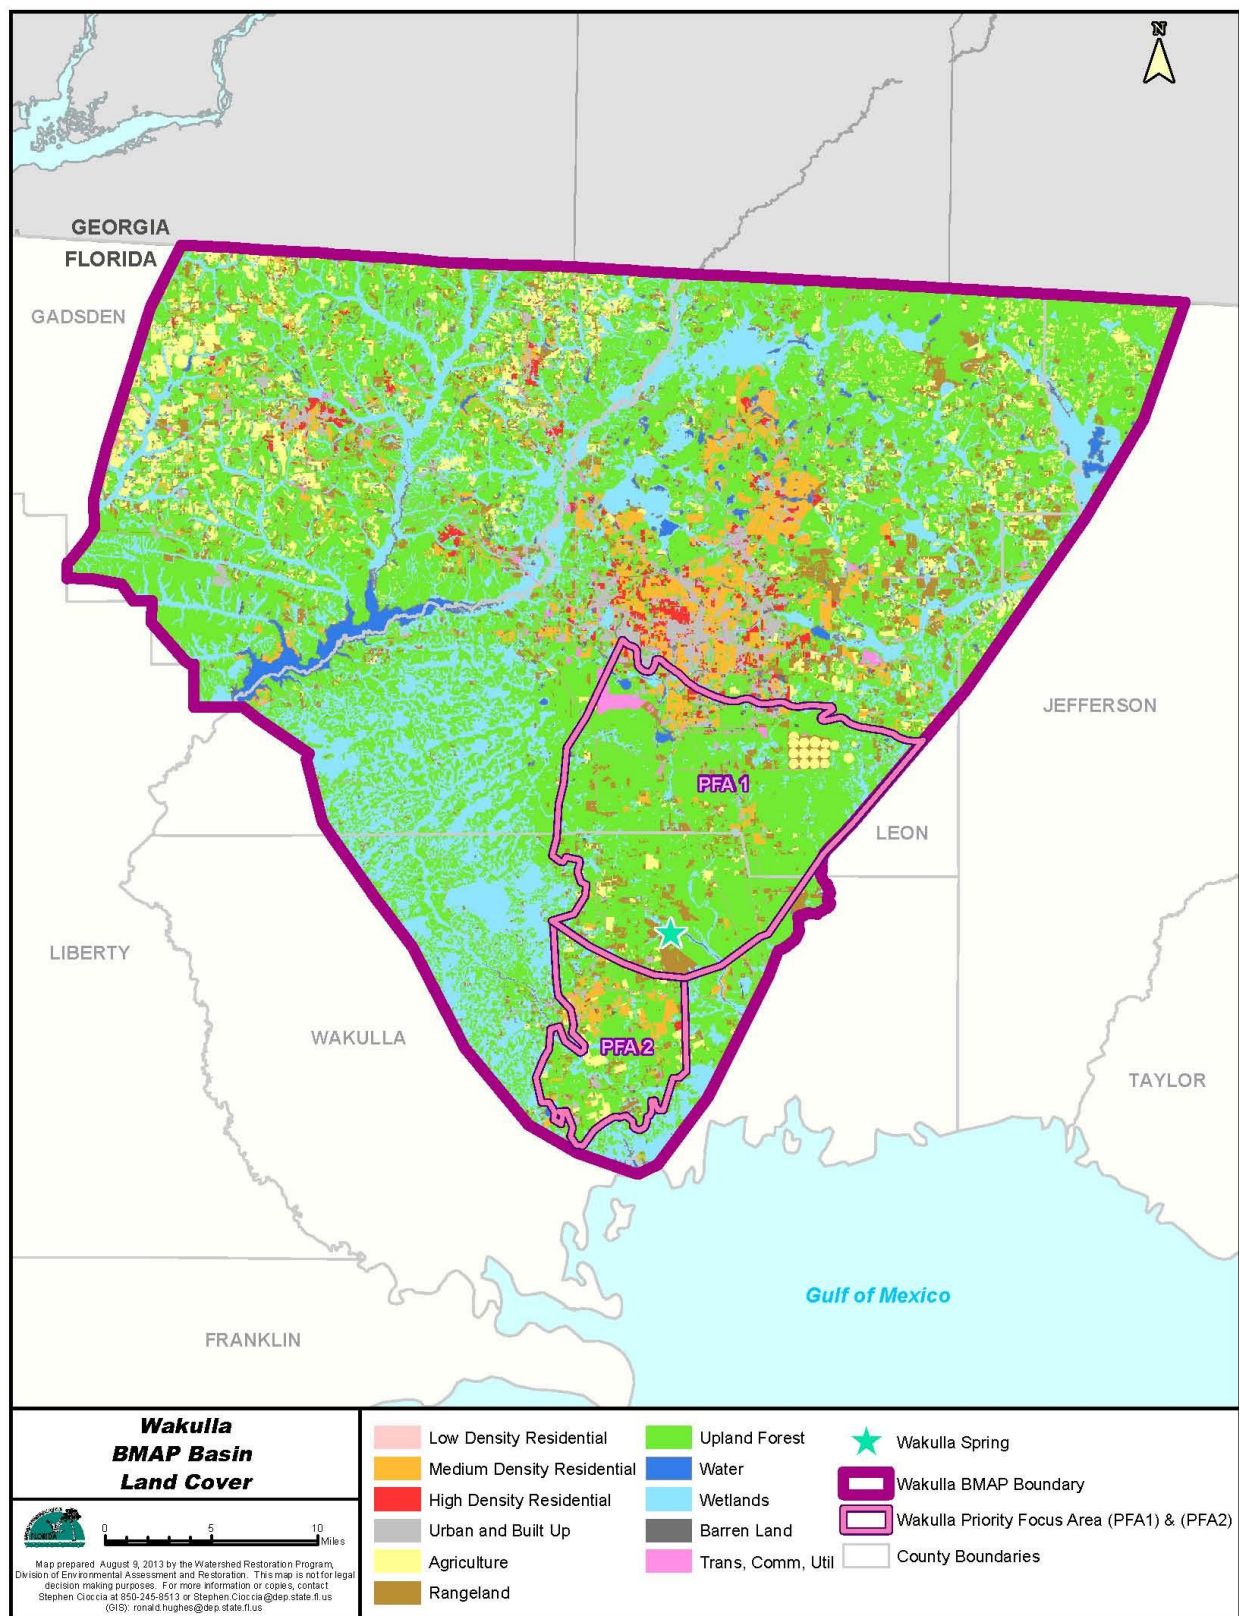


FIGURE 3: 2004 LAND COVER IN THE UPPER WAKULLA RIVER AND WAKULLA SPRINGS BASIN

2.2 HYDROLOGY

In the Wakulla springshed, ground water occurs primarily in the Floridan aquifer, which is a vast carbonate aquifer system that is present throughout virtually all of Florida, as well as southern parts of Alabama and Georgia. The Floridan is the source of water for potable supply, irrigation, and industrial uses throughout most of the region. Wakulla Springs, located within the Ocala Karst District of the Woodville Karst Plain, is the primary source of the Wakulla River. Within the Wakulla River watershed, the Cody Scarp generally separates the semi-confined and unconfined geologic areas. In the most northern portion of the Wakulla springshed, the Floridan aquifer is confined by a thick overburden of sediment and/or clay that helps to protect against contamination. Moving southward, breaches are present in the confining layer, mainly sinkholes, which provide pathways for recharge and the introduction of contaminants. The unconfined or poorly confined regions of the Floridan aquifer (regions with less than 25 feet of sediment cover) extend slightly north of the Cody Scarp into the southern part of the City of Tallahassee urban area and southward towards the Gulf Coast.

This southern portion of the springshed is within the Woodville Karst Plain, which is part of the Gulf Coastal Lowland physiographic region. It extends from the southern edge of the City of Tallahassee to the Gulf of Mexico, in southeastern Leon County and eastern Wakulla County. Its northern border, the Cody Scarp, formed about 100,000 years when ocean levels rose. Capped by less than 20 feet of quartz sands, the Woodville Karst Plain gently slopes toward the Gulf. The porous sands allow water to move rapidly to the underlying soluble carbonates (limestone) that are present at or near the land surface, recharging the Floridan aquifer in the area. Over time, this acidic water has dissolved the limestone, resulting in karst terrain characterized by abundant springs, sinks, sinking streams, karst windows (collapsed segments of underground streams), swallets (caves or holes that swallow a stream), and dolines (collapsed caves), as well as a well-developed system of tunnels or conduits.

These features result in areas where the ground water has direct access from the surface (sinkholes) and surface waters whose pathways often flow beneath the sand and limestone surface layer (sinking streams) merging with the ground water. The karst sub-surface is also characterized by expansive areas of extremely porous formations, due to this limestone surface layer dissolution. This results in a large and extensive cave system and tunnel/conduit network which provide direct pathways and allows short travel times of surface runoff through ground water to the spring vent at the headwaters of the Wakulla River (Peer Review Committee 2005). As reported by Kincaid (2010), the efforts of numerous

underwater cave explorers and scientists have identified a complex system of ground water conduits that interconnect many of the sinking streams in the watershed, as well as the City of Tallahassee SESF to the Wakulla River and Wakulla Springs. The BMAP PFAs represent the areas in the basin where the aquifer is most vulnerable to pollutant inputs, where there are the fastest ground water travel times, and where there is a known connectivity between ground water pathways and Wakulla Springs (refer to **Section 1.3.1.1**).

The Floridan aquifer generally flows in a southerly direction under the watershed to outflow from Wakulla Springs, Spring Creek Springs, the Lower St. Marks River, and the Gulf of Mexico. Ground water flow is increased by contributions from local rainfall and sinking streams. Data from potentiometric maps indicate that the steepest hydraulic gradient is just below the Cody Scarp and slowly declines towards the Gulf of Mexico. Wakulla Springs sits in the center of a zone of high hydraulic movement with lowered potentiometric surface that funnels water to Wakulla Springs. Therefore, small increases in the local hydraulic head resulting from short-term, intensive rainfall events should result in a significant increase in spring discharge.

Observations of unusually high and low tides in Wakulla Springs along with tracer tests led to the conclusion that flow from the Spring Creek Springs Group can travel either to Spring Creek Springs or to Wakulla Springs, depending on the hydraulic conditions at either site. Therefore, when the water level at Spring Creek Springs is higher than the level at Wakulla Springs (as observed during an abnormally high tide), the Spring Creek Springs Group will flow to Wakulla Springs. When the reverse is true, (as observed during an abnormally low tide) Spring Creek Springs will receive the flow. During more neutral conditions, the flow will split between the two outlets. A variety of other factors, such as vegetation restricting flow in the Wakulla River and saltwater intrusion can create fluctuation in the relative water levels of the two springs, which in turn will affect the fraction of the Springs Creek Springs Group discharge that flows to Wakulla Springs (Lombardo 2011). This bi-phasic nature of the spring discharge volume and area the water is drawn from makes it difficult to determine the nitrate loading from different sources in the basin.

Springs provide the majority of the flow in the Wakulla River. The Wakulla River is about nine miles long, starting near Camp Indian Springs and joining the St. Marks River near Fort San Marcos. Major centers of population within the basin include the City of Tallahassee, Woodville, and Crawfordville.

The Wakulla River from Wakulla Springs downstream is tidally affected. The potential for saltwater intrusion into the ground water system exists, as the Floridan aquifer is directly connected to the Gulf of Mexico (Department 2012a).

2.3 WATER QUALITY AND BIOLOGICAL COMMUNITY TRENDS

The Upper Wakulla River was determined to be impaired based on failing SCI scores between February 2000 and May 2007. The poor biological community scores were due to the fact that sensitive taxa was affected by the smothering of substrate by hydrilla, occasional low dissolved oxygen, and slightly elevated conductivity. The water quality data collected during this time found that ammonia levels (mostly below detection) and phosphorus levels (averaging 0.03 mg/L) generally represent excellent conditions, while nitrate concentrations are elevated from anthropogenic sources. Therefore, the Upper Wakulla River was determined to be impaired for nitrates, as evidenced by an aquatic biological community impacted by excessive hydrilla growth and algal mats (Department 2012a).

The highest nitrate concentration is found at the spring vent, and the nitrate concentration decreases as the water moves down river (refer to **Figure 4**). When comparing the data from the TMDL verified period (2000-2007) to more recent data (2008-2012), the nitrate concentrations at the vent are declining. In the ground water caves and tunnels that feed Wakulla Spring, the nitrate concentrations appear to be higher in the B- and C-Tunnels than in the Main Tunnel, which indicates that there are other sources of flow to the springs that are diluting the concentrations observed at the spring vent (refer to **Figure 5**). The data from K-Tunnel (see location in **Figure 6**) indicate lower nitrate levels and may be diluting flows from the other tunnels. The B-, C-, D-, and K-Tunnels continue to show mean nitrate + nitrite concentrations above the target concentration of 0.35 mg/L. The B-, C-, and D-Tunnels are the major contributors (see **Figure 7**), with the highest mean nitrate concentration in B-Tunnel. These tunnels bring contributing flows from the SESF and Ames Sink to the Upper Wakulla River and Wakulla Springs. However, there are declining trends in nitrate concentrations in the B-, C-, and D-Tunnels. The K-Tunnel nitrate concentrations are unchanged, but are lower overall than the other tunnels (Department 2013d).

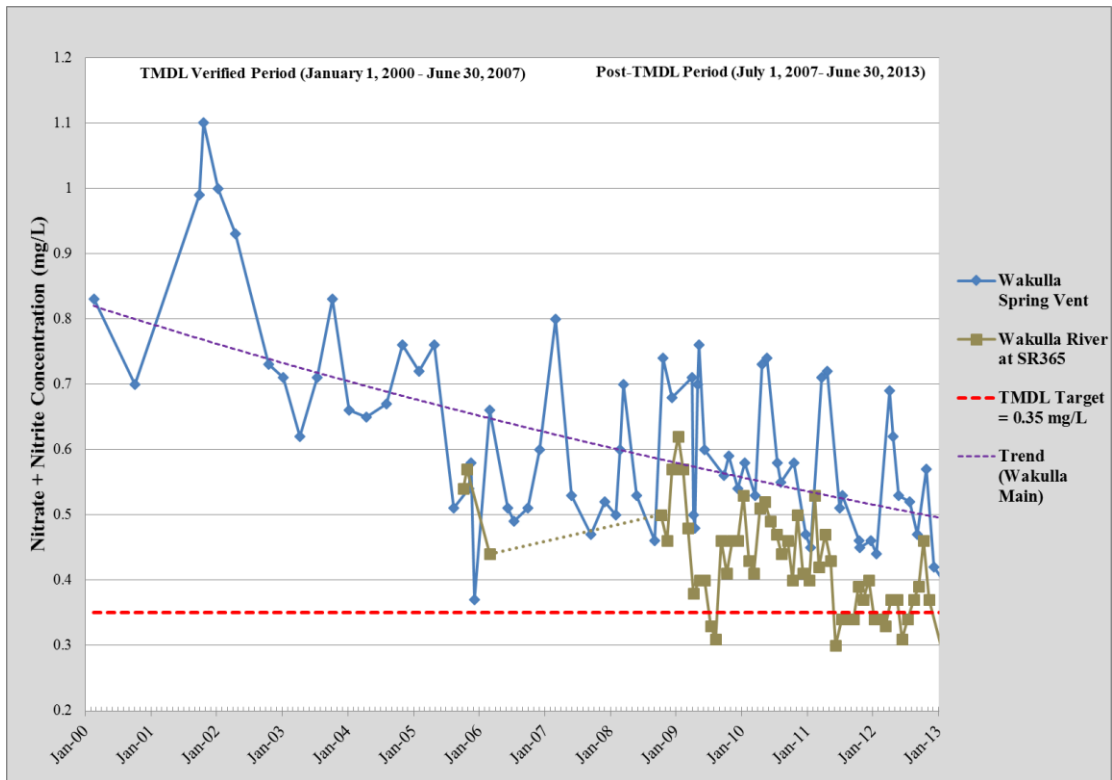


FIGURE 4: NITRATE-NITRITE WATER QUALITY TRENDS IN THE WAKULLA RIVER AND WAKULLA SPRING VENT

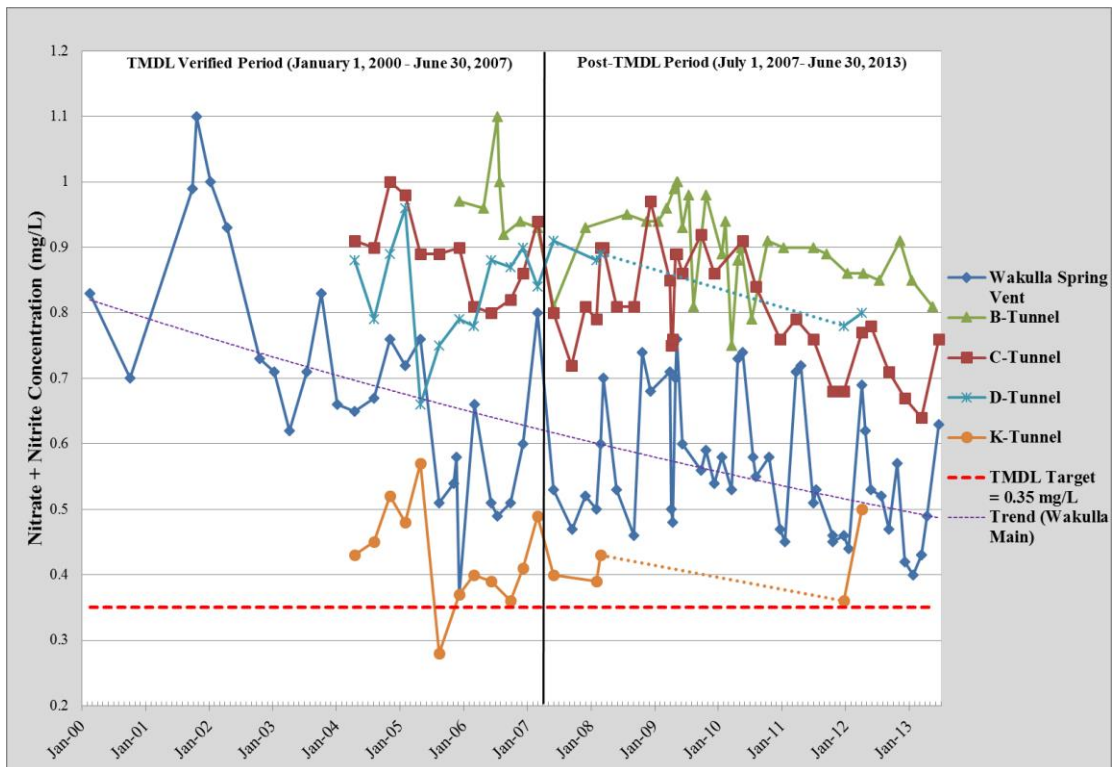


FIGURE 5: NITRATE-NITRITE WATER QUALITY TRENDS IN THE WAKULLA SPRINGS TUNNELS

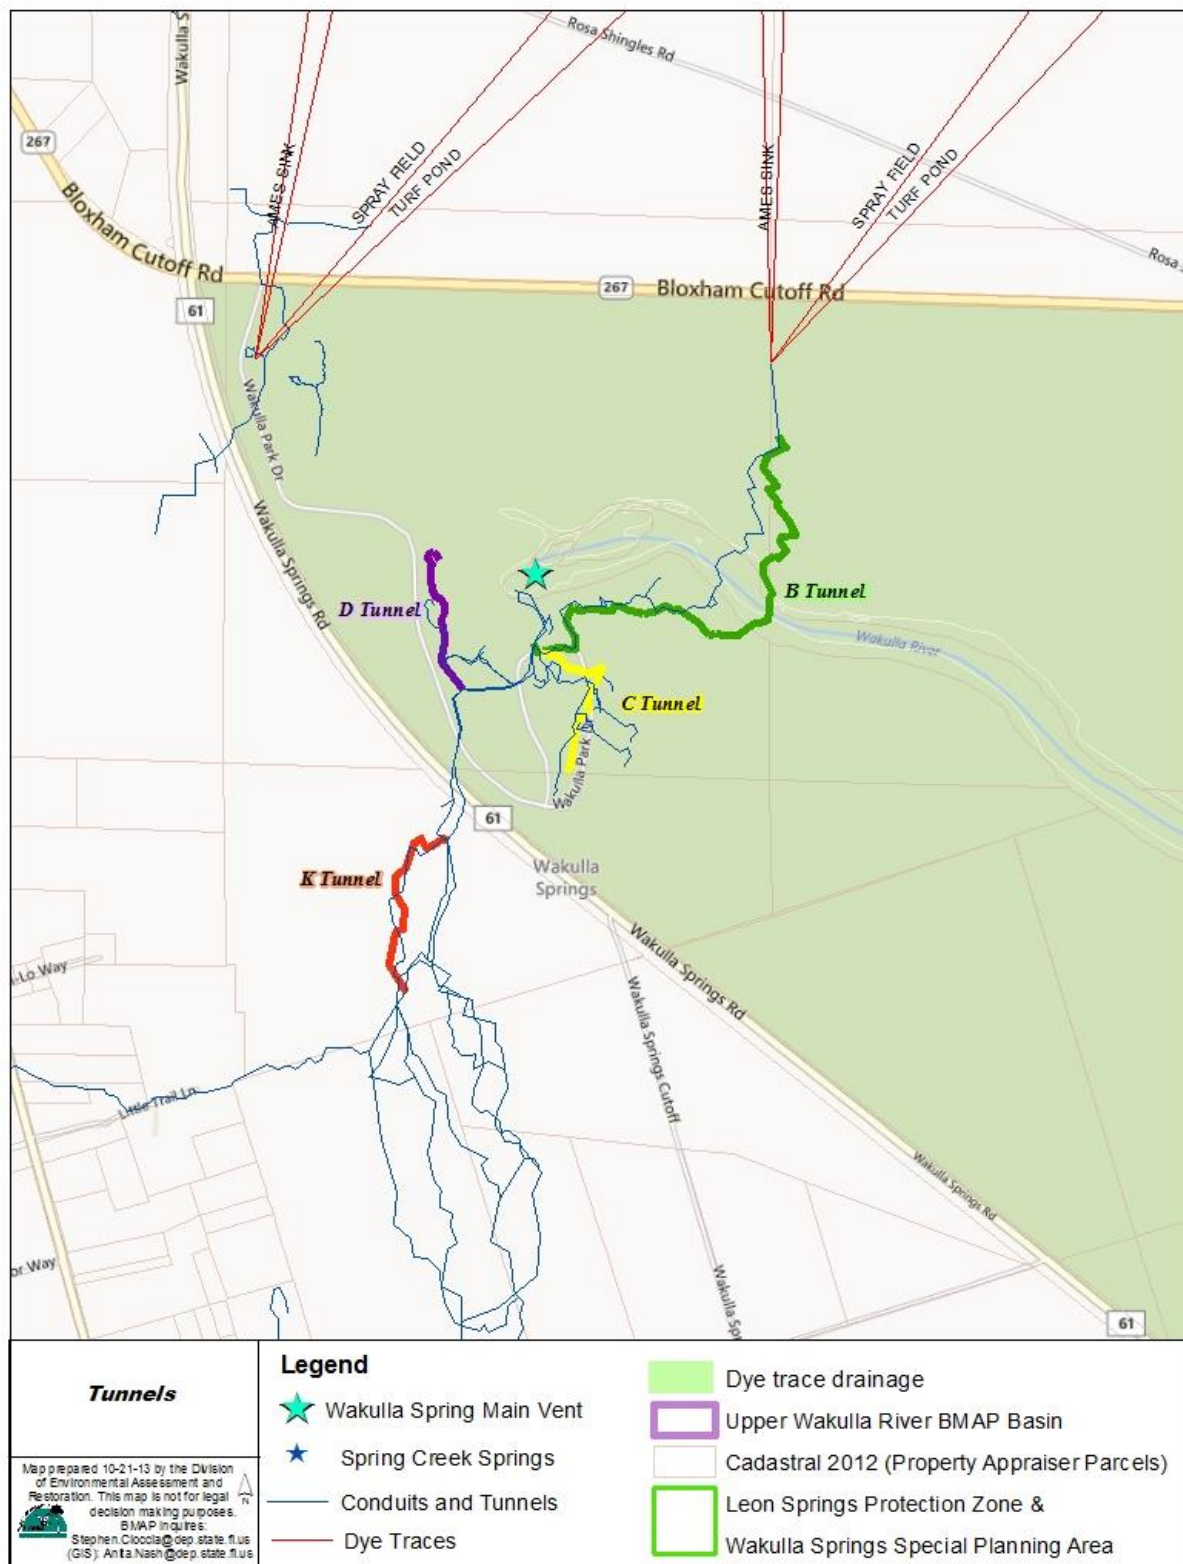


FIGURE 6: LOCATIONS OF THE MAIN WAKULLA SPRINGS TUNNELS

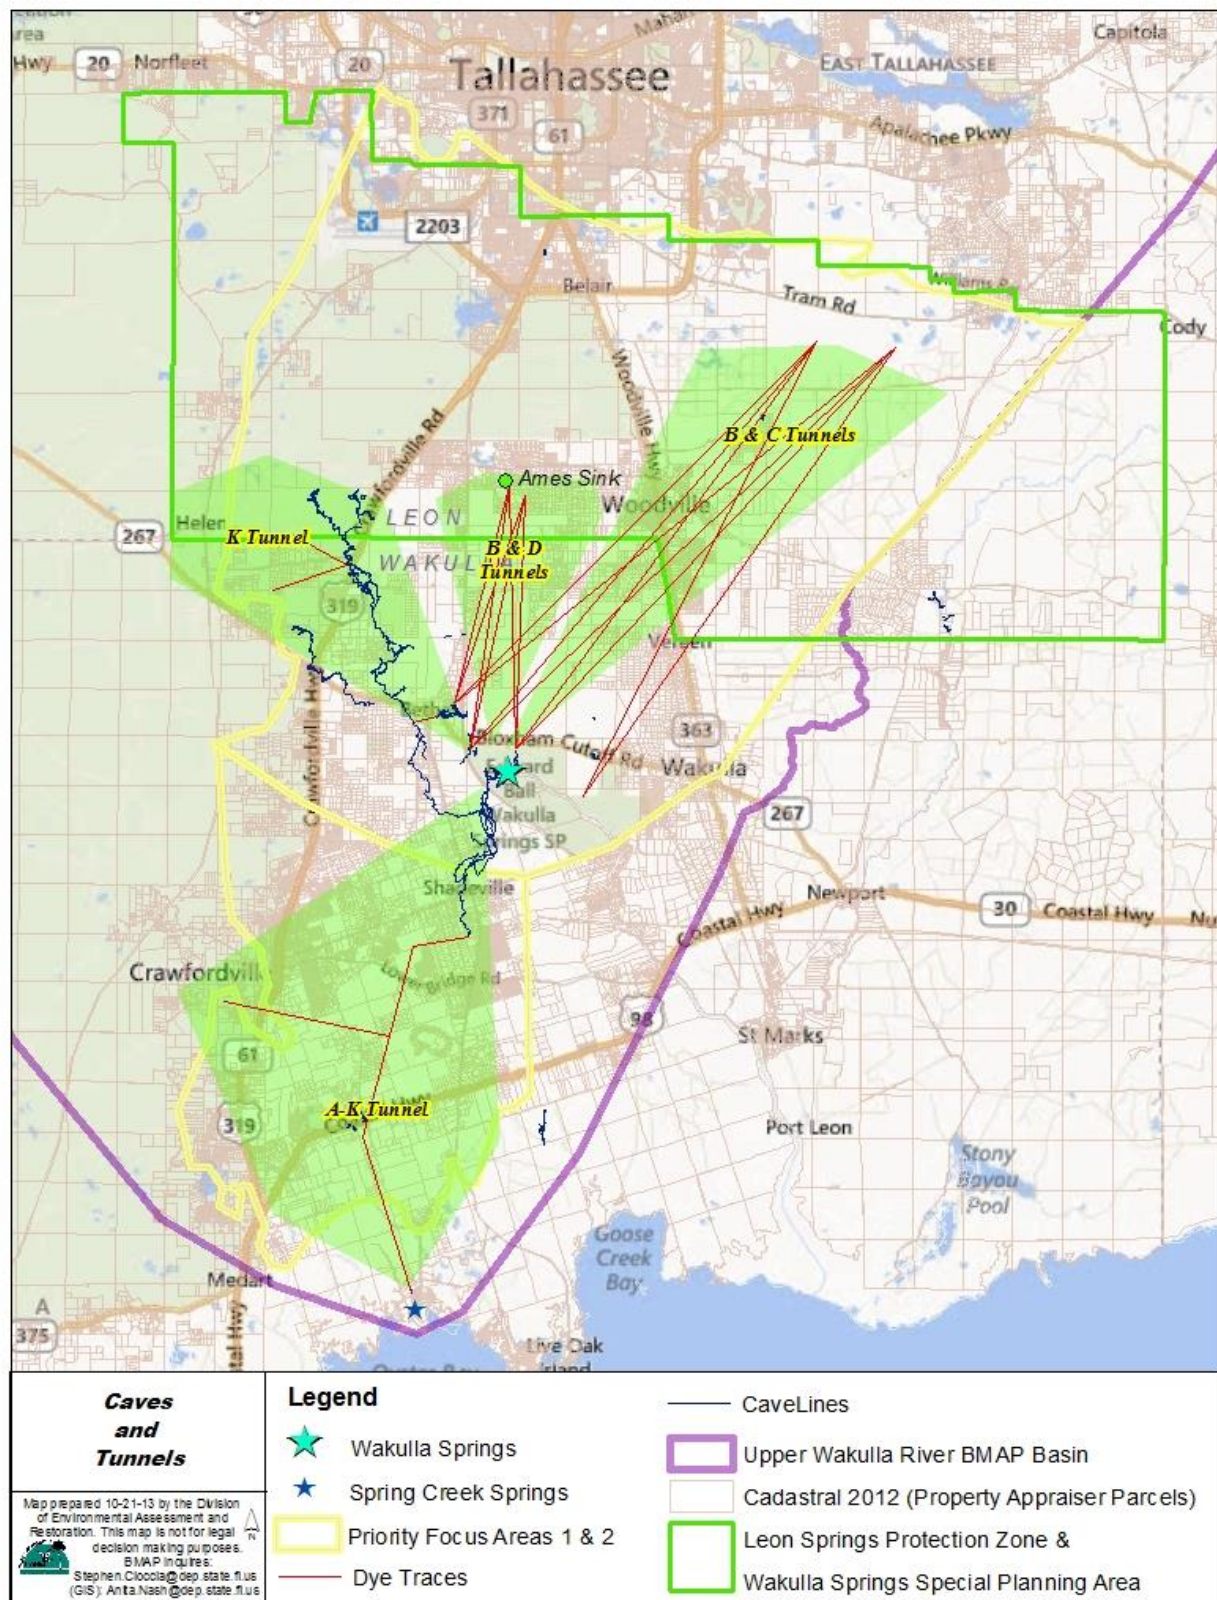


FIGURE 7: RELATIVE NITRATE CONTRIBUTIONS IN THE MAIN WAKULLA SPRINGS TUNNELS

The SCI evaluation that occurred in 2004 in the Upper Wakulla River had score that was categorized as “very poor.” In 2007, the SCI score was categorized as “poor.” While there seems to be a slight improving trend in biological conditions, the overall quality is still poor. In April 2012, a rapid periphyton survey (RPS) was conducted in the Upper Wakulla River. This survey found that 75% of the points assessed had a rank of greater than four for algal coverage, which indicates visible filamentous algae. Additional samples are needed to confirm the results of this survey. There was also a RPS sample from below Highway 98, which was collected on April 2012; however, this site is located in the extreme downstream portion of the Wakulla River. The results of this RPS were that 40% of the points assessed had a rank of four or higher, which indicates visible filamentous algae (Department 2013b).

To determine the source of the nitrate loading in the basin, the Department collected data in March through December 2011 from the different tunnels around Wakulla Springs and from the springs themselves. Using information on nitrogen isotopes to correlate to sources, the data indicated that A-K- and K-Tunnels in the south and west have a much lower wastewater signature than the B-, C-, and D-Tunnels in the north and east. The springs are also showing a significant wastewater nitrate signature. These data had a nitrogen isotope signature in the wastewater/manure signature field (Department 2013c).

To determine if the nitrate is coming from humans or livestock, another tracer is needed. The Department uses sucralose as a tracer for human sources. Sucralose is the main ingredient in Splenda, and studies from around the world have detected sucralose in ground water with human wastewater influences. Sucralose is very stable, passes through the wastewater treatment into the final effluent, and is not affected by chlorination or tertiary-grade treatment. Sucralose has the added advantage that it is never used in animal feed and is therefore not expected to be present in the byproducts of animal waste. The median sucralose levels in the tunnels, based on data from 2011-2012, the A-K- and K-Tunnels were only slightly above the detection limit, which is 0.01 parts per billion (ppb). The B-, C-, and D-Tunnels had a sucralose concentrations between 0.033 ppb and 0.035 ppb, which indicates a human influence coming from the north and east. This is consistent with findings from other studies in the basin (Department 2013c).

2.4 THE IMPACT OF NITRATE ON WATER QUALITY AND THE BIOLOGICAL COMMUNITY

It appears that nitrate is the crucial nutrient feeding the growth of algae and hydrilla in the Upper Wakulla Springs and Wakulla River. Nitrate is a common form of combined nitrogen in most natural surface freshwaters and some ground water in Florida. Nitrate occurs naturally but is also produced by human activities. Most plants cannot directly use nitrogen in its molecular form, but instead use nitrogen in the form of either nitrate or ammonium. The primary natural sources of nitrate on the earth's surface include volcanic activity, lightning, and biological fixation. In biological fixation, molecular nitrogen is fixed by a special bacterium associated with certain plants, most notably legumes, sugarcane, and some ferns, and may be further oxidized to nitrate by other bacteria. Nitrate is also produced from the breakdown of animal manure and dead plants (Peer Review Committee 2005).

Human activities are greatly increasing the amount of nitrogen cycling between the living world and the soil, water, and atmosphere. In fact, humans have already doubled the rate of nitrogen entering the land-based nitrogen cycle, and that rate is continuing to climb. Elevated concentrations of nitrate in ground water commonly result from agricultural and urban land use practices in ground water recharge areas. The proximity of these areas to points of discharge (i.e., springs) can result in elevated nitrate levels in surface waters. Nitrate ions are mobile in ground water and surface water. There are essentially no solubility constraints on the amounts found in ground water because the nitrate ion does not sorb to soils or rock, and thus nitrate can move freely through the soil and the ground water system. In surface waters, nitrate acts as a fertilizer for aquatic plants. Nitrate levels much less than 1 mg/L can cause a significant shift in the balance of springs' ecological communities. With an overly abundant supply of nutrients, aquatic plants and algae grow rapidly, filling the water with thick masses of green vegetation. Oxygen in the water is used up, leading to negative impacts to the aquatic community (Peer Review Committee 2005).

Increasing nitrate levels in the Floridan aquifer in the Woodville Karst Plain in Leon and Wakulla Counties, as well as in water emanating from Wakulla Springs, are a significant ecological concern. Because a spring is a discharge point, the quality of spring water can be considered characteristic of a large cross-section of the aquifer. An increase in nitrate concentration in Wakulla Springs can be interpreted either as a widespread increase in nitrate concentration in the ground water from a large area of the aquifer (resulting, for example, from septic systems) or as a significant increase in one or a few

specific inputs (such as a WWTF). Nitrate sources for Wakulla Springs appear to be a combination of both types. **Figure 8** illustrates the sources, reservoirs, and pathways of nitrogen in the unconfined portion of the Wakulla springshed. Under a thin veneer of sand, is a limestone matrix, the voids of which are saturated with ground water below the water table. The horizontal striping indicates the water-filled conduit that conveys water and pollutants to Wakulla Springs. The large checkered arrow denotes stormwater and sinking streams. Inputs of nitrate consist of atmospheric deposition, fertilizers, septic systems, land spraying, and residuals. Reservoirs consist of soils, vegetation, and livestock. Sinks of nitrogen (not illustrated) include the harvesting and decay of vegetation and removal of livestock. The nitrogen that enters ground water finds its way to Wakulla Springs (Peer Review Committee 2005).

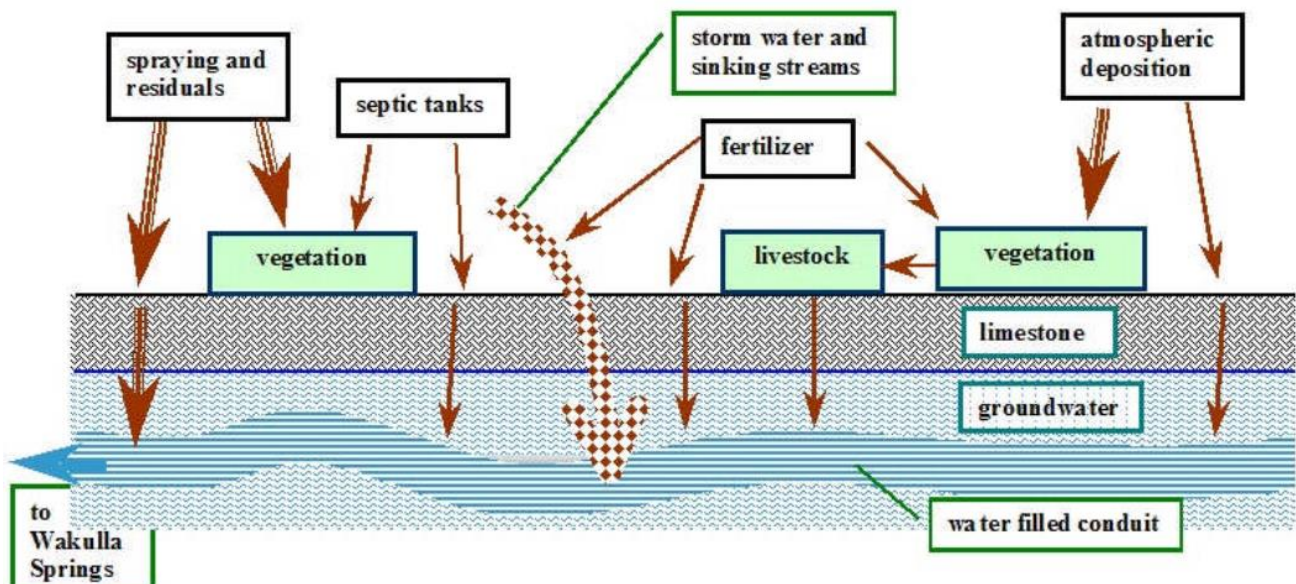


FIGURE 8: SCHEMATIC OF SOURCES, RESERVOIRS, AND PATHWAYS OF NITROGEN IN THE UNCONFINED PORTION OF THE WAKULLA SPRINGSHED

Chapter 3: POLLUTANT SOURCES AND ANTICIPATED OUTCOMES

3.1 SUMMARY OF SOURCES IN THE BASIN

The TMDL includes estimates of nitrate loading in the Upper Wakulla River and Wakulla Springs Basin from WWTFs, OSTDS, fertilizer, livestock, atmospheric deposition, sinking streams, and stormwater. Atmospheric deposition is considered a mostly uncontrollable source; therefore, the TMDL did not require reductions from this source. The contributions from sinking streams, including Munson Slough, Fisher Creek, Black Creek, and Lost Creek, were minimal and thought to be temporary in response to large rainfall events (Chelette et al. 2002). Therefore, the BMAP focuses on addressing nitrate loading from WWTFs, OSTDS, fertilizer, livestock, and stormwater. Additional details about the sources included in this BMAP are provided in the subsections below.

3.1.1 WWTFs

During the TMDL period, the largest WWTF load was the City of Tallahassee's T.P. Smith Water Reclamation Facility and spray field, which are located within PFA1. In November 2012, the City of Tallahassee completed an upgrade to the WWTF, which resulted in large reductions of TN from the effluent applied to the land's surface at the spray field (refer to **Section 4.1.1** for additional details). In addition, the city removed biosolids application in the basin (see **Section 4.1.1**), which further reduced the impacts of the WWTF in the basin.

Also, located within PFA1 are four, smaller WWTFs (**Table 9** and **Figure 9**). During the first BMAP iteration, the Department will work with existing WWTFs in PFA1 to determine if any reductions are required to help address the Upper Wakulla River impairment (refer to **Section 4.1.1** for more details).

TABLE 9: WASTEWATER TREATMENT FACILITIES IN PFA1

FACILITY	PERMIT NUMBER	DESIGN CAPACITY (MILLION GALLONS PER DAY)	DISPOSAL METHOD
T.P. Smith Water Reclamation Facility	FLA010139	27.5	Spray field
Woodville Elementary School	FLA010136	0.01	Rapid infiltration basin
DISC Village	FLA010137	0.03	Spray field
Winco Utilities, Inc.	FLA016544	0.495	Spray field
Lake Bradford Estates	FLA010148	0.043	Absorption beds

In 1995, the U.S. Environmental Protection Agency (EPA) authorized the Department to implement the NPDES Program to permit wastewater discharges to state surface water, including industrial and

domestic wastewater facilities. Permits are issued under the applicable provisions of Chapter 403, F.S., and appropriate rules in Chapter 62-600, F.A.C., with applicable sections of 40 Code of Federal Regulations incorporated by reference. These regulations, rules, and statutes give the Department the authority to regulate domestic and industrial wastewater facilities. For those entities that have WWTF strategies within the PFAs, if they fail to implement their approved list of strategies in the BMAP they will be subject to the appropriate enforcement actions as outlined in 40 Code of Federal Regulations 123.45, as well as Sections 403.061, 403.121, and 403.161, F.S., and Rule 62-650.300(4), F.A.C.

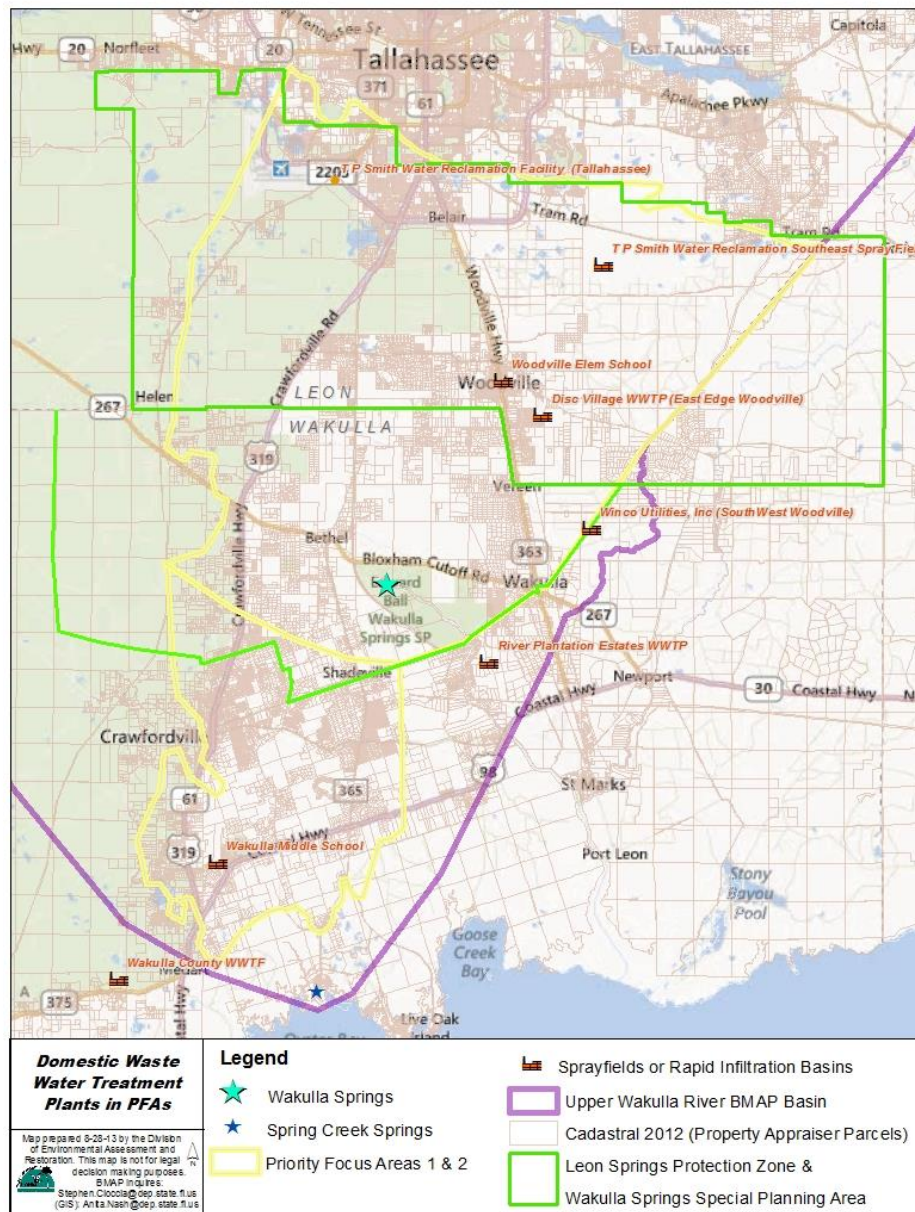


FIGURE 9: DOMESTIC WASTEWATER TREATMENT PLANTS AND FACILITIES IN THE PFAs

3.1.2 OSTDS

OSTDS, or septic systems, are commonly used where central sewer does not exist. When properly sited, designed, constructed, maintained, and operated, OSTDS are a safe means of disposing of domestic waste (Department 2012a). However, in karst areas, such as the PFAs in the Upper Wakulla River and Wakulla Springs Basin, the nitrate contributions from OSTDS to ground water can be significant. A septic system study was conducted by FSU's Department of Earth, Ocean, and Atmospheric Science in the Woodville area, which is located in southern Leon County and northern Wakulla County (Harden et al. 2010). FSU researchers injected a dye into two shallow wells, and then samples were collected at several springs and Wakulla tunnels. Dye was recovered in Wakulla Spring, Sally Ward Spring, Indian Springs, and the six tunnels. Based on the distances from the two wells (5.2 and 6.0 miles) to Wakulla Springs, the dye traveled at a rate of about 327 feet (100 meters) per day (Department 2012b).

Based on the 2009 FDOH coverage of OSTDS, there are approximately 3,867 septic tanks in PFA1 and 1,802 septic tanks in PFA2 (see **Figure 10**). In addition, 40,846 septic tanks are located within the basin, but outside of the PFAs. With the reduction in loading from the City of Tallahassee WWTF, OSTDS are now the largest source of nitrates to the ground water contributing more than one-third of the estimated loading (Department 2013a). Strategies to address the OSTDS loading will be determined through the OSTDS Initiative (refer to **Section 1.3.4**).

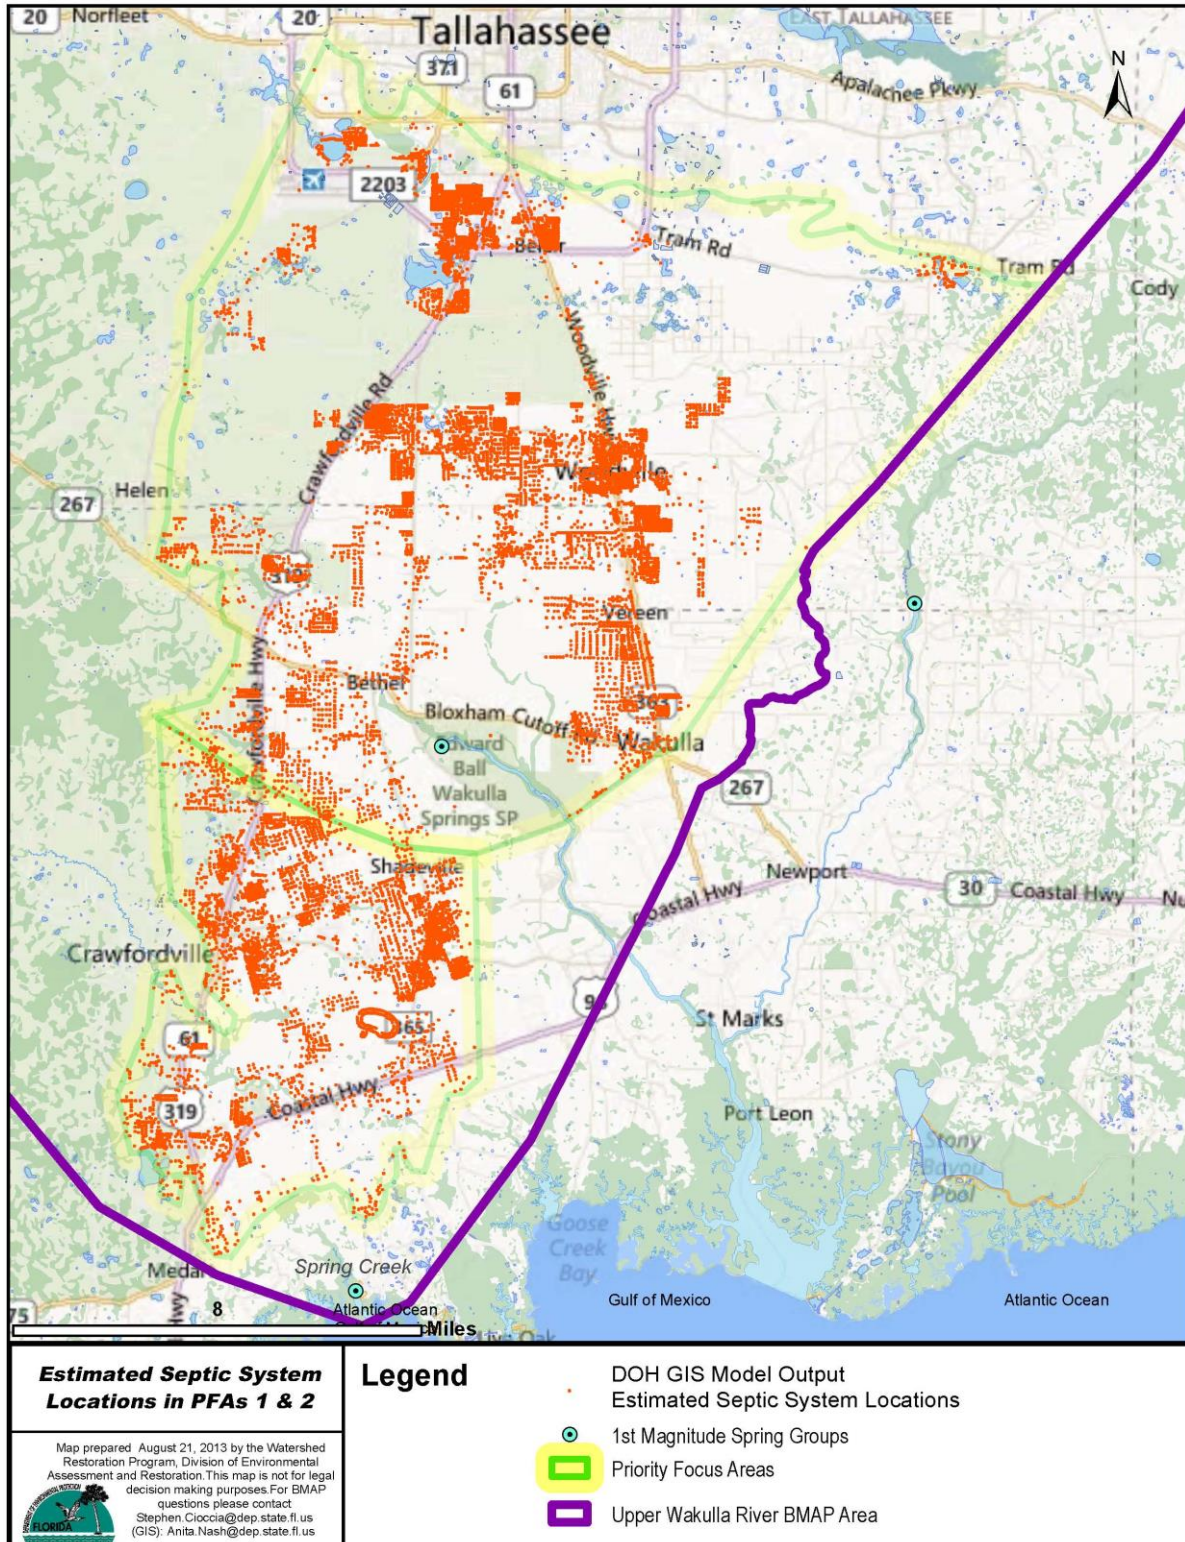


FIGURE 10: CURRENT LOCATIONS OF OSTDS IN THE PFAS

3.1.3 RESIDENTIAL FERTILIZER

Fertilizer used on lawns and landscaping in residential areas can contribute to the nitrate loading in the ground water if over applied. It is estimated that residential fertilizer contributes about 7% of the nitrate loading in the basin (Department 2013a). Leon County, Wakulla County, and City of Tallahassee have fertilizer ordinances and education programs to help address this source (refer to **Chapter 4**).

3.1.4 AGRICULTURAL FERTILIZER AND LIVESTOCK

The City of Tallahassee implemented management practice changes during the TMDL period to eliminate the application of fertilizer on the SESF, where crops are grown. This change in management practice resulted in another significant reduction in TN being applied in the basin.

Based on the 2009 land cover, non-forestry agriculture makes up about 4% of the acreage within the PFAs (see **Figure 11**). The majority of the agriculture within the PFAs is made up of pasture and rangeland, followed by hay fields and field crops. There are also smaller amounts of horse farms, row crops, other grove types, nurseries and vineyards, ornamentals, and tree nurseries. Outside of the PFAs, non-forestry agriculture is about 7% of the acreage, with pasture and rangeland making up the majority of the agricultural lands. Hay fields and row, field, and mixed crops are the next most common types of agriculture. FDACS is working with the producers in the basin to enroll them in the appropriate best management practice (BMP) programs. During this process, FDACS determines whether agricultural operations are appropriate for enrollment, such as those in commercial production. Unimproved pasture with no animals, fallow lands, and other lands not in production would not be enrolled. Lands identified as not in production may result in an agricultural load reduction “credit,” depending on the specific circumstances. The Department and FDACS will work together to identify small residential farms that may be addressed through the University of Florida – Institute of Food and Agricultural Sciences Extension and/or BMPs developed by the Department, such as the small horse-farm BMP manual currently being published. Where FDACS identifies clear errors in land use data, such as golf courses classified as agriculture, the total agricultural acreages estimated for the BMAP basin will decrease by those acres and will be reflected during annual updates.

Agricultural enforcement for BMAP actions is based on the FWRA, which states that nonpoint source dischargers who fail either to implement the appropriate BMPs or conduct water quality monitoring prescribed by the Department or a water management district that demonstrates compliance with water

quality standards may be subject to enforcement action by either of those agencies. All agricultural non-point sources in the BMAP area are statutorily required either to implement FDACS-adopted BMPs or to conduct water quality monitoring that demonstrates compliance with state water quality standards.

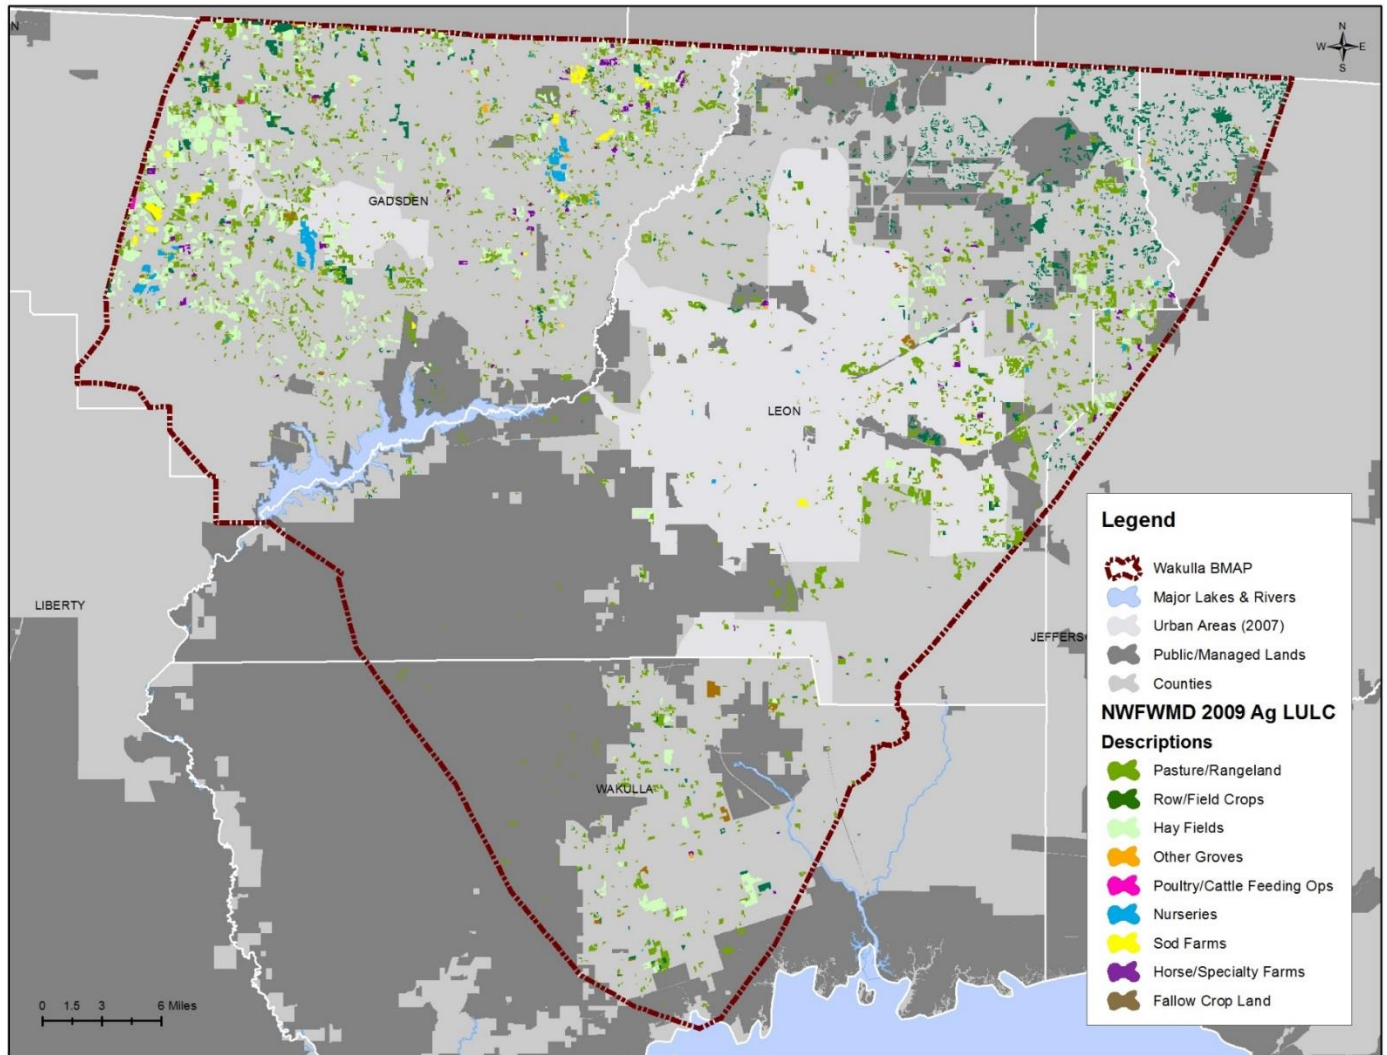


FIGURE 11: 2009 AGRICULTURAL LANDS IN THE UPPER WAKULLA RIVER AND WAKULLA SPRINGS BMAP

3.1.5 STORMWATER

Stormwater runoff is the responsibility of MS4s and urban nonpoint sources, and these entities are described in detail in the subsections below.

3.1.5.1 MS4s

Several of the stakeholders in the basin are regulated by the Florida NPDES stormwater program because they discharge stormwater and qualify as an MS4. While there are no direct contributions from these MS4s to the Upper Wakulla River watershed (WBID 1006), these MS4s are located within the Upper Wakulla River and Wakulla Springs BMAP Basin. An MS4 is a conveyance or system of conveyances such as roads with stormwater systems, municipal streets, catch basins, curbs, gutters, ditches, constructed channels, or storm drains that are designed or used for collecting or conveying stormwater. An MS4 can be operated by municipalities, counties, drainage districts, colleges, military bases, or prisons, to name a few examples. By definition, the components of an MS4 system do not include waters of the state of Florida or of the United States. Instead, the MS4 ultimately discharges into such waters.

The basic requirements of the program serve as a foundation for the stormwater management efforts of these communities. EPA developed the federal NPDES stormwater permitting program in two phases. Phase I, which began in 1990, addresses large and medium MS4s located in incorporated areas and counties with populations of 100,000 or more, as well as specific industrial activities. Phase II, which started in 1999, addresses small MS4s that are designated according to population and other criteria established in federal and state rules. Small MS4s include MS4s located in an urbanized area that have a population of at least 50,000 people and/or serve a population of 1,000 or more people per square mile.

In October 2000, EPA authorized the Department to implement the NPDES stormwater permitting program in the state. This permitting has remained separate from state stormwater/Environmental Resource Permit programs and local stormwater/water quality programs, which have their own regulations and permitting requirements. Florida's rules for MS4s can be found in Rules 62-4, 62-620, 62-621 and 62-624, F.A.C.

Entities in the Upper Wakulla River and Wakulla Springs Basin that are currently designated as MS4s are listed in **Table 10**.

TABLE 10: ENTITIES IN THE UPPER WAKULLA RIVER AND WAKULLA SPRINGS BMAP BASIN DESIGNATED AS MS4S

MS4 PERMIT PHASE	PERMITTEE	PERMIT NUMBER
I	Leon County	FLS000033
I	FDOT District 3	FLS000033

MS4 PERMIT PHASE	PERMITTEE	PERMIT NUMBER
I	City of Tallahassee	FLS000034
II	FSU	FLR04E051
II	FAMU	FLR04E095
II	Federal Correctional Institution, Tallahassee	FLR04E096

All NPDES permits, including MS4 permits, must be consistent with the requirements of adopted TMDLs. Paragraph 403.067(7)(b), F.S., prescribes the criteria for TMDL implementation. In accordance with this section, the implementation of a TMDL or BMAP for holders of NPDES MS4 permits must be achieved to the maximum extent practicable, through the use of BMPs or other management strategies. The implementation of BMPs consistent with the provisions of the stormwater management program required under an MS4 permit constitutes compliance with the standard of reducing pollutants to the maximum extent practicable for discharges to unimpaired waters. However, MS4s must also continue to assess and adjust their list of approved management strategies to achieve the greatest reduction of pollutants practicable to protect receiving waters in accordance with an adopted TMDL or BMAP.

Entities that fail to implement their list of approved strategies in order to reduce pollutants to the maximum extent practicable standard will be subject to enforcement action in accordance with Sections 403.067, 403.121, 403.141, and 403.161, F.S., and Subsection 62-650.300(4), F.A.C. In addition, both Phase I and Phase II MS4 permits include provisions for revising the effluent limitations, monitoring requirements, and stormwater management programs to meet applicable TMDL allocations that are consistent with the assumptions and requirements of the adopted BMAP.

3.1.5.2 Urban Nonpoint Sources

Reductions in loads carried by stormwater that are separate from discharges by a permitted MS4 were established in the “load allocation” component of the TMDL. Paragraph 403.067(7)(b)2.f, F.S., prescribes the pollutant reduction actions required for nonagricultural pollutant sources that are not subject to NPDES permitting. These “non-MS4” sources must also implement the pollutant reduction requirements detailed in a BMAP. The entities that may be responsible for reducing nonpoint sources in the Upper Wakulla River and Wakulla Springs Basin are as follows:

- *Gadsden County.*
- *Jefferson County.*

- *Wakulla County.*
- *City of Gretna.*
- *City of Midway.*
- *City of Quincy.*
- *Town of Havana.*

Failure by a nonpoint source to reduce loadings, as required in a BMAP, can result in enforcement action by the Department under Paragraph 403.067(7)(b)2(h), F.S. The Department can designate an entity as a regulated Phase II MS4 if its discharges are determined to be a significant contributor of pollutants to surface waters of the state in accordance with Section 62-624.800, F.A.C. The designation of an entity as a Phase II MS4 can occur when a TMDL has been adopted for a waterbody or segment into which the entity discharges the pollutant(s) of concern. If an entity is designated as a regulated Phase II MS4, it is subject to the conditions of the Phase II MS4 Generic Permit.

3.2 ANTICIPATED OUTCOMES OF BMAP IMPLEMENTATION

With the implementation of the management strategies outlined in this BMAP, reductions in the nutrient loads to the Upper Wakulla River and Wakulla Springs Basin are expected to decrease the contribution of nitrate to the river and springs. The following outcomes are expected from BMAP implementation:

- *Continued improvement in the water quality conditions in the Upper Wakulla River and Wakulla Springs.*
- *Decreased loading of the target pollutant (nitrate).*
- *Increased coordination, such as through the OSTDS Initiative and annual meetings, among state and local governments and within divisions of local governments in problem solving for water quality restoration.*
- *Determination of effective management strategies through the stakeholder decision-making and priority-setting processes.*
- *Enhanced public awareness of pollutant sources, pollutant impacts on water quality, and corresponding corrective actions.*
- *Enhanced understanding of basin hydrology, water quality, and pollutant sources.*

Chapter 4: MANAGEMENT STRATEGIES WITHIN THE PFAS

“Management strategies” refer to the suite of activities that the responsible Upper Wakulla River and Wakulla Spring BMAP entities will be conducting to achieve nitrate reductions. These strategies include structural and nonstructural activities. Under Section 403.067(7)(a), F.S., a BMAP is required to integrate the appropriate management strategies available to the state through existing water quality protection programs to achieve the TMDLs. In the case of this BMAP, management strategies relate to standards for WWTFs, a process to address OSTDS, residential fertilizer use, agricultural BMPs, and management of stormwater.

The stakeholders submitted strategies that have been completed since January 1, 2004 and are planned within the first five-year BMAP iteration. January 1, 2004 was selected as a starting point for the BMAP strategies because it is the mid-point of the verified period used to determine the impairment in the Upper Wakulla River TMDL. Since the Upper Wakulla River and Wakulla Springs Basin is a ground water driven system, the Department reasoned that due to the delay between reduction strategies and detection of the results that the full benefits of the management strategies completed during the TMDL verified period were not seen in the water quality data. Therefore, these projects have provided additional benefits during the latter portion of the verified period to the Upper Wakulla River and Wakulla Springs and should be listed in the BMAP.

The management strategies were submitted to provide reasonable assurance to the Department that each responsible entity has a plan on how to reduce nitrate concentrations. The sections below outline the strategies submitted by the stakeholders within the PFAs.

4.1 SUFFICIENCY OF EFFORT EVALUATION

The tables in **Section 4.2** list the management strategies to reduce nitrate concentrations within the PFAs. The nitrate load reduction strategies outlined in the project tables, including the activities highlighted below, are expected to reduce nitrate concentrations and improve water quality in the Upper Wakulla River and Wakulla Springs. As water quality improves as a result of these strategies and more data are collected to show the nitrate concentrations and health of the biological community in the Upper Wakulla River and Wakulla Springs, future BMAP iterations may recommend different or additional strategies. For this BMAP iteration, the full implementation of the management strategies listed in the

tables for the PFAs is sufficient to significantly reduce nitrate concentrations and make substantial progress towards meeting the TMDL target. The sufficiency of this BMAP relies on these management strategies; by inclusion in the BMAP, it is required that they remain in effect without substantial revision, as determined by the Department.

4.1.1 WWTFs SUFFICIENCY

The largest point source facility identified in the TMDL was the City of Tallahassee's T.P Smith Water Reclamation Facility and spray field. In 2008, the city began to upgrade the WWTF to meet AWT standards. The target TN concentration in the effluent was achieved ahead of schedule in November 2012, providing a reduction in TN from about 12 mg/L to less than 3 mg/L. Therefore, this facility has met the requirement to achieve the 3.0 mg/L effluent TN concentration. The change in TN concentration resulted in approximately 214,939 kg/yr of TN removed from application at the spray field. It should be noted the 214,939 kg/yr reduction is based upon the permitted flow and concentration for the treatment facility. The actual flow and concentration are much lower, such that the actual load reduction achieved is much greater, on the order of 280,000 kg/yr. The greater reduction value is not used in the sufficiency evaluation because the City is entitled by permit to increase its flow to 26.5 million gallons per day, which will in turn increase the TN discharged. Because the smaller reduction value has been used in the BMAP, the increase in TN load that occurs with growth is already accounted for and will not constitute an increase in load for BMAP purposes.

The city also removed its WWTF biosolids application from the basin, which resulted in a reduction of 169,347 kg/yr of TN that was previously applied to the land in the basin. In addition, the city has a program to assess and rehabilitate the sewer collection system in the older parts of the system. Of the total 895 miles of sewer system, 356 miles are part of the older system. Approximately 7% of the older system sewer lines are within PFA1. The assessment of the older system will be completed by the end of 2014 and the rehabilitation of the system will be completed by 2021.

Leon County is proposing an amendment to the county's code of laws to require AWT (3 mg/L) for new wastewater systems within the PSPZ. The proposed amendment would apply only to WWTFs and not to OSTDS, at this time due to the current legislative statute that limits strategies for OSTDS.

Wakulla County has an adopted comprehensive plan policy that requires AWT (3 mg/L) for any WWTF or spray field located within the Wakulla Springs Special Planning Area. The county conducts routine

inspections and maintenance of the sewer collection system throughout the county. Wakulla County is proposing to upgrade its WWTF for improved treatment and to connect OSTDS within PFA2. The current WWTF has secondary treatment and the proposed upgrade would be to AWT. The county is also looking at options to pump municipal wastewater to the City of Tallahassee WWTF for treatment.

The Upper Wakulla River and Wakulla Springs BMAP requires:

- *New and existing WWTFs permitted by the Department, with a discharge, reuse, or land application site within PFA1 with a permitted capacity of 100,000 gallons per day (gpd) or greater shall achieve an annual average final effluent TN concentration of no greater than 3.0 mg/L.*
- *New and existing WWTFs permitted by the Department, with a discharge, reuse, or land application site within PFA1 with a permitted capacity less than 100,000 gpd and greater than or equal to 20,000 gpd, shall achieve an annual average final effluent TN concentration of no greater than 6.0 mg/L.*
- *New and existing WWTFs permitted by the Department with a discharge, reuse, or land application site within PFA1 with a permitted capacity less than 20,000 gpd shall achieve an annual average final effluent TN concentration of no greater than 10.0 mg/L.*

These effluent limitation requirements are appropriate to protect ground water quality and prevent contribution to the water quality impairment in the Upper Wakulla River. Existing WWTFs are those facilities permitted by the Department on or before the date of BMAP adoption.

As a part of BMAP implementation, the Department will evaluate requests from existing WWTFs to determine whether the TN effluent limits established above may be modified or waived as described in **Section 4.1.1.1** below. The owners of existing WWTFs, which have not already achieved permit limitations equal to or more stringent than those required above, shall be given an opportunity to make a demonstration that reasonably assures the reuse or land application project would not cause or contribute to a violation of the 0.35 mg/L nitrate concentration established by the Upper Wakulla River TMDL. Should the Department concur with the reasonable assurance demonstration request (as specified in **Section 4.1.1.1**), the TN effluent limitation established herein may be modified or waived.

For the first BMAP iteration, since the largest source of WWTFs loading has been addressed, the Department is implementing new treatment requirements for WWTFs in PFA1, and the responsible entities have plans to improve the sewer collection systems and prevent loading in the future from WWTFs, the Department determined that these strategies sufficiently address nitrate loading from the WWTFs within the PFAs.

4.1.1.1 Reasonable Assurance Demonstration

Those WWTFs which are permitted by the Department on or before the date of BMAP adoption and which have not already achieved permit limitations equal to or more stringent than those required in **Section 4.1.1**, shall be given an opportunity to make a demonstration that reasonably assures the reuse or land application project would not cause or contribute to a violation of the 0.35 mg/L nitrate concentration established by the Upper Wakulla River TMDL. The permittee shall submit this request to the Department's Northwest District Office - Wastewater Program staff prior to or at the time of permit application. The demonstration shall be based on relevant water quality data, physical circumstances, or other credible information, and shall include at a minimum the information required in either paragraph (a) or (b) below:

- (a) Monitoring data from ground water well(s) sampling based on a Department approved ground water monitoring plan, showing the annual median value (a minimum of four quarterly samples) for nitrate to be less than or equal to 0.35 mg/L at each demonstration well. The demonstration well shall be located within the flow path of the Floridan aquifer from the effluent reuse or land application site to Wakulla Springs, with the well depth of 15 to 20 feet below the depth of saturation within the Floridan aquifer. For facilities with a permitted capacity of less than 100,000 gpd, ground water data must be provided from at least one demonstration well. For facilities with a larger permitted capacity, ground water data must be provided from multiple demonstration wells, which must be placed using flow gradient data obtained from three local piezometers to define flow gradient. This data will dictate placement of the demonstration wells. The demonstration well(s) is to be located as proximate to the reuse or land application site as practicable. The demonstration shall include monitoring well information which indicates the presence or absence of karst conduits within the monitoring well's intersection of the ground water flow pattern. If this information indicates the presence of karst conduits within the*

monitoring well's intersection of the ground water flow pattern, additional information to that noted in this paragraph may be necessary for a final determination of the necessary TN effluent limit. The demonstration well(s) for rapid infiltration basin reuse or land application sites are to be located as proximate to the site as practicable without compromising the reuse or land application site integrity. The demonstration well(s) for spray irrigation reuse or land application sites is to be located along the downgradient border within the spray irrigation area.

(b) Site specific information as necessary to make a demonstration of no contribution of nitrate at a concentration of 0.35 mg/L to the Floridan aquifer at a demonstration target depth of 15 to 20 feet below the depth of saturation within the Floridan aquifer. This demonstration may include factors such as:

- Dilution.*
- Site-specific geological conditions.*
- Research/studies, including dye tracer tests.*
- Ground water transport modeling.*

The demonstration will be jointly reviewed by appropriate staff from the following Department programs: Northwest District Office – Wastewater Program, Florida Geological Survey (FGS), and Division of Environmental Assessment and Restoration. If the Department's review results in concern that the reuse or land application site effluent is reaching karst conduits, additional information to that noted in paragraphs (a) or (b) above may be necessary for a final determination of the necessary TN effluent limit. The final decision of demonstration of reasonable assurance will be made by the Northwest District Director in conjunction with input from staff in the Department's FGS and the Division of Environmental Assessment and Restoration.

If the TN final effluent limit as described in **Section 4.1.1** is modified or waived subsequent to the demonstration of reasonable assurance, the permit shall include effluent monitoring requirements for TN and ground water monitoring requirements from the Floridan aquifer for nitrate as nitrogen. At each permit renewal, the demonstration of reasonable assurance shall be reviewed by the Department programs previously identified in the joint review to reasonably assure the reuse or land application would not cause or contribute to a violation of the 0.35 mg/L nitrate concentration established by the

Upper Wakulla River TMDL. This review shall include the original data obtained during the initial demonstration as well as any new data that has been obtained since permit issuance.

4.1.2 OSTDS SUFFICIENCY

Prior to the completion of the OSTDS Initiative identified in **Section 1.3.4**, the following activities will be implemented by the stakeholders. Leon County will prepare a GIS inventory of the OSTDS located within the county, revise its septic system ordinance to require greater separation between the drainfield and seasonal high water table to reduce the amount of nitrate that enters the ground water, and add educational kiosks about septic systems at the Woodville Community Center. The county will review the results of the FDOH study on nitrate-reducing OSTDS and modify its code, if appropriate, within the OSTDS Initiative process. Subsequent to the development of the OSTDS Plan, the county and Department will identify septic systems in the PFAs that are not feasible for connection to central sewer, and develop a funding plan and schedule to assist homeowners with upgrading to advanced nitrate-reducing systems, if such technologies are available. The City of Tallahassee and Leon County have enacted ordinances to establish the PSPZ, which reduce the development in the urban fringe in the PSPZ and allow development in the urban area only to the extent permitted by the future land use map. In addition, the county is proposing to sewer within the PSPZ to remove OSTDS, dependent on project and funding approval through the county's sales tax process. This strategy would result in a large TN reduction, when the sewerage and connections occur. The Department will identify state and federal funds to minimize connection fees for homeowners.

Wakulla County has an adopted comprehensive plan policy that requires advanced nitrogen reducing OSTDS on parcels smaller than five acres in the Wakulla Springs Special Planning Area; within 150 feet of surface water, swallet, or other karst feature, or within 300 feet of a 1st or 2nd magnitude spring; and on all parcels less than 0.229 acres in size. The county is pursuing funding for planned sewer in Greiner's Addition, Magnolia Gardens, and Wakulla Gardens, which could remove the existing 1,330 septic systems, and an estimated potential for 2,251 additional systems in the future. The county is seeking funding to inspect and repair old, damaged, and failing OSTDS in the Wakulla Springs Basin. The county is also looking to form a tax increment financing (TIF) district for the Crawfordville area to fund improvements, including basic infrastructure.

Wakulla Springs State Park sewered its property in 1992, which removed all OSTDS within the Park except for one septic system that serves the gatehouse. This septic system is a performance-based treatment system, which has a high nitrogen removal efficiency.

In addition, the Department, FDOH, City of Tallahassee, Leon County, and Wakulla County will work together through the OSTDS Initiative to identify effective management strategies for the basin, and develop the strategies and milestones. By the end of the first, five-year BMAP iteration, the responsible stakeholders will have already begun to implement or will be ready to implement agreed upon OSTDS reduction strategies.

Based upon the adopted and planned measures and actions resulting from the OSTDS Initiative, OSTDS sources will be sufficiently addressed for the first iteration of the BMAP. Depending on water quality trends, additional efforts may be needed in future BMAP iterations to address OSTDS.

4.1.3 RESIDENTIAL FERTILIZER SUFFICIENCY

The City of Tallahassee has a fertilizer use ordinance and an education program. Based on surveys conducted after the ordinance was adopted and the education efforts began, the city determined that the number of households that applied fertilizer decreased by 49% between 2007 and 2012. In addition, for those households that still apply fertilizer, the amount applied per household decreased by 27%.

FDOT District 3 has eliminated fertilizer use for turf maintenance along the roadways within the basin and is, therefore, no longer a source of fertilizer, except during the establishment of new turf grass. This fertilizer cessation resulted in a removal of about 4,640 kg/yr of TN applied to the land's surface.

Leon County has a fertilizer ordinance for commercial applicators and it is considering a modification to the ordinance to reduce the nitrogen application rates in areas south of the Cody Scarp, if allowable by Florida law. The county also has an education and outreach program that provides the public with information about fertilizer use through the Florida Yards and Neighborhoods (FYN) Program, distribution of pamphlets, presentations, and workshops.

Wakulla County has an adopted fertilizer use ordinance that adopts the model ordinance on Florida-friendly fertilizer use on urban landscapes. The county is also planning to add fertilizer management education and outreach efforts.

The responsible stakeholders have strategies in place to reduce/remove fertilizer use; therefore, these strategies are collectively sufficient to address sources of residential fertilizer during the first BMAP iteration.

4.1.4 AGRICULTURAL FERTILIZER AND LIVESTOCK SUFFICIENCY

In 2007, the City of Tallahassee eliminated the fertilizer application on the SESF where crops are grown. This resulted in a reduction of 61,500 kg/yr of TN that was previously applied on the land.

Within the PFAs, there are approximately 5,766.52 acres in agricultural land use, of which 1,308.85 acres, or 22.7%, were enrolled in FDACS BMP programs as of June 30, 2013. During the first BMAP iteration, FDACS plans to enroll additional producers in BMPs, with an enrollment target within the PFAs is 90% of the total agricultural acres. Adjustments may be made to the total agricultural acreage within the PFAs may be necessary as FDACS assesses the current uses of those areas identified as agricultural land uses.

It is important to understand that, even if all targeted agricultural operations are enrolled, not all of the acreage listed as agriculture

Table 17 will be included in enrollment figures. The notices of intent will document the estimated total number of acres on which applicable BMPs are implemented, not the entire parcel acreage. This is because land use data can contain nonproduction acres (such as buildings, parking lots, and fallow acres) that will not be counted on the notices of intent submitted to FDACS. There also may be significant amounts of acreage that do need to be enrolled, such as lands that are not actively involved in commercial agriculture (operations conducted as a business). There are often areas of low-density residential uses on large parcels of grassed land, or land that was but is no longer in commercial agricultural production. This information is impossible to discern in the photo interpretation process used to generate the land use data. Local government, NFWFMD, or Department BMPs may address these noncommercial sources. For these reasons, it is possible that attaining 90% enrollment of the current agricultural land use acreage would constitute full enrollment of the operations appropriate to enroll. Therefore, this percentage may need to be adjusted based on further analysis of land use data and additional information collected during the enrollment process. As warranted, FDACS will address this matter in future BMAP annual reports. Agricultural enforcement for BMAP actions is based on the FWRA, which states that nonpoint source dischargers who fail either to implement the appropriate BMPs or conduct water quality monitoring prescribed by the Department or a water management district that demonstrates compliance with water quality standards may be subject to enforcement action by either of those agencies. All agricultural non-point sources in the BMAP area are statutorily required either to implement FDACS-adopted BMPs or to conduct water quality monitoring that demonstrates compliance with state water quality standards.

With the implementation of these strategies, agricultural fertilizer and livestock nitrate loading within the PFAs will be sufficiently addressed for the first BMAP iteration.

4.1.5 STORMWATER SUFFICIENCY

The City of Tallahassee has a pet waste ordinance and an education program that reaches out to the public about pet waste management. Since the adoption of the ordinance and the implementation of the education efforts, the city found that 34% of dog owners began picking up after their pets. In addition, the city has constructed at least 74 various stormwater treatment capital improvement projects throughout the city since 2004 (see **Appendix C**).

FDOT District 3 has street sweeping of its curb and gutter roads within urbanized areas through contracts with Leon County and the City of Tallahassee. FDOT District 3 is also working with the Department to investigate the use of innovative nitrogen removal technologies for future projects within the PFAs.

Leon County enacted a pet waste ordinance in 2011, which includes an education program to promote the cleanup of pet waste. The county also adopted irrigation and landscaping ordinances. The county participates in the FYN Program, which provides education and outreach to the public. The county adopted land development regulations in 2012, including minimum environmental regulations countywide that exceed state stormwater standards. These minimum countywide regulations also apply within the City of Tallahassee. The county also adopted comprehensive plan amendments that reduced the allowable development in the urban fringe areas to focus development in the urban areas. In addition, the county is proposing to develop a low impact development program that would provide incentives to reduce nitrogen loading to surface and ground waters.

Leon County has also completed several stormwater improvement projects. The county constructed two stormwater retrofit ponds in Harbinwood Estates and planted/stabilized 1,200 linear feet of channel. The county constructed the 10-acre Fuller Road Regional Facility as a stormwater retrofit project at Interstate-10 and U.S. 27. The county removed a 15-acre nutrient sediment dam and stabilized Munson Slough as part of the Lake Munson erosion and flood protection upgrades. The county also maintains the stormwater system in accordance with the MS4 permit and street sweeps 762 miles of roads annually, removing approximately 51.3 kg/yr of TN.

Wakulla County has adopted comprehensive plan policies that establish special area plans for three projects within the Wakulla Springs Basin. These policies require nitrate loading analyses for development and establish standards for stormwater, karst feature protections, landscaping, and open space.

These strategies together will sufficiently address stormwater nitrate loading for the first BMAP iteration.

4.1.6 OTHER STRATEGIES

The stakeholders have also implemented or are planning to implement studies, protection measures, and source control efforts that will help improve water quality in the Upper Wakulla River and Wakulla Springs Basin.

The City of Tallahassee and Leon County have an ordinance that identifies the PSPZ. The City of Tallahassee adopted comprehensive plan amendments that reduced the allowed development in the urban fringe areas inside the PSPZ and requires a no net increase in dwelling units from the future land use map within the PSPZ.

FDOT District 3 implements a protection measure in which it avoids constructing stormwater treatment ponds directly over mapped karst caves. A 300 foot buffer is provided around these known karst caves.

Leon County conducts water quality sampling at 73 sites and uses these data in annual water quality reports to help prioritize water quality project needs. The county completed a study on Woodville recharge aquifer protection using a grant from EPA, and the county is planning to create annual Wakulla Springs status reports for the Board of County Commissioners. Leon County has purchased land to protect sinks within the basin, and it has an adopted aquifer wellhead protection ordinance. The county also has a litter control program and Adopt-A-Road program.

Leon County and Wakulla County prepared AVA reports (Baker, et. al. 2007 and Baker, et. al. 2009) to determine the most vulnerable areas in each county. The City of Tallahassee, Leon County, and Wakulla County funded the Lombardo study (Lombardo 2011) to identify options for addressing OSTDS loading. Wakulla County has a springs protection ordinance that identifies the Wakulla Springs Special Planning Area, and the county is considering the expansion of this area based on geologic vulnerability. The county has ordinances that requires karst buffers and ground water extraction limitations. Wakulla County has comprehensive plan policies that set standards for the Northeast Wakulla Sustainable Community; develop solutions to restore the health of Wakulla Springs; protect the functions of ground water recharge areas, springs, and springsheds; and encourage development in Crawfordville with connection to sewer service. The county also has a litter control ordinance that prohibits litter and dumping along roadways and waterways.

In addition, the Wakulla Springs State Park conducts several education and outreach programs to educate the public about the Wakulla River and Wakulla Springs. The Learning in Florida's Environment Program occurs annually with middle school students. The Project Learning Tree Program also occurs annually and involves nature activities with elementary school students. The Green Guide Class is an environmental education program to train Green Guides to conduct river wildlife surveys, aquatic studies on the river, and tree identification. The Park also participates in the annual Wakulla Wildlife Festival, and hosts a variety of Park Ranger programs.

4.2 STAKEHOLDER MANAGEMENT STRATEGIES TABLES

The tables below set forth the management strategies, and the time frames for implementation of those strategies required in this BMAP. Additional reductions are expected to be necessary in future BMAP phases to meet the loads specified in the TMDLs. Where available, the tables provide information on the assigned nutrient reductions, shown in kg/yr, for projects benefiting the watershed. The BMAP strategies represent a considerable local, regional, and state investment in a multifaceted approach to water quality protection and restoration within the Upper Wakulla River and Wakulla Springs system. Responsible entities submitted these management strategies to the Department with the understanding that these strategies would be included in the BMAP, thereby requiring each entity to timely implement the proposed strategies and achieve the assigned load reduction estimates. However, this list of strategies is meant to be flexible enough to allow for changes that may occur over time. Any change in listed management strategies, or the deadline to complete these actions, must first be approved by the Department. Substituted strategies must result in equivalent or greater nutrient reductions than expected from the original strategies.

The following tables summarize the management strategies provided by each of the stakeholders within the PFAs. For the future management strategies, the stakeholders are identifying feasible funding strategies to implement the activities identified in the tables below. These funding strategies include the Leon County sales tax extension, RESTORE Act funding, Section 319 funding, and TMDL grants (refer to **Appendix D** for other funding sources).

TABLE 11: FLORIDA DEPARTMENT OF ENVIRONMENTAL PROTECTION MANAGEMENT STRATEGIES

NUMBER	NAME	DESCRIPTION	STATUS	CATEGORY
FDEP-1	TN Requirements for WWTFs in PFA1	Update permits, as needed, to incorporate new requirements for WWTFs within PFA1.	Ongoing	Wastewater

TABLE 12: FDOT DISTRICT 3 MANAGEMENT STRATEGIES

N/A = Not applicable

* The estimated reductions are based on the amount of TN applied to the land surface and do not represent the nitrate loading to ground water.

NUMBER	NAME	DESCRIPTION	STATUS	ESTIMATED REDUCTIONS (KG/YR OF TN)*	CATEGORY
FDOT-1	Fertilizer Cessation	Eliminated fertilizer use for ongoing turf maintenance within the entire basin, including areas outside the PFAs.	Complete	4,640	Residential Fertilizer
FDOT-2	Street Sweeping	Contract for street sweeping of FDOT curb and gutter roads within the urbanized areas of Leon County and City of Tallahassee.	Ongoing	Not quantified	Stormwater
FDOT-3	Innovative Nitrogen Removal Technologies	Investigating the use of innovative nitrogen removal technologies as part of the present work program within the PFAs.	Planned	N/A	Stormwater
FDOT-4	Avoidance of Mapped Karst Caves	Avoid constructing ponds directly over mapped karst caves by providing a 300 foot buffer.	Ongoing	N/A	Protection Measure
TOTAL	N/A	N/A	N/A	4,640	N/A

TABLE 13: WAKULLA SPRINGS STATE PARK MANAGEMENT STRATEGIES

NUMBER	NAME	DESCRIPTION	COST	STATUS	CATEGORY
WP-1	Learning in Florida's Environment	Annual environmental education program with three outdoor field activities to investigate biodiversity of park wildlife: (1) river wildlife survey to observe and record wildlife on the river, (2) aquatic study of the Wakulla River to collect macroinvertebrates and others, and (3) aquatic study of Cypress Dome to collect macroinvertebrates and others. Students develop hypotheses related to habitat to investigate diversity of park aquatic wildlife. A total of 180 6 th grade middle school students participated over four field trip days (45 students per day).	17 staffing days	Ongoing	Education
WP-2	Project Learning Tree	Annual environmental education program with three participatory nature activities involving 320 elementary school students.	2 staffing days	Ongoing	Education
WP-3	Green Guide Class	Annual environmental education program with 24 Green Guides in training. Four outdoor field activities to investigate biodiversity of park wildlife: (1) river wildlife survey to observe and record wildlife on the river, (2) aquatic study of Wakulla River to collect macroinvertebrates and others, (3) aquatic study of Cypress Dome collect macroinvertebrates and others, and (4) tree identification workshop. Occurs over two field trip days.	3 staffing days	Ongoing	Education
WP-4	Wakulla Wildlife Festival	Annual environmental education program with bird of prey and reptile shows, over 25 nature related exhibits, seven nature field trips, and over 2,500 Park visitors of all ages. All day event to promote environmental awareness and nature appreciation.	24 staffing days	Ongoing	Education
WP-5	Park Ranger Programs	Monthly morning nature walks, annual songbird walk, annual photographers tour, annual medicinal plant walk, and annual Swift Night Out!	3.5 staffing days	Ongoing	Education

TABLE 14: CITY OF TALLAHASSEE MANAGEMENT STRATEGIES

N/A = Not applicable

* The estimated reductions are based on the amount of TN applied to the land surface and do not represent the nitrate loading to ground water.

NUMBER	NAME	DESCRIPTION	ESTIMATED COST	START DATE	COMPLETION DATE	STATUS	ESTIMATED REDUCTIONS (KG/YR OF TN)*	CATEGORY
COT-1	Wastewater Treatment Facility Upgrade to AWT	Upgrade to AWT to reduce the nitrogen concentration by 75% at the spray field near Tram Road and improve the quality of reuse.	\$227,000,000	2008	11/2012	Completed	214,939	Wastewater
COT-2	Biosolids Application Elimination	Eliminated biosolids disposal in the springshed.	N/A	2001	2006	Completed	169,347	Wastewater
COT-3	Assessment and Rehabilitation of the Sewer Collection System	Project consisting of an assessment and rehabilitation of the sewer collection system. The “older systems,” constructed of vitrified clay pipe, consist of 356 miles of the 895 total miles in the system. Of the 356 miles of “old system,” approximately 26 miles (7%) are in the PFA1. The rehabilitation of the sewer system is prioritized based upon level of severity or in conjunction with other planned projects, such as the repaving of a roadway. Completion of assessment expected by 12/31/2014 and completion of rehabilitation by 2021.	\$10,000,000	2011	2021	Ongoing	N/A	Wastewater
COT-4	Fertilizer Use Ordinance (Number 08-O-72AA)	Households that applied fertilizer (2007 vs. 2012) decreased 49%, level of nitrogen applied per household decreased 27%.	N/A	2009	Ongoing	Ongoing	129.4	Residential Fertilizer
COT-5	Public Education for Stormwater, Fertilizer, and Pet Waste	Public education using various media resources to promote behavioral changes for individuals and businesses to conserve water and reduce or eliminate pollution impacts to surface water and ground water.	\$1,700,000 (since 2006)	2006	Ongoing	Ongoing	46.6	Residential Fertilizer
COT-6	Spray Field Fertilizer Application	Eliminated fertilizer application on the spray field (in the springshed).	N/A	2007	2007	Completed	61,500	Farm Fertilizer
COT-7	Pet Waste Ordinance (Number 10-0-15AA)	34% of dog owners began picking up after their pets.	N/A	06/2008	Ongoing	Ongoing	29.1	Stormwater
COT-8	Cypress Lake	Conveyance Improvement	Unknown	Unknown	Unknown	Completed	9.6	Stormwater
COT-9	3907 Roswell Drive	Conveyance Improvement	Unknown	Unknown	Unknown	Completed	4.3	Stormwater
COT-10	PSPZ Ordinance (Number 08-O-68AA)	Identifies the PSPZ where development has to meet more stringent requirements.	N/A	04/2009	Ongoing	Ongoing	Not quantified	Protection Measure
COT-11	Comprehensive Plan Provisions (Conservation Element Policy 4.2.5)	Reduced allowed development in the urban fringe inside the PSPZ; created transfer of development units system that allows no net increase in dwelling units in the PSPZ; and allows transfer of development rights from rural to urban fringe areas into Woodville.	N/A	2009	Ongoing	Ongoing	Not quantified	Protection Measure
TOTAL	N/A	N/A	\$314,895,489	N/A	N/A	N/A	446,005	N/A

TABLE 15: LEON COUNTY MANAGEMENT STRATEGIES

N/A = Not applicable

* The estimated reductions are based on the amount of TN applied to the land surface and do not represent the nitrate loading to ground water.

** The estimated project cost is only for adding the sewer force main in the PSPZ. There will be additional costs for the homeowners to connect to the sewer system.

NUMBER	NAME	DESCRIPTION	ESTIMATED COST	START DATE	COMPLETION DATE	STATUS	ESTIMATED REDUCTIONS (KG/YR OF TN)*	CATEGORY
LC-1	Amendment to Code of Laws for Wastewater Treatment Facilities	Consider establishing AWT standard for new wastewater treatment systems for new development within the PSPZ, with means for managing such new wastewater treatment systems not on central sewer, to the extent such wastewater treatment systems will be regulated by the Department under Chapter 403, F.S., and not regulated by FDOH and to the extent that such proposed amendment is consistent with the laws of the State of Florida and the rules of the Department.	Staff time	2013	2014	Proposed	N/A	Wastewater
LC-2	Sewering within the PSPZ	While all capital projects are subject to annual budget and appropriations, the county commits to this sewer system project under two conditions precedent, those being: (1) this project is on the final proposed project list for the one cent infrastructure sales tax extension; and (2) the successful passage of the necessary referendum to approve the proposed one cent infrastructure sales tax extension.	\$57,900,000**	2020	2025	Proposed	Reductions will be calculated as part of the OSTDS Initiative	OSTDS
LC-3	Septic Tank Inventory	Preparation of a GIS inventory of all the septic systems in Leon County.	\$50,000	2013	2014	Proposed	N/A	OSTDS
LC-4	Septic Tank Repairs	Proposed revision to the septic tank ordinance to require repairs to have a minimum of 24 inch separation between drainfield and seasonal high water table.	Staff time	2013	2014	Proposed	N/A	OSTDS
LC-54	Septic Tank Nitrogen Removal Requirements	Pending the results of FDOH evaluation of passive systems as referenced in Section 381.0065(4)(x), F.S, the county shall: (1) review the results of this Florida study of nitrogen reducing, performance-based OSTDS, including passive systems; (2) identify passive systems regulated under Section 381.0065, F.S., that are approved by the State of Florida for permitting and appropriate for use within Leon County; (3) evaluate factors such as cost and operational feasibility of such passive systems; and (4) develop a proposed amendment to the code of laws requiring the use of appropriate systems for new construction within the PSPZ.	Staff time	2015	2017	Proposed	N/A	OSTDS
LC-6	Septic Tank Education	Add educational kiosks at the Woodville Community Center to explain how septic systems work.	\$2,500	2014	2015	Proposed	21.7	OSTDS
LC-7	Enacted Comprehensive Fertilizer Ordinance (Number 09-34)	Requires commercial applicators to follow a set of BMPs for the application of fertilizers.	Staff time	2009	2009	Completed	12.4	Residential Fertilizer
LC-8	Fertilizer Ordinance Modification	Consider modification to the fertilizer ordinance to reduce nitrogen application rates below the Cody Scarp, if allowable by Florida law.	Staff time	2014	2014	Proposed	N/A	Residential Fertilizer

Draft Upper Wakulla River and Wakulla Springs Basin Management Action Plan – August 2014

NUMBER	NAME	DESCRIPTION	ESTIMATED COST	START DATE	COMPLETION DATE	STATUS	ESTIMATED REDUCTIONS (KG/YR OF TN)*	CATEGORY
LC-9	Education and Outreach	Outreach through FYN, illicit discharge program, pamphlets, presentations, workshops, and special events.	Staff time	N/A	Ongoing	Ongoing	24.7	Residential Fertilizer, Stormwater
LC-10	Enacted a Pet Waste Ordinance (Number 11-21)	Education program to promote cleanup of pet waste as a contributor to surface water pollution.	Staff time	N/A	08/2011	Completed	15.5	Stormwater
LC-11	Land Development Regulations	Adopted new minimum countywide environmental regulations that exceed state stormwater standards.	Staff time	2011	2012	Completed	N/A	Stormwater
LC-12	Comprehensive Plan Provisions (Conservation Element Policy 4.2.5)	Reduced allowable development in the urban fringe down from up to 1 unit per acre to 1 unit per 3 acres. Transfer of density with no net increase in dwelling units as allowed on the future land use map permitted.	Staff time	01/2008	04/2009	Completed	N/A	Stormwater
LC-13	Lake Munson Erosion and Flood Protection Upgrades	Removed 15-acre nutrient sediment dam in 2002, stabilized Munson Slough to reduce erosion, and repaired the dam for stabilization of lake hydroperiod.	\$7,200,000	1996	2012	Completed	157,068.2	Stormwater
LC-14	Harbinwood Estates Ponds	Constructed two stormwater retrofit ponds and planted/stabilized 1,200 linear feet of channel.	\$2,980,000	N/A	06/2008	Completed	108.0	Stormwater
LC-15	Fuller Road Regional Facility	Constructed 10-acre stormwater retrofit facility at Interstate-10 and US 27.	\$800,000	N/A	03/2010	Completed	208.2	Stormwater
LC-16	Low Impact Development	Develop low impact development incentives to reduce nitrogen loading to surface waters and ground water.	Staff time	2013	2014	Proposed	N/A	Stormwater
LC-17	Street Sweeping	Contract for 762 miles of street sweeping annually; collects 106.81 tons/yr.	\$ 67,500/yr	N/A	Ongoing	Ongoing	51.3	Stormwater
LC-18	FYN Program	Participation in the FYN Program through the Cooperative Extension Service.	\$55,000/yr	N/A	Ongoing	Ongoing	74.2	Stormwater
LC-19	Irrigation Ordinance	Irrigation Ordinance.	N/A	N/A	Ongoing	Ongoing	12.4	Stormwater
LC-20	Landscaping Ordinance	Landscaping Ordinance.	N/A	N/A	Ongoing	Ongoing	12.4	Stormwater
LC-21	Aquifer Vulnerability Assessment	Study to determine the areas with the most direct connections to Wakulla Springs. Study ignored sinks within surface waters in its assessment.	\$73,000	2006	10/2007	Completed	N/A	Study
LC-22	Lombardo Report	In conjunction with City of Tallahassee and Wakulla County, report to compile previous studies identifying nitrogen loading to Wakulla Springs, and to identify treatment and management options, where central sewer is not available, for the purpose of reducing nitrate loading to Wakulla Springs from septic systems located within the geographic area of Leon and Wakulla Counties.	\$60,000	04/2010	02/2013	Completed	N/A	Study
LC-23	Water Quality Sampling	Sample 73 sites in 13 lakes, 27 streams, and 2 rivers.	\$250,000	N/A	Continuous	Ongoing	N/A	Study
LC-24	Preparation of Annual Water Quality Report	Preparation and publishing an annual water quality report to document the health of our natural systems and utilize for prioritization of water quality project needs.	\$15,000/yr	N/A	Available in summer of each year	Ongoing	N/A	Study

Draft Upper Wakulla River and Wakulla Springs Basin Management Action Plan – August 2014

NUMBER	NAME	DESCRIPTION	ESTIMATED COST	START DATE	COMPLETION DATE	STATUS	ESTIMATED REDUCTIONS (KG/YR OF TN)*	CATEGORY
LC-25	Woodville Recharge Aquifer Protection Study	EPA grant to study the 60 square mile Woodville Recharge Basin for flooding, water quality, and aquifer protection.	\$300,000	2005	2007	Completed	N/A	Study
LC-26	Annual Wakulla Springs Status Report	Commitment to developing an annual status report on Wakulla Springs for the Board of County Commissioners.	Staff time	01/2014	01/2018	Ongoing	N/A	Study
LC-27	Established the Primary Springs Protection Zone (Number 09-12)	Enacted to establish a defined area for enforcement for additional water quality protections within this zone.	Staff time	2006	03/2009	Completed	Not quantified	Protection Measure
LC-29	Fred George Basin Acquisition	Acquisition of 166 acres which includes Fred George Sink for preservation/protection of the sink.	\$2,600,000	2012	2012	Completed	N/A	Protection Measure
LC-30	Fred George Basin Wetland Rehydration	Wetland rehydration planned for enhanced water quality treatment of runoff prior to entering the sink. Survey, wetland delineation, Uniform Mitigation Assessment Method scoring, and design modeling are funded. Construction funding needs to be programmed once the design scope is complete.	\$200,000 (survey), \$800,000 (construction)	06/2013	2017	Planned	N/A	Protection Measure
LC-31	Eight Mile Pond	Acquisition of 132 acres immediately upstream of Ames Sink to preserve/protect the sink. Property acquired through environmental permitting as mitigation for Florida Gas Transmission Line linear impacts.	Staff time	2009	07/2010	Completed	N/A	Protection Measure
LC-32	Aquifer Wellhead Protection Ordinance (Number 07-20)	Includes Aquifer Protection Program.	Staff time	N/A	07/2007	Completed	N/A	Protection Measure
LC-33	Litter Control Program	Maintain 2,316 miles of right-of-way, collecting 78.4 tons of waste.	Staff time	N/A	Ongoing	Ongoing	N/A	Other Source Control
LC-34	Adopt-A-Road Program	Maintain 112 miles of right-of-way, collecting 2.11 tons of trash.	N/A	N/A	Ongoing	Ongoing	N/A	Other Source Control
TOTAL	N/A	N/A	\$73,903,000	N/A	N/A	N/A	157,609.0	N/A

TABLE 16: WAKULLA COUNTY MANAGEMENT STRATEGIES

N/A = Not applicable

* The estimated reductions are based on the amount of TN applied to the land surface and do not represent the nitrate loading to ground water.

NUMBER	NAME	DESCRIPTION	ESTIMATED COST	START DATE	COMPLETION DATE	STATUS	ESTIMATED REDUCTIONS (KG/YR OF TN)*	CATEGORY
WC-1	Comprehensive Plan Infrastructure Policy 1.3.6	Requires AWT for any WWTF or spray field located in the Wakulla Springs Special Planning Area.	N/A	2012	Ongoing	Ongoing	Not quantified	Wastewater
WC-2	Wakulla County WWTF Upgrade and Expansion	Proposed upgrades and expansion to include contributing systems within PFA2 to the WWTF for improved treatment.	\$1,000,000	10/15/2012	N/A	Advanced planning, seeking funding	N/A	Wastewater

Draft Upper Wakulla River and Wakulla Springs Basin Management Action Plan – August 2014

NUMBER	NAME	DESCRIPTION	ESTIMATED COST	START DATE	COMPLETION DATE	STATUS	ESTIMATED REDUCTIONS (KG/YR OF TN)*	CATEGORY
WC-3	Pumping Wastewater to City of Tallahassee	Planned pumping of municipal wastewater from Wakulla County to City of Tallahassee WWTF.	\$8,054,000	10/15/2012	N/A	Advanced planning, seeking funding	N/A	Wastewater
WC-4	Public Education on OSTDS	Provide citizens and officials with the best available information for decision making regarding the use of OSTDS and decentralized wastewater systems to reduce nutrients in ground water to the springs.	N/A	2007	2007	Completed	Not quantified	OSTDS
WC-5	Comprehensive Plan Infrastructure Policy 1.3.7	Requires nitrogen reducing septic systems on parcels smaller than five acres in the Wakulla Springs Special Planning Area; within 150 feet of surface water, swallet, or other karst feature, or within 300 feet of a 1st or 2nd magnitude spring; and on all parcels less than 0.229 acres in size.	N/A	2012	Ongoing	Ongoing	Not quantified	OSTDS
WC-6	Historical Neighborhood Sewer and Stormwater	Planned sewer and stormwater treatment for Greiner's Addition, Magnolia Gardens, and Wakulla Gardens. Among the three subdivisions, there are approximately 1,330 existing septic systems and the county estimates there are potentially 2,251 additional systems that could be installed.	\$36,180,300	10/15/2012	N/A	Advanced planning, seeking funding, possible TIF project	10,409.4	OSTDS
WC-7	Wakulla Springs Watershed	Inspection and repair of old, damaged, and failing systems in the Wakulla Springs watershed area.	1,380,300	10/15/2012	N/A	Advanced planning, seeking funding	Not quantified	OSTDS
WC-8	Crawfordville TIF District	TIF District for Crawfordville area to fund improvements including basic infrastructure.	N/A	11/5/2012	Ongoing	Ongoing	Not quantified	OSTDS
WC-9	Fertilizer Use Ordinance 2010-1	Adopts model ordinance on Florida-friendly fertilizer use on urban landscapes.	N/A	2/4/2010	N/A	Ongoing	22.0	Residential Fertilizer
WC-10	Fertilizer Management Education	Education and outreach to the public about fertilizer management.	N/A	2014	2014	Proposed	Part of WC-11	Residential Fertilizer
WC-11	Comprehensive Plan Future Land Use Policies 1.2.10, 1.2.10.2, and 1.2.10.3 - Special Area Plans	Establishes special area plans for the Bloxham Special Area Plan, Special Area Plan #2, and Spring Creek Highway Special Area Plan within the Wakulla Springs Basin. Requires nitrate loading analyses for development. Establish standards for stormwater, karst feature protections, landscaping, and open space.	N/A	2004	Ongoing	Ongoing	Not quantified	Stormwater
WC-12	Wakulla County Aquifer Vulnerability Assessment	Modeling effort to identify the most vulnerable areas in the county.	N/A	2007	09/2009	Completed	N/A	Study

Draft Upper Wakulla River and Wakulla Springs Basin Management Action Plan – August 2014

NUMBER	NAME	DESCRIPTION	ESTIMATED COST	START DATE	COMPLETION DATE	STATUS	ESTIMATED REDUCTIONS (KG/YR OF TN)*	CATEGORY
WC-13	Comprehensive Plan Future Land Use Policy 1.2.9.1 - Northeast Wakulla Sustainable Community	Establishes standards for 606 acre site within the Wakulla Springs Basin. Requires no net increase in nutrients or phosphorous loading to ground water. Sustainable community standards established for stormwater, ground water, open space, and BMPs. Requires AWT standards for sanitary sewer service to the site.	N/A	2003	Ongoing	Ongoing	Not quantified	Protection Measure
WC-14	Ordinance 2006-58 (Comprehensive Plan Conservation Policy 13.1 and Future Land Use Objective 13)	Add karst buffers; require a nitrate loading study for proposed development greater than one acre; incorporate FYN practices and landscaping standards that promote native vegetation for new subdivisions; reduce nitrates from public facilities; and address stormwater, water conservation, wastewater facilities, treated wastewater reuse, and natural water flows.	N/A	2006	Ongoing	Ongoing	Not quantified	Protection Measure
WC-15	Comprehensive Plan Conservation Objective 12.0	Develop solutions to restore the health of Wakulla Springs by reducing pollutants in the ground water, and implementing policies for the Wakulla Springs Special Planning Area.	N/A	2010	Ongoing	Ongoing	Not quantified	Protection Measure
WC-16	Comprehensive Plan Conservation Policy 12.1	Establishes a transfer of development rights policy to encourage development in Crawfordville with connection to sewer service, “no net increase in dwelling units” allowed by the future land use map in the Wakulla Springs Special Planning Area, fertilizer restrictions based on FYN Program.	N/A	2010	Ongoing	Ongoing	N/A	Protection Measure
WC-17	Comprehensive Plan Conservation Policy 12.2	County shall consider expanding the Wakulla Springs Special Planning Area based on geologic vulnerability.	N/A	2010	Ongoing	Ongoing	N/A	Protection Measure
WC-18	Comprehensive Plan Infrastructure Objective 2.5	To protect the functions of ground water recharge areas, springs, and springsheds.	N/A	1995	Ongoing	Ongoing	Not quantified	Protection Measure
WC-19	Ground Water Extraction Ordinance	Requests the NFWFMD establish minimum flows and levels for Wakulla Springs and requests NFWFMD deny permits to transport water from the Wakulla Springs springshed and the Ochlockonee and St. Marks Rivers.	N/A	N/A	6/18/2012	Ongoing	N/A	Protection Measure
WC-20	Litter Regulations. Code of Ordinances Section 27.049	Prohibits litter and dumping along roadways and waterways, and establishes penalties.	N/A	1992	Ongoing	Ongoing	N/A	Other Source Control
TOTAL	N/A	N/A	\$46,614,600	N/A	N/A	N/A	10,431.4	N/A

TABLE 17: AGRICULTURAL LAND USES AND BMP ENROLLMENT IN THE PFAs AS OF JUNE 30, 2013

Note: The acreage identified as agricultural in the land use may not all be in active commercial production and, therefore, may not all be targeted for enrollment.
Reductions from 100% enrollment are 2,671.61 kg/year of TN on the land surface.

2009 NFWMD LAND USE	ACRES	RELATED FDACS BMP PROGRAMS	ENROLLED ACRES	RELATED NOTICES OF INTENT
Pasture and Rangeland	3,762.36	Cow/Calf	1,308.85	6
Row/Field/Mixed Crops	288.48	Vegetable/Agronomic Crops	0.00	N/A
Hay Fields	1,163.58	Vegetable/Agronomic Crops Revision (Future)	0.00	N/A
Fallow Crop Land	472.66	N/A	0.00	N/A
Horse Farms	37.29	Equine	0.00	N/A
Other Groves	19.24	Specialty Fruit and Nut	0.00	N/A
Nurseries and Vineyards	15.36	Future Nursery, Specialty Fruit and Nut	0.00	N/A
Tree Nurseries	2.77	Future Nursery, Specialty Fruit and Nut	0.00	N/A
Ornamentals	14.78	Container Nursery	0.00	N/A
Total	5,776.52	N/A	1,308.85	6
Acreage Enrolled (as of June 30, 2013)	1,308.85	N/A	N/A	N/A
Remaining Acres to Enroll	4,467.67	N/A	N/A	N/A

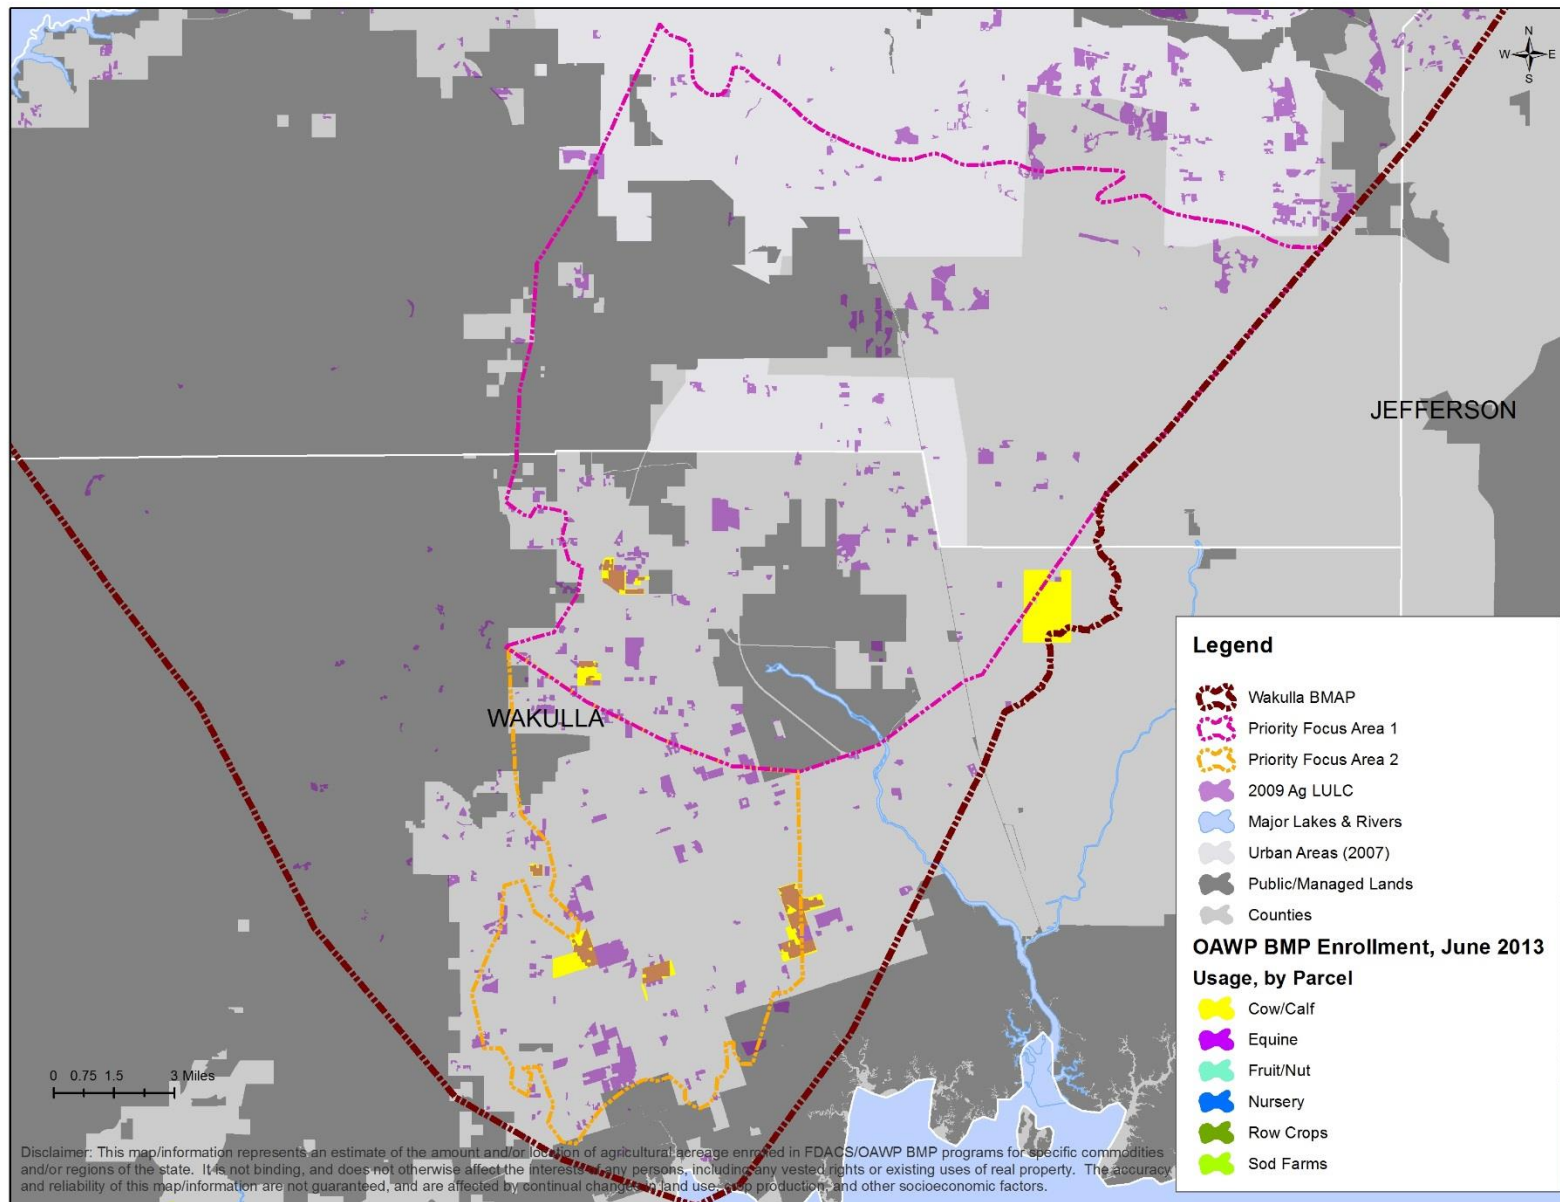


FIGURE 12: AGRICULTURAL LANDS ENROLLED IN BMPs IN THE PFAs, AS OF JUNE 2013

Chapter 5: MANAGEMENT STRATEGIES OUTSIDE OF THE PFAS

In addition to the management strategies implemented by the stakeholders in the PFAs that are listed in **Chapter 4**, strategies are also being implemented or are planned for outside of the PFAs by the stakeholders listed below. These strategies will also help to reduce the nitrate loading to the Upper Wakulla River and Wakulla Springs.

5.1 AGRICULTURE

In the portion of the Upper Wakulla River and Wakulla Springs Basin located outside of the PFAs, there is approximately 58,468.32 acres of non-forestry agricultural land uses, of which 5,898.71 acres or 10.1% are enrolled in FDACS BMP programs as of June 30, 2013 (see **Table 18** and **Figure 13**). During the first BMAP iteration, FDACS will continue to enroll additional producers in BMPs, to the extent possible. Refer to **Section 4.1.4** regarding agricultural BMP enrollment within the PFAs for additional information on agricultural land use and FDACS enrollment goals.

TABLE 18: AGRICULTURAL LAND USE ACREAGE BMAP ENROLLMENT OUTSIDE OF THE PFAS AS OF JUNE 30, 2013

N/A = Not applicable

¹ Enrollment numbers will depend on the ability of field staff to identify and locate producers, and whether producers choose to implement BMPs or monitor their water quality. Also, specific agricultural land uses and number of agricultural operations may change from year to year. Progress on enrollment, based on the best available information, will be included in the BMAP annual progress reports.

2009 NFWMD LAND USE	ACRES ¹	RELATED FDACS BMP PROGRAMS	ACREAGE ENROLLED	RELATED NOTICES OF INTENT
Pasture and Rangeland	26,894.80	Cow/Calf	1,679.57	6
Row/Field/Mixed Crops	11,775.52	Vegetable/Agronomic Crops	1,467.30	3
Hay Fields	13,926.93	Vegetable/Agronomic Crops Revision (Future)	N/A	N/A
Fallow Crop Land	821.32	N/A	N/A	N/A
Horse Farm	1,298.26	Equine	0.00	N/A
Other Groves	475.53	Specialty Fruit and Nut	0.00	N/A
Nurseries and Vineyards	102.96	Future Nursery, Specialty Fruit and Nut	0.00	N/A
Tree Nurseries	155.11	Future Nursery, Specialty Fruit and Nut	0.00	N/A
Ornamentals	1,629.87	Container Nursery	2,751.84	6
Sod Farms	1,260.62	Statewide Sod	0.00	N/A
Specialty Farms	48.67	Conservation Plan Rule	0.00	N/A
Cattle Feeding	55.15	Conservation Plan Rule	0.00	N/A
Poultry Feeding	23.58	Conservation Plan Rule	0.00	N/A
TOTAL	58,468.32	N/A	5,898.71	15

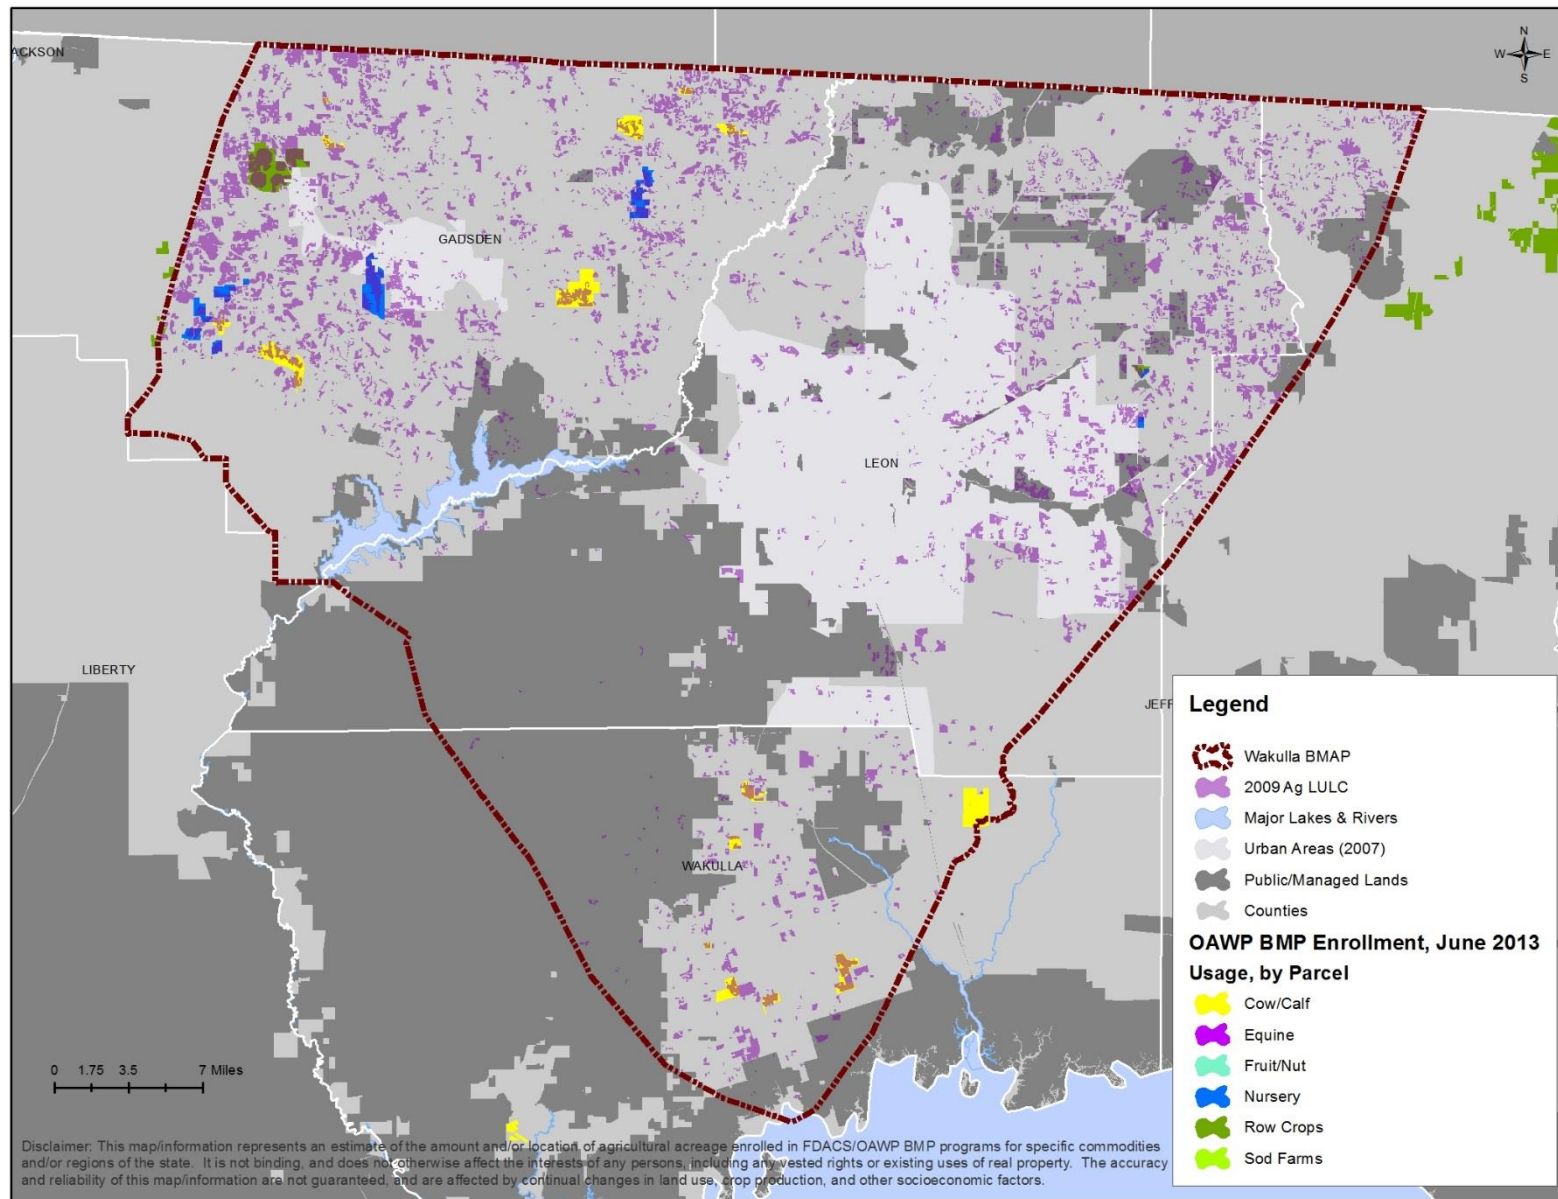


FIGURE 13: AGRICULTURAL LANDS ENROLLED IN BMPs OUTSIDE OF THE PFAs, AS OF JUNE 2013

5.2 CITY OF GRETNA MANAGEMENT STRATEGIES

The City of Gretna does not apply fertilizer on any city-owned property. The city's management strategies are summarized in **Table 19**.

TABLE 19: CITY OF GRETNA MANAGEMENT STRATEGIES OUTSIDE OF THE PFAs

NUMBER	NAME	DESCRIPTION	STATUS	CATEGORY
CG-1	No Fertilizer Use	Fertilizer is not applied on any city-owned property.	Ongoing	Residential Fertilizer

5.3 CITY OF QUINCY MANAGEMENT STRATEGIES

The City of Quincy's WWTF is at AWT. The city has an ordinance that requires minimum stormwater treatment levels and the use of BMPs, including slow release fertilizers. In addition, the city conducts street sweeping on a weekly basis. The City of Quincy's strategies are summarized in **Table 20**.

TABLE 20: CITY OF QUINCY MANAGEMENT STRATEGIES OUTSIDE OF THE PFAs

NUMBER	NAME	DESCRIPTION	STATUS	CATEGORY
CQ-1	City of Quincy WWTF	AWT at the WWTF.	Completed	WWTF
CQ-2	Land Development Code – Watershed Conservation Measures	Ordinance that requires minimum stormwater treatment levels and use of BMPs including slow release fertilizers.	Ongoing	Residential Fertilizer/ Stormwater
CQ-3	Street Sweeping	Sweeping the streets in the south side of the city one week and the north side the next week.	Ongoing	Stormwater

5.4 FAMU MANAGEMENT STRATEGIES

As part of FAMU's MS4 activities, the school implements several management strategies to address stormwater including:

- *Campus-wide letter to all students and staff on stormwater practices.*
- *Website about stormwater activities.*
- *Public service announcements on the FAMU public radio station about the effects of illicit discharges and illegal disposal of waste.*
- *Education about stormwater practices at athletic events and student activities.*
- *Stormwater system mapping.*
- *Illicit discharge screening.*
- *Stormwater system inspections and maintenance.*
- *Street sweeping.*

FAMU's management strategies are summarized in **Table 21**.

TABLE 21: FAMU MANAGEMENT STRATEGIES OUTSIDE OF THE PFAS

NUMBER	NAME	DESCRIPTION	STATUS	CATEGORY
FAMU-1	NPDES MS4 Permit	Stormwater system maintenance and education.	Ongoing	Stormwater

5.5 FEDERAL CORRECTIONAL INSTITUTION, TALLAHASSEE MANAGEMENT STRATEGIES

The Federal Correctional Institution, Tallahassee maintains approximately 255 catch basins/stormwater drains that make up the MS4 system. These catch basins/stormwater drains are inspected quarterly. In addition, no fertilizer is applied on the facility grounds. The Federal Correctional Institution, Tallahassee's management strategies are summarized in **Table 22**.

TABLE 22: FEDERAL CORRECTIONAL INSTITUTION, TALLAHASSEE MANAGEMENT STRATEGIES OUTSIDE OF THE PFAS

NUMBER	NAME	DESCRIPTION	STATUS	CATEGORY
FCI-1	NPDES MS4 Permit	Stormwater system inspection and maintenance.	Ongoing	Stormwater
FCI-2	No Fertilizer Use	Fertilizer is not applied on facility grounds.	Ongoing	Fertilizer

5.6 FSU MANAGEMENT STRATEGIES

FSU has a fertilizer rule in its University Master Plan that requires the use of slow release fertilizers and/or carefully managed fertilizer application times to minimize leaching of nutrients to the ground water. Dehydrated cow manure with a 2-1-2 analysis is used when planting, and a 15-0-15 mix with half the nitrogen water insoluble is used twice a year on the turf grass in high priority areas, such as athletic fields.

Through the MS4 permit, FSU also implements several management strategies to address stormwater including:

- *Newsletter distributed several times per year to all faculty and staff through the mail and also available electronically.*
- *Website about stormwater activities: <http://www.safety.fsu.edu/environmental.html>.*
- *On-campus public service announcements.*
- *Base map of the entire campus stormwater drainage system.*
- *Illicit discharge policies.*
- *Stormwater hotline for faculty, staff, students, and visitors to report potential violations.*

- Litter control and grounds maintenance.

FSU's management strategies are summarized in **Table 23**.

TABLE 23: FSU MANAGEMENT STRATEGIES OUTSIDE OF THE PFAS

NUMBER	NAME	DESCRIPTION	START DATE	STATUS	CATEGORY
FSU-1	Fertilizer Rule in the University Master Plan	Use slow release fertilizers and/or carefully managed fertilizer applications time to ensure maximum root uptake and minimal surface water runoff or leaching to ground water.	2008	Ongoing	Fertilizer
FSU-2	NPDES MS4 Permit	Stormwater system maintenance and education.	Not applicable	Ongoing	Stormwater

5.7 GADSDEN COUNTY MANAGEMENT STRATEGIES

Gadsden County has a Comprehensive Plan policy that requires a 100 foot setback for OSTDS from surface waters and wetlands, which helps to minimize loading from OSTDS to surface waterbodies. The county also has a policy that requires water and sewer connection for any new development that occurs within 0.25 miles of available service, which will assist reducing the number of OSTDS that will be installed in the future in the areas of central sewer connection. In addition, the county has a policy that requires a 50 foot natural buffer around jurisdictional wetlands, rivers, creeks, streams and lakes. Gadsden County has adopted minimum procedures, policies and design standards to manage stormwater runoff, known as the Gadsden County Stormwater Policy and Procedures Manual. The county's stormwater pollution abatement requirements are increased by 50% (1.5 times the normal treatment requirements) for facilities discharging into waterways and waterbodies recognized by the state as requiring special protection. Gadsden County's management strategies are summarized in **Table 24**.

TABLE 24: GADSDEN COUNTY MANAGEMENT STRATEGIES OUTSIDE OF THE PFAS

NUMBER	NAME	DESCRIPTION	STATUS	CATEGORY
GC-1	Comprehensive Plan Policy 4.5.1 and 5.2.11 in the Infrastructure and Conservation Element	Requires 100 foot setback for OSTDS from wetlands, creeks, streams, lakes, etc.	Ongoing	OSTDS
GC-2	Comprehensive Plan Policy 5.2.4 and 5.2.11 in the Conservation Element	Requires 50 foot natural buffer around all jurisdictional wetlands.	Ongoing	Protection Measure
GC-3	Comprehensive Plan Infrastructure Element	Water and sewer connection required for new development within 0.25 miles of available service.	Ongoing	Wastewater
GC-4	Section 3.4 Special Drainage Basins - Water Quality (Pollution Abatement) in the Stormwater Policies and Procedures Manual	Requires 1.5 times normal treatment requirement.	Ongoing	Stormwater

5.8 TALQUIN ELECTRIC COOPERATIVE MANAGEMENT STRATEGIES

Talquin Electric Cooperative completed a project on Highway 267 to add central sewer, which eliminated OSTDS for an existing motel and two future hotels. Talquin also added a sewer system

along Beech Ridge Trail in Leon County, which removed 12 homes from OSTDS. Talquin is currently in the process of abandoning the Oyster Bay Wastewater Treatment Plant (WWTP) to remove this plant's discharge from the coastal area. The sewer collection system that is associated with this WWTP will be connected to Wakulla County's WWTF. Talquin is also looking to obtain funding to upgrade the Gadsden East WWTP to add a treatment wetland, which would result in zero effluent discharge from this facility. Talquin's management strategies are summarized in **Table 25**.

TABLE 25: TALQUIN ELECTRIC COOPERATIVE MANAGEMENT STRATEGIES OUTSIDE OF THE PFAs

* The estimated reductions are based on the amount of TN applied to the land surface and do not represent the nitrate loading to ground water.

NUMBER	NAME	DESCRIPTION	ESTIMATED COST	COMPLETION DATE	STATUS	ESTIMATED TN REDUCTION*	CATEGORY
TEC-1	Oyster Bay WWTP abandonment	Decommissioned to connect coastal area sewer system to Wakulla County's sewer system in effort to move WWTP away from coastal areas.	\$750,000	9/1/2013	Construction	100%	Wastewater
TEC-2	Gadsden East WWTP	Construct a treatment wetland by retrofitting three existing rapid infiltration basins and building additional treatment cells, so the wetland has zero effluent discharge. The wetland's nitrogen reduction will be achieved through the natural wetland process and will require very little energy for operation and maintenance.	\$200,000	12/31/2013	Planned; seeking funding	98%	Wastewater
TEC-3	Highway 267 Sewer	Partnership with Gadsden County, and City of Quincy to provide a central sewer system to the Highway 267/I-10 interchange for existing motel and two future hotels eliminating OSTDS.	\$400,000	06/2008	Completed	80%	Wastewater
TEC-4	Beech Ridge Trail Sewer	Sewer system along Beech Ridge Trail to remove approximately 12 homes from OSTDS.	\$40,000	12/2004	Completed	80%	Wastewater
TOTAL	N/A	N/A	\$1,390,000	N/A	N/A	N/A	N/A

5.9 TCC MANAGEMENT STRATEGIES

In spring 2012, TCC stopped applying fertilizer on the main campus. The previous applications were between 2,000 and 2,400 pounds of 18-0-18 fertilizer to the centipede sod throughout the campus each spring. In addition, TCC cut the amount of fertilizer used on the athletic fields in half. The new application rate is 300 pounds of fertilizer on the baseball field and 100 pounds of fertilizer on the softball and intramural fields, which is applied three times per year. TCC will continue this reduction in fertilizer application on the main campus and athletic fields. TCC's management strategies are summarized in **Table 26**.

TABLE 26: TCC MANAGEMENT STRATEGIES OUTSIDE OF THE PFAS

NUMBER	NAME	DESCRIPTION	START DATE	STATUS	CATEGORY
TCC-1	Fertilizer Cessation	Cessation of fertilizer application on the main campus and reduction of application on the athletic fields by half.	12/2012	Ongoing	Residential Fertilizer

5.10 TOWN OF HAVANA MANAGEMENT STRATEGIES

The Town of Havana conducts quarterly sweeping of all the streets within the town limits, which helps to reduce the amount of pollutants that runoff from the roads. The Town of Havana's management strategies are summarized in **Table 27**.

TABLE 27: TOWN OF HAVANA MANAGEMENT STRATEGIES OUTSIDE OF THE PFAS

NUMBER	NAME	DESCRIPTION	STATUS	CATEGORY
TH-1	Street Sweeping	Quarterly street sweeping of all town roads.	Ongoing	Stormwater

Chapter 6: ASSESSING PROGRESS AND MAKING CHANGES

Successful BMAP implementation requires commitment and follow-up. In the commitment to plan implementation (see **Section 6.5**), stakeholders have expressed their intention to carry out the plan, monitor its effect, and continue to coordinate within and across jurisdictions to achieve water quality targets. Stakeholders have committed and are required to implement the assigned projects and activities within the first five-year phase of this BMAP. The FWRA requires that an assessment be conducted every five years to determine whether there is reasonable progress in achieving pollutant load reductions. This chapter contains the water quality monitoring component sufficient to make this evaluation.

6.1 TRACKING IMPLEMENTATION

The Department will work with the stakeholders to track project implementation and organize the monitoring data collected each year. The project and monitoring information will be presented in an annual report. In addition to activities for the OSTDS Initiative, the Upper Wakulla River and Wakulla Springs stakeholders have agreed to meet approximately every 12 months after the adoption of the BMAP to follow up on plan implementation, share new information, and continue to coordinate on TMDL-related issues. The following types of activities may occur at annual meetings:

– *Implementation Data and Reporting* –

- Collect project implementation information from the stakeholders, MS4 permit reporting, WWTF upgrade plans, and FDACS agricultural BMP enrollment and compare with the BMAP schedule.
- Discuss the data collection process, including any concerns and possible improvements to the process.
- Review the monitoring plan implementation, as detailed in **Section 6.3**.

– *Sharing New Information* –

- Report on results from water quality and biological monitoring and trend information.
- Provide updates on new management strategies in the basin that will help reduce nutrient loading.
- Identify and review new scientific developments on addressing nutrient loads and incorporate any new information into annual progress reports.

- *Coordinating TMDL-Related Issues* –
 - Provide updates from the Department on the basin cycle and activities related to any impairments, TMDLs, and BMAP.
 - Obtain reports from other basins where tools or other information may be applicable to the Upper Wakulla River and Wakulla Springs TMDL.

Covering all of these topics is not required for the annual meetings, but this list provides examples of the types of information that should be considered for the agenda to assist with BMAP implementation and improve coordination among the agencies and stakeholders.

6.2 ADAPTIVE MANAGEMENT MEASURES

Adaptive management involves setting up a mechanism for making adjustments in the BMAP when circumstances change or feedback indicates the need for a more effective strategy. Adaptive management measures include the following:

- *Procedures to determine whether additional cooperative strategies are needed.*
- *Criteria/processes for determining whether and when plan components need revision due to changes in costs, environmental impacts, social effects, watershed conditions, or other factors.*
- *Descriptions of the stakeholders' role after BMAP completion.*

Key components of adaptive management to share information and expertise are tracking plan implementation, monitoring water quality and pollutant loads, and holding periodic meetings. BMAP execution will be a long-term process, and some projects will extend beyond the first BMAP phase. For example, during the first iteration, the OSTDS Initiative will be implemented to identify what strategies are most applicable to the basin to reduce nitrate loading, determine a timeline for future strategies, and identify which stakeholders are responsible for implementing the necessary strategies in the next BMAP iteration.

The Department and the stakeholders will track implementation efforts and monitor water quality to measure effectiveness and ensure BMAP compliance. The stakeholders will meet approximately every 12 months to discuss implementation issues, consider new information, and, if the basin is not projected to meet the TMDL, determine additional corrective actions. Information on management strategies

implementation will be collected annually from the participating entities and organized into reports. The stakeholders will review these reports to assess progress towards meeting the BMAP goals.

6.3 WATER QUALITY MONITORING

6.3.1 MONITORING OBJECTIVES

Focused objectives are critical for a monitoring strategy to provide the information needed to evaluate implementation success. The primary objectives of the monitoring strategy for the Upper Wakulla River and Wakulla Springs Basin are described below, and will be used to evaluate the success of the BMAP:

- *Track trends in nitrate concentrations and loads in the Upper Wakulla River and Wakulla Springs.*
- *Track trends in the biological communities in the Upper Wakulla River.*

6.3.2 WATER QUALITY MONITORING PARAMETERS, FREQUENCY, AND NETWORK

To achieve the first objective above, the monitoring strategy focuses on collecting the suggested parameters included in **Table 28** for the river sites and **Table 29** for the spring vent and conduit sites. The core parameters are directly related to the impairment in the Upper Wakulla River and Wakulla Springs Basin. Supplemental parameters and field parameters are monitored primarily to support the interpretation of core water quality parameters. At a minimum, the core parameters will be tracked to determine progress towards meeting the TMDL.

TABLE 28: WATER QUALITY MONITORING PARAMETERS FOR THE RIVER SITES

- = Empty cell/no data

CORE PARAMETERS	SUPPLEMENTAL PARAMETERS	FIELD PARAMETERS
Nitrate + Nitrite (as N)	Chlorophyll-a	Water Temperature
Ammonia (as N)	Total Organic Carbon	pH
Kjeldahl Nitrogen	Total Phosphorous	Specific Conductance
-	Chloride	Dissolved Oxygen
-	Sulfate	Sample Depth
-	Fluoride	Secchi Depth
-	Calcium	-
-	Magnesium	-
-	Sodium	-
-	Potassium	-
-	Alkalinity	-
-	Hardness	-
-	Turbidity (lab)	-
-	Specific conductance (lab)	-
-	Color (true)	-
-	Total Suspended Solids	-
-	Total Dissolved Solids	-

TABLE 29: WATER QUALITY MONITORING PARAMETERS FOR THE SPRING VENT AND CONDUIT SITES

- = Empty cell/no data

CORE PARAMETERS	SUPPLEMENTAL PARAMETERS	FIELD PARAMETERS
Nitrate + Nitrite (as N)	Sucralose	Water Temperature
Ammonia (as N)	Nitrogen Isotopes	pH
Kjeldahl Nitrogen	Oxygen Isotopes	Specific Conductance
-	Total Phosphorous	Dissolved Oxygen
-	Ortho-Phosphate (as P)	Sample Depth
-	Organic Carbon	-
-	Dissolved Solids	-
-	Suspended Solids	-
-	Turbidity	-
-	Color (true)	-
-	Boron	-
-	Calcium	-
-	Magnesium	-
-	Sodium	-
-	Potassium	-
-	Chloride	-
-	Sulfate	-
-	Fluoride	-
-	Alkalinity	-

Table 30 lists the water quality stations that are included in the BMAP monitoring network, which are sampled by NFWFMD and the Department. The water quality monitoring will be conducted in accordance with the frequencies below.

In addition, flow stations are listed in **Table 30** to help determine loads to the river to achieve the first objective. These flow stations are maintained by the U.S. Geological Survey (UGGS) and FGS. The flow stations in the monitoring network are also shown in **Figure 14**. The Spring Creek flow station is included in the BMAP monitoring plan because it will be helpful in understanding the movement of water in the aquifer. This gage will provide the ability to create a correlation between Spring Creek Springs flow volumes and periods of reverse flows at Spring Creek to flows and water chemistry at the Wakulla Springs vent, which could help the stakeholders determine where to place management strategies in the future. The gage will also provide information expected to support NFWFMD in setting the minimum flows and levels for the Wakulla River.

TABLE 30: BMAP WATER QUALITY MONITORING NETWORK

SAMPLING ENTITY	STATION ID	STATION NAME	STATION TYPE	FREQUENCY	SITE ESTABLISHED
NFWFMD	S587	Spring Vent	Recorder – discharge	15-minute	05/1997
NFWFMD	S587	Spring Vent	Water quality vent	Quarterly	04/2000

SAMPLING ENTITY	STATION ID	STATION NAME	STATION TYPE	FREQUENCY	SITE ESTABLISHED
NFWFMD	S266	Upper Bridge	Water quality river	Monthly	08/2009
NFWFMD	S556	Recreation Area Boat Dock	Water quality river	Monthly	10/2013
NFWFMD	S556	Recreation Area Boat Dock	Recorder – temperature, conductance	Hourly	03/1999
NFWFMD	S98	Boat Maintenance Tram	Recorder – stage	5-minute	12/1987
Department	9695	Spring Vent	Water quality vent	Quarterly	09/2001
Department	20383	B-Tunnel	Water quality conduit	Quarterly	04/2004
Department	20385	C-Tunnel	Water quality conduit	Quarterly	04/2004
Department	20387	D-Tunnel	Water quality conduit	Quarterly	04/2004
Department	20388	AD-Tunnel	Water quality conduit	Quarterly	04/2004
Department	20340	K-Tunnel	Water quality conduit	Quarterly	04/2004
Department	20381	AK-Tunnel	Water quality conduit	Quarterly	04/2004
Department	S556	Recreation Area Boat Dock	Nitrate Meter	Continuous	12/2013 (projected)
USGS	02327022	Wakulla River Near Crawfordville, FL	Flow	Continuous	10/2004
FGS	B_TUNNEL	B-Tunnel	Flow	15-Minute	12/2003
FGS	C_TUNNEL	C-Tunnel	Flow	15-Minute	12/2003
FGS	D_TUNNEL	D-Tunnel	Flow	15-Minute	02/2004
FGS	AD_TUNNEL	AD-Tunnel	Flow	15-Minute	02/2004
FGS	K_TUNNEL	K-Tunnel	Flow	15-Minute	02/2004
FGS	AK_TUNNEL	AK-Tunnel	Flow	15-Minute	02/2004
USGS	02327031	Spring Creek Gage	Flow	Continuous	10/2013

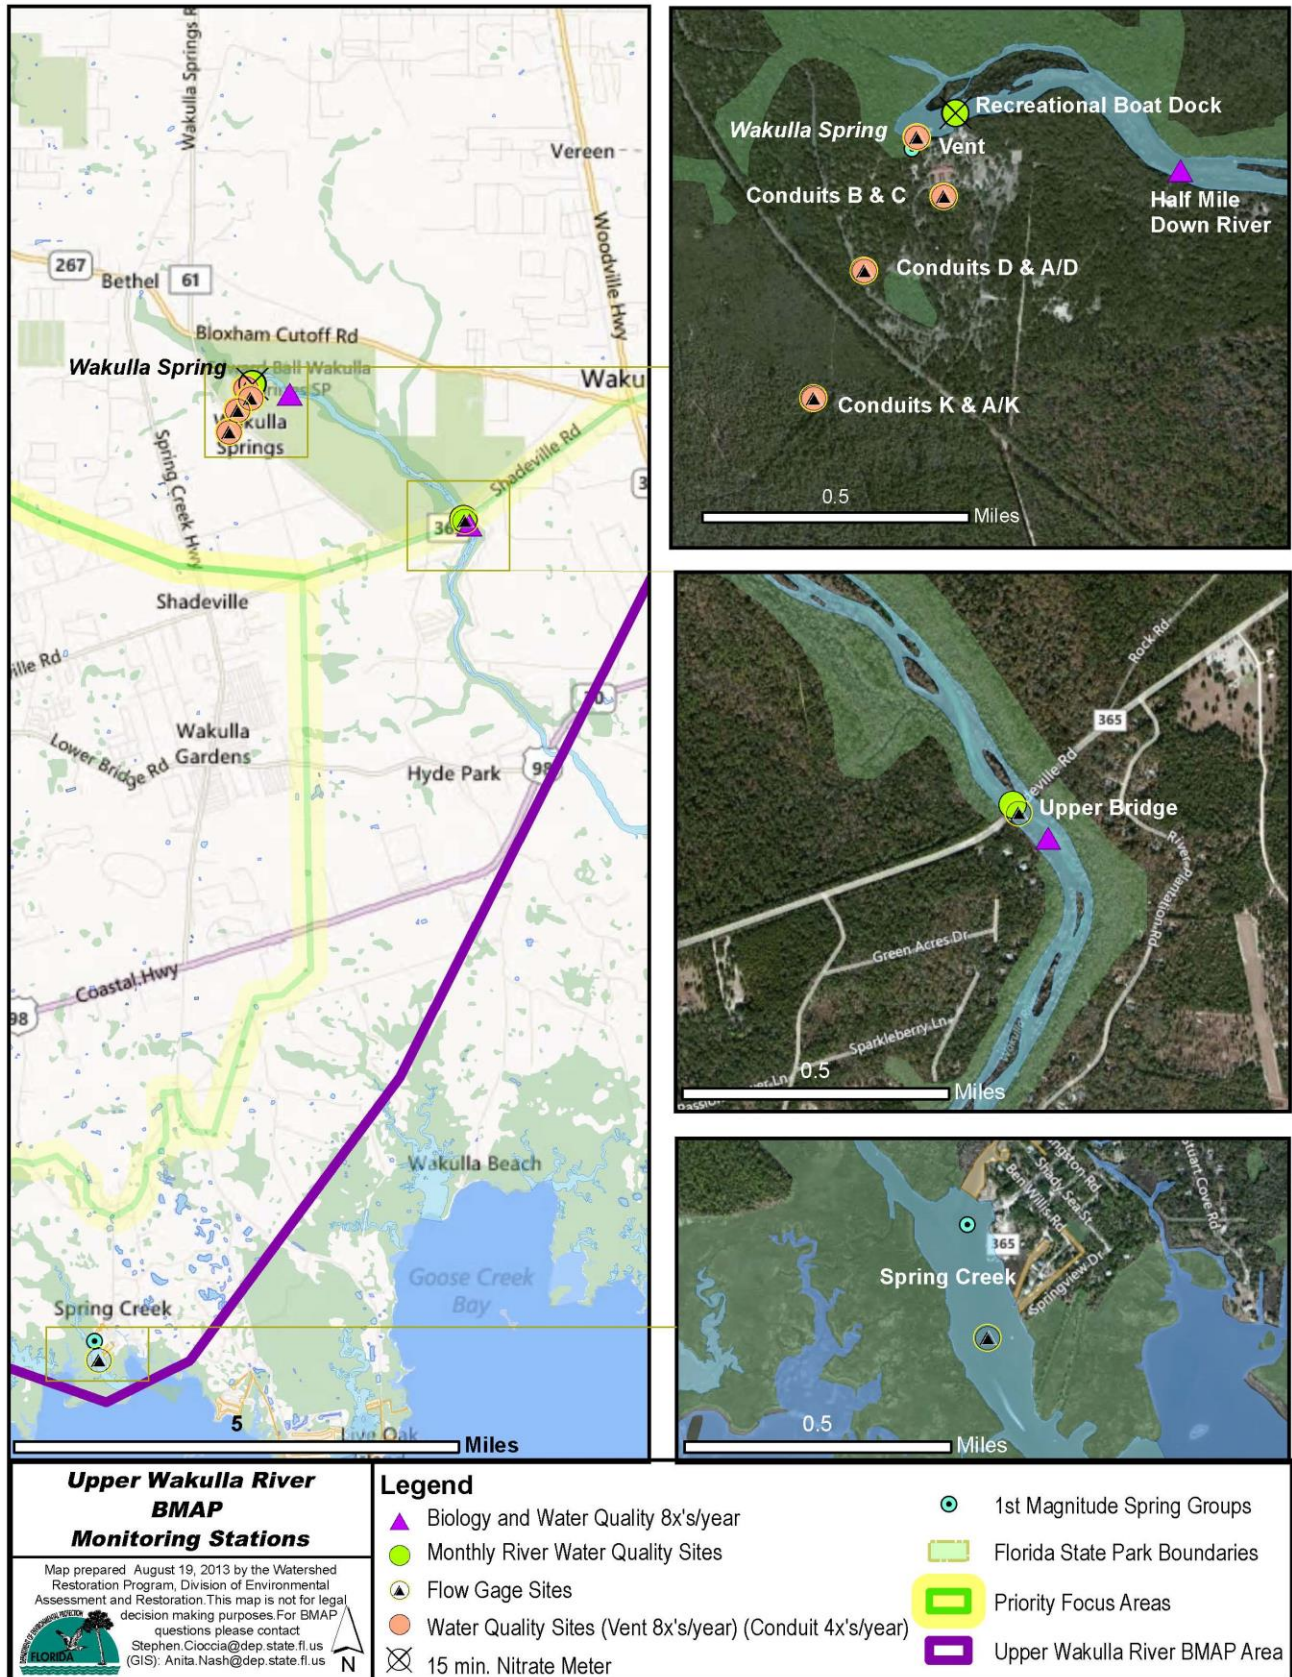


FIGURE 14: MONITORING NETWORK FOR THE UPPER WAKULLA RIVER AND WAKULLA SPRINGS

6.3.3 BIOLOGICAL MONITORING

To meet the second monitoring plan objective, several types of biological monitoring will occur to assess the health of the Upper Wakulla River. RPS will be conducted to assess the abundance and variety of algae in the river. The linear vegetation survey (LVS) will be conducted to assess the types and density of vegetation present in the river and to identify the native versus non-native species. SCI will be conducted to measure the number of different organisms present in the river. In addition, habitat assessments (HA) will be conducted to assess the river conditions and habitat present to support the SCI evaluation. Water quality samples will also be collected with the biological monitoring. The biological monitoring is summarized in **Table 31** and the locations for this sampling are shown in **Figure 14**.

TABLE 31: BIOLOGICAL MONITORING

SAMPLING ENTITY	TYPE OF MONITORING	LOCATION	FREQUENCY	START DATE
NWFWMD	RPS	200 meters Downstream of Upper Bridge	Twice per year	10/2013
NWFWMD	LVS	200 meters Downstream of Upper Bridge	Twice per year	10/2013
NWFWMD	SCI	200 meters Downstream of Upper Bridge	Twice per year	10/2013
NWFWMD	HA	200 meters Downstream of Upper Bridge	Twice per year	10/2013
Department	RPS	200 meters Downstream of Upper Bridge	Twice per year	01/2014
Department	LVS	200 meters Downstream of Upper Bridge	Twice per year	01/2014
Department	SCI	200 meters Downstream of Upper Bridge	Twice per year	01/2014
Department	HA	200 meters Downstream of Upper Bridge	Twice per year	01/2014
NWFWMD	RPS	Half Mile Downstream of Spring Vent	Twice per year	10/2013
NWFWMD	LVS	Half Mile Downstream of Spring Vent	Twice per year	10/2013
NWFWMD	SCI	Half Mile Downstream of Spring Vent	Twice per year	10/2013
NWFWMD	HA	Half Mile Downstream of Spring Vent	Twice per year	10/2013
Department	RPS	Half Mile Downstream of Spring Vent	Twice per year	01/2014
Department	LVS	Half Mile Downstream of Spring Vent	Twice per year	01/2014
Department	SCI	Half Mile Downstream of Spring Vent	Twice per year	01/2014
Department	HA	Half Mile Downstream of Spring Vent	Twice per year	01/2014

6.3.4 DATA MANAGEMENT AND ASSESSMENT

The Florida Storage and Retrieval (STORET) database serves as the primary repository of ambient water quality data for the state of Florida. The Department pulls water quality data used for impaired water evaluations and TMDL development directly from the STORET database. Ambient water quality data collected as part of the BMAP will be uploaded into STORET for long-term storage and availability. Water quality data will be uploaded to STORET at least once every six months, upon completion of the appropriate quality assurance/quality control checks.

The biological data will be stored in SBIO, which is also a Department database. The biological data will be uploaded at least once every six months, after the appropriate quality assurance/quality control checks.

The water quality and biological data will be analyzed during BMAP implementation to determine trends in water quality and the health of the biological community. A wide variety of statistical methods is available for the water quality trend analyses. The selection of an appropriate data analysis method depends on the frequency, spatial distribution, and period of record available from existing data. Specific statistical analyses were not identified during BMAP development; however, commonly accepted methods of data analysis will be used that are consistent with the TMDL model.

6.3.5 QUALITY ASSURANCE/QUALITY CONTROL

Stakeholders participating in the monitoring plan must collect water quality data in a manner consistent with the Department's standard operating procedures for quality assurance/quality control. The most current version of these procedures can be downloaded from <http://www.dep.state.fl.us/water/sas/sop/sops.htm>. For BMAP-related data analyses, entities should use National Environmental Laboratory Accreditation Conference National Environmental Laboratory Accreditation Program–certified laboratories (<http://www.dep.state.fl.us/labs/cgi-bin/aams/index.asp>) or other labs that meet the certification and other requirements outlined in the standard operating procedures.

6.4 RESEARCH STUDIES

During the BMAP process, the stakeholders identified several research items they would like to pursue, if funding becomes available. These research topics include the following:

- *Determine the nitrate contributions to Wakulla Springs during the reverse flow scenario where portions of the Spring Creek springshed flow to Wakulla Springs using data collected by NWFWMD and by potentially increasing the frequency of monitoring in the conduits that reverse flow.*
- *Conduct a dye trace study in Crawfordville to determine the contributions from septic systems during the reverse flow scenario where portions of the Spring Creek springshed flow to Wakulla Springs.*
- *Evaluate the drinking water well data to identify wells with high nitrate concentrations and conduct further research to determine the source(s) of these high concentrations.*
- *Update the potentiometric surface data for the basin to better define the boundary, which will likely be performed for NWFWMD's minimum flows and levels modeling.*

- *Run the AVA model for the entire BMAP basin, and incorporate the Light Detecting and Ranging (LIDAR) data from Wakulla County.*
- *Verify the effectiveness of agricultural BMPs in the Upper Wakulla River and Wakulla Springs Basin.*
- *Monitor before and after project implementation, as desired, to determine the nitrate reduction benefits of the projects.*
- *Add nitrate data loggers to the river water quality sampling locations (upper bridge and recreation area boat dock) to obtain better information about how nitrate concentrations change in the river.*
- *Develop a water budget and nutrient transport model for the Upper Wakulla River and Wakulla Springs Basin.*
- *Determine the effects of saltwater intrusion and sea level rise on the biological community in the Upper Wakulla River and Wakulla Springs.*
- *Measure color, using ultraviolet-visible light absorption spectrophotometry, in the Upper Wakulla River to determine the effects on water quality and the biological community.*
- *Create an Aquifer Watch program for the Upper Wakulla River and Wakulla Springs Basin to gather additional water quality data for ground water in the basin.*
- *Assess the nitrate contributions to ground water from sinkholes in the basin.*

6.5 COMMITMENT TO PLAN IMPLEMENTATION

Paragraph 403.067(7), F.S., lays out the mechanisms for BMAP implementation. While the BMAP is linked by statute to permitting and other enforcement processes that target individual entities, successful implementation mandates that local stakeholders willingly and consistently work together to attain adopted TMDLs. This collaboration fosters the sharing of ideas, information, and resources. The stakeholders have demonstrated their willingness to confer with and support each other in their efforts.

APPENDICES

APPENDIX A: TMDL BASIN ROTATION SCHEDULE

TMDLs are developed, allocated, and implemented through a watershed management approach (managing water resources within their natural boundaries) that addresses the state’s 52 major hydrologic basins in five groups on a rotating schedule. **Table A-1** shows the hydrologic basins within each of the five groups, with the Department District office of jurisdiction.

TABLE A-1: MAJOR HYDROLOGIC BASINS BY GROUP AND DEPARTMENT DISTRICT OFFICE

DEPARTMENT DISTRICT	GROUP 1 BASINS	GROUP 2 BASINS	GROUP 3 BASINS	GROUP 4 BASINS	GROUP 5 BASINS
NW	Ochlockonee–St. Marks	Apalachicola–Chipola	Choctawhatchee–St. Andrews Bay	Pensacola Bay	Perdido Bay
NE	Suwannee	Lower St. Johns	Not applicable	Nassau–St. Marys	Upper East Coast
Central	Ocklawaha	Middle St. Johns	Upper St. Johns	Kissimmee	Indian River Lagoon
SW	Tampa Bay	Tampa Bay Tributaries	Sarasota Bay–Peace–Myakka	Withlacoochee	Springs Coast
S	Everglades West Coast	Charlotte Harbor	Caloosahatchee	Fisheating Creek	Florida Keys
SE	Lake Okeechobee	St. Lucie–Loxahatchee	Lake Worth Lagoon–Palm Beach Coast	Southeast Coast–Biscayne Bay	Everglades

Each group will undergo a cycle of five phases on a rotating schedule:

Phase 1: Preliminary evaluation of water quality.

Phase 2: Strategic monitoring and assessment to verify water quality impairments.

Phase 3: Development and adoption of TMDLs for waters verified as impaired.

Phase 4: Development of BMAP to achieve the TMDL.

Phase 5: Implementation of the BMAP and monitoring of results.

The Ochlockonee – St. Marks Basin is a Group 1 basin. As such, the Cycle 1 list of verified impaired waters was developed in 2002, the Cycle 2 list was developed in 2009, and the Cycle 3 list was developed in 2013. The Department will reevaluate impaired waters every five years to determine whether improvements are being achieved and to refine loading estimates and TMDL allocations using new data. If any changes in a TMDL are required, the applicable TMDL rule may be revised. Changes to a TMDL would prompt revisions to the applicable BMAP, which will be revisited at least every five years and modified as necessary, regardless of whether the TMDL is modified.

APPENDIX B: RULE 62-304(2), F.A.C., THE UPPER WAKULLA RIVER TMDL

(2) Upper Wakulla River. The nitrate TMDL to address the biological impairment is an in-stream monthly mean concentration of 0.35 mg/L and is allocated as follows:

(a) The WLA for wastewater sources is not applicable.

(b) The WLA for discharges subject to the Department's NPDES Municipal Stormwater Permitting Program is not applicable.

(c) The LAs for nonpoint sources are to address anthropogenic sources in the basin such that in-stream nitrate concentrations meet the TMDL target, which, based on the mean concentrations from the 2002-2007 period, will require a 56.2 percent reduction of nitrate at sources contributing to the observed biological impairment.

(d) The Margin of Safety is implicit.

(e) While the WLA and LAs for nitrate have been expressed as the concentration and percent reduction needed to attain the applicable Class III biology criterion, it is the combined reductions from both anthropogenic point and nonpoint sources that will result in the required reduction of in-stream nitrate concentrations. However, it is not the intent of the TMDL to abate natural background conditions.

APPENDIX C: CITY OF TALLAHASSEE STORMWATER TREATMENT PROJECTS IN THE UPPER WAKULLA RIVER AND WAKULLA SPRINGS BASIN

TABLE C-1: SUMMARY OF THE CITY OF TALLAHASSEE STORMWATER TREATMENT PROJECTS

PROJECT NAME	STATUS	PROJECT TYPE	MAP LABEL
Campus Circle	Complete	Wet detention with storm drain improvements	C2
Park Avenue Tributary #1 Stormwater Improvements	Active	Wet detention and channel stabilization	C3
Upper Lake Lafayette Nutrient Reduction Project	Active	Alum	C4
Pickett Court Area Stormwater	Complete	Not applicable	C5
Ford Street Drainage Improvements	Complete	Storm drain improvements	C6
Karen Lane Drainage Improvements	Complete	Storm drain improvements	C7
Emory Court And Dupont Drive Stormwater Improvements	Active	Channel stabilization	C8
Wilson Ridge Flood Relief	Complete	Storm drain improvements	C9
Killarney Way and Shamrock West Drainage Improvements	Active	Wet detention with storm drain improvements	C10
Northeast Ditch At Lonnbladh Road	Complete	Channel stabilization	C11
Chapel Drive Stormwater Improvements	Complete	Storm drain improvements	C13
Concord Road Stormwater Improvements	Active	Wet detention with storm drain improvements	C14
Frenchtown Stormwater Improvements Master Plan	Active	Wet detention with storm drain improvements	C15
Lafayette Park Outfall Phase II	Active	Storm drain improvements	C16
Lafayette Park Outfall Phase I	Complete	Dry detention	C17
East Georgia At Meridian Flood Mitigation	Complete	Storm drain improvements	C18
Lower Community Development District Erosion Control	Active	Channel stabilization	C20
Eastgate Flood Relief Project	Active	Channel stabilization with storm drain improvements	C21
Inglewood Stormwater Improvements	Active	Storm drain improvements	C22
Upper West Ditch Stormwater Facility	Active	To be determined	C23
Greenwood Stormwater Management Facility (part of Frenchtown Master Plan)	Active	Wet detention	C24
Royal Oaks Creek	Active	Channel stabilization	C25
Connie Drive Flooding	Active	Channel stabilization with storm drain improvements	C26
Call Street and Cadiz Stormwater Improvements	Active	Dry detention with storm drain improvements	C27
Meginnis Creek at Sharer Road	Active	Channel stabilization	C28
1046 Copper Creek Lane	Active	Conveyance Improvement	S1
1102 Tanner	Complete	Conveyance Improvement	S2
1103 Bonnie Drive	Complete	Conveyance Improvement	S3
1425 Devils Dip	Active	Conveyance Improvement	S5
1503 Spruce Avenue	Complete	Conveyance Improvement	S6
1829 Ivan Drive	Active	Conveyance Improvement	S7
2212 Eastgate Way	Complete	Conveyance Improvement	S9
2713 Bedford Way	Complete	Conveyance Improvement	S14
2764 Faringdon Drive	Complete	Conveyance Improvement	S15
2925 Edenderry Drive	Complete	Conveyance Improvement	S16
2945 Edenderry Drive (at Brandon Hill Drive)	Complete	Conveyance Improvement	S18
3015 Shamrock North	Active	Conveyance Improvement	S20
3068 O'Brien Drive	Complete	Conveyance Improvement	S22
3224 Baldwin Drive	Active	Conveyance Improvement	S23
3244 Shannon Lakes	Active	Conveyance Improvement	S24
3449 Mahoney Drive	Complete	Conveyance Improvement	S25
3933 Runnymede	Complete	Conveyance Improvement	S27

PROJECT NAME	STATUS	PROJECT TYPE	MAP LABEL
4052 Roscrea Drive	Active	Conveyance Improvement	S28
903 Beard Street	Active	Conveyance Improvement	S31
926 Millard Street	Complete	Conveyance Improvement	S32
Big Oak Street	Complete	Conveyance Improvement	S33
O'Brien and Grey Abbey Court	Complete	Conveyance Improvement	S34
Sandhurst Drive	Complete	Conveyance Improvement	S35
Shamrock North at Edenderry Drive	Complete	Conveyance Improvement	S36
Villages of Killearn/Kinsail	Complete	Conveyance Improvement	S38
Royal Oaks Phase I B	Complete	Conveyance Improvement	S39
2830 Cline Street	Complete	Conveyance Improvement	S40
314 Teal Lane	Complete	Conveyance Improvement	S41
4036 Brandon Hill Drive (Edenderry Drive)	Complete	Conveyance Improvement	S42
3703 Mockingbird Drive	Complete	Conveyance Improvement	S43
2407 Winthrop Road	Complete	Conveyance Improvement	S44
Trapnell Street (2818 McElroy)	Complete	Conveyance Improvement	S45
708 East Jefferson	Complete	Conveyance Improvement	S46
1543 Coleman	Complete	Conveyance Improvement	S47
3742 Shamrock	Complete	Conveyance Improvement	S48
4029 Brandon Hill	Complete	Conveyance Improvement	S49
Salmon Drive Ditch Lining (across 1706)	Complete	Conveyance Improvement	S51
Cypress Lake	Complete	Conveyance Improvement	S53
Ravine Drive	Complete	Conveyance Improvement	S54
Bay Shore Drive Stormwater Outfall	Complete	Conveyance Improvement	S55
551 Stonehouse Road	Complete	Conveyance Improvement	S56
Woodbern Lane	Complete	Conveyance Improvement	S57
Armistead Road	Complete	Conveyance Improvement	S58
519 Short Street	Active	Conveyance Improvement	S59
Limerick Drive Stormwater Outfall Improvements	Active	Conveyance Improvement	S60
Richardson Road	Active	Conveyance Improvement	S61
3907 Roswell Drive	Complete	Conveyance Improvement	S65
McGuire Pond	Complete	Pond Grading	S66
Bradford Road Stormwater Outfall	Active	Conveyance Improvement	S67

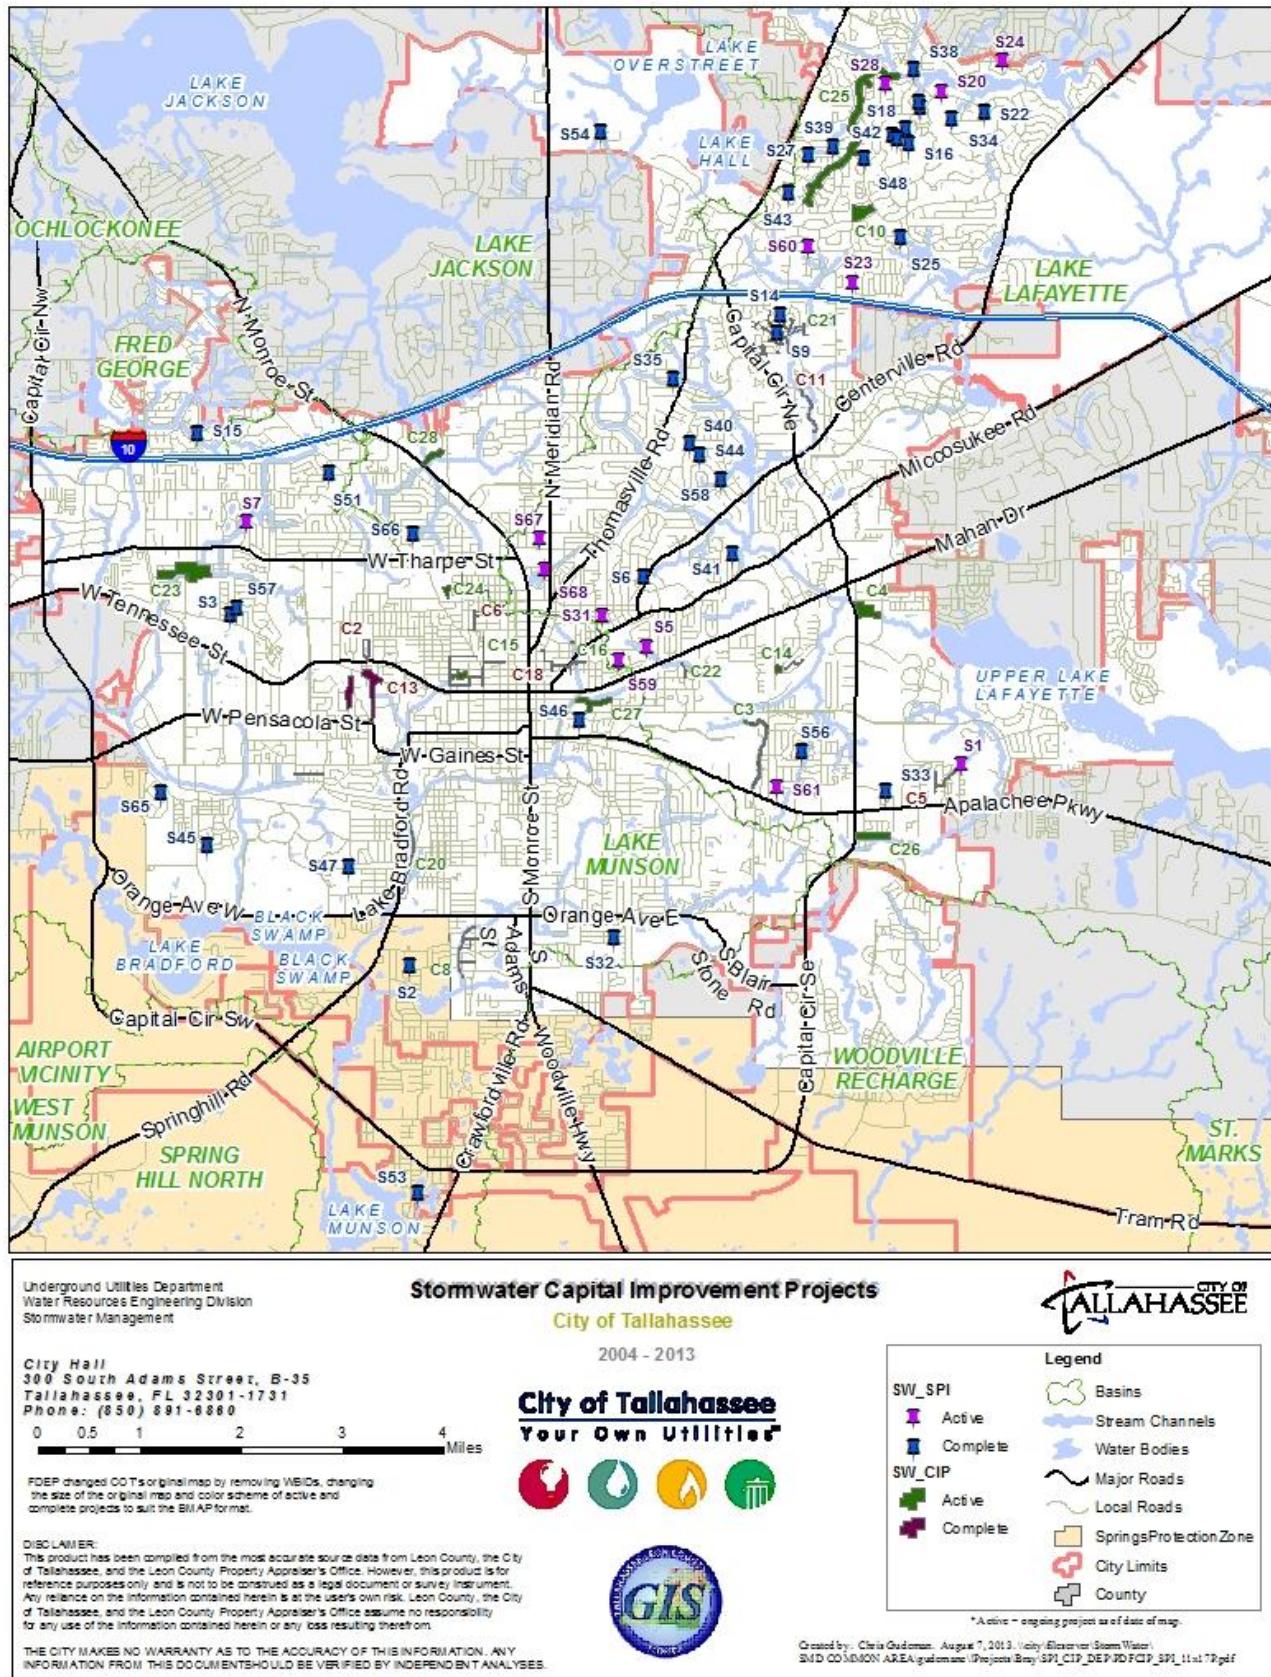


FIGURE C-1: LOCATION OF THE CITY OF TALLAHASSEE'S STORMWATER TREATMENT PROJECTS

APPENDIX D: POTENTIAL FUNDING SOURCES

A BMAP must identify feasible funding strategies for implementing the management strategies presented. This appendix provides a list of potential funding sources.

The **Clean Water State Revolving Fund (SRF) loan program** provides low-interest loans to local governments to plan, design, and build or upgrade wastewater, stormwater, and nonpoint source pollution prevention projects. Certain agricultural best management practices may also qualify for funding. Discounted assistance for small communities is available. Interest rates on loans are below market rates and vary based on the economic wherewithal of the community. The Clean Water SRF is Florida's largest financial assistance program for water infrastructure. More information is available at www.dep.state.fl.us/water/wff/cwsrf.

The **Drinking Water SRF loan program** provides low-interest loans to local governments and certain private utilities to plan, design, and build or upgrade drinking water systems. Discounted assistance for small communities may be available. Interest rates on loans are typically 40% below market rates. More information is available at www.dep.state.fl.us/water/wff/dwsrf.

The **Small Community Wastewater Facilities Grants Program** provides grants to fund the construction of wastewater facilities in municipalities with 10,000 or fewer people and per capita income levels below Florida's average per capita income. A local match is required. The program is linked to the Clean Water SRF loan program outlined above, and is highly competitive. More information is available at www.dep.state.fl.us/water/wff/cwsrf/smalcwgp.htm.

Florida's **Section 319 grant program** administers funds received from EPA to implement projects or programs that reduce nonpoint sources of pollution. Projects or programs must benefit Florida's priority watersheds ("impaired waters"), and local sponsors must provide at least a 40% match or in-kind contribution. Eligible activities include demonstration and evaluation of urban and agricultural stormwater BMPs, stormwater retrofits, and public education. More information is available at www.dep.state.fl.us/water/nonpoint/319h.htm.

Funding for projects related to the implementation of **Total Maximum Daily Load** determinations may be available through periodic legislative appropriations to the Department. When funds are available, the program prioritizes stormwater retrofit projects to benefit impaired waters, somewhat along the lines

of the Section 319 grant program listed above. More information is available at www.dep.state.fl.us/water/watersheds/tmdl_grant.htm.

The Florida Legislature may solicit applications directly for **Community Budget Issue Request** projects, including water projects, in anticipation of upcoming legislative sessions. This process is an opportunity to secure legislative sponsorship of project funding through the state budget. The Legislature may coordinate applications with the Department. In other years, the Legislature will not solicit projects but may include them in the budget in any event. You are advised to contact your local legislative delegation to determine whether there are opportunities available to fund your project. Information on contacting Senators and Representatives is available at www.leg.state.fl.us.

There are a number of other programs at both the state and federal levels that offer the possibility of water infrastructure funding. These include:

Florida Department of Economic Opportunity **Small Cities Community Development Block Grant Program** – Funds are available annually for water and sewer projects that benefit low- and moderate-income persons. Monies also may be available for water and sewer projects that serve a specific “job-creating entity” as long as most of the jobs created are for people with low or moderate incomes. For more information, visit <http://www.floridajobs.org/community-planning-and-development/assistance-for-governments-and-organizations/florida-small-cities-community-development-block-grant-program>.

Florida Rural Water Association Loan Program – This program provides low-interest bond or bank financing for community utility projects in coordination with the Department’s SRF programs discussed above. Other financial assistance may also be available. For more information, visit www.frwa.net/ and look for the links to “Funding” and “Long-Term Financing.”

Enterprise Florida – Enterprise Florida’s program is a resource for a variety of public and private projects and activities, including those in rural communities, to facilitate the creation, capital investment, and strengthening and diversification of local economies by promoting tourism, trade and economic development. The various Enterprise Florida programs and financial incentives are intended, among other things, to provide additional financial assistance to enable communities to better access other infrastructure funding programs. For more information, visit www.eflorida.com/; contact information is available from the “Contact Us” link at the top of the page.

Florida's **five regional water management districts** also offer financial assistance for a variety of water-related projects, for water supply development, water resource development, and surface water restoration. Assistance may be provided from ad valorem tax revenues or from periodic legislative appropriations for Alternative Water Supply Development and Surface Water Improvement and Management projects. The amount of funding available, matching requirements, and types of assistance may vary from year to year. For information on funding opportunities, contact the water management district with jurisdiction in your area—see www.dep.state.fl.us/secretary/watman for a map and links to each of the districts.

U.S. Department of Commerce **Economic Development Administration Public Works and Development Facilities Program** – The program provides funding to help distressed communities in economic decline revitalize, expand, and upgrade their physical infrastructure to attract new industry, encourage business expansion, diversify local economies, and generate or retain long-term, private sector jobs and investment. The program focuses on redeveloping existing infrastructure. For more information, visit www.eda.gov/investmentPriorities.htm.

U.S. Department of Agriculture **Rural Development Rural Utilities Service Guaranteed and Direct Loans and Grants** – This program provides a combination of loans and grants for water, wastewater, and solid waste projects to rural communities and small incorporated municipalities. Some nonprofit entities also may be eligible. For more information, visit http://www.rurdev.usda.gov/UWEP_HomePage.html.

Congress's **State and Tribal Assistance Grant Program** provides the opportunity to secure Congressional sponsorship of project funding, including water project funding, through the annual federal budget process. The program's stated purpose is to strengthen state, local governments, and tribal abilities to address environmental and public health threats while furthering environmental compliance. You may want to consider contacting your Representatives or Senators for assistance in pursuing funding; see <http://thomas.loc.gov/links/>.

Grants.gov at <http://www.grants.gov/>, which is the official federal website for information on more than 1,000 federal grant programs. The site includes an automatic email notification system for keeping apprised of federal grant opportunities.

Catalog of Federal Domestic Assistance at <http://www.cfda.gov/>, which provides a database of all federal programs available to state and local governments; public, quasi- public, and private profit and

nonprofit organizations and institutions; specialized groups; and individuals. There are a variety of sources of niche funding that may be appropriate to your situation. There are also private funding sources (endowments, private trusts, etc.) that may, on occasion, fund water-related projects; a variety of sources to investigate these opportunities are available on the web.

The **Florida Resource Directory** at <http://redi.state.fl.us/> provides a searchable directory of information about and links to many state and federal programs with resources available to help local communities. Funding for water-related projects is just one of many types of assistance identified here.

If you are interested in **disaster relief**, your first contacts should be to Florida's **Division of Emergency Management** at <http://www.floridadisaster.org/> or your county emergency management agency (see www.floridadisaster.org/fl_county_em.asp); and the **Federal Emergency Management Agency** at 1.800.621.FEMA (3362), or visit www.fema.gov/government/grant/pa/index.shtm, where the process for securing disaster-related infrastructure assistance begins.

APPENDIX E: BIBLIOGRAPHY OF KEY REFERENCES AND WEBSITES

KEY REFERENCES

Florida Department of Environmental Protection:

- 2001. *Basin status report: Ochlockonee and St. Marks*. Tallahassee, FL: Watershed Planning and Coordination Section, Bureau of Watershed Management.
- 2012a. *TMDL report: Nutrient (Biology) TMDL for the Upper Wakulla River (WBID 1006)*. Tallahassee, FL: Division of Water Resource Management, Bureau of Watershed Management.
- 2012b. Kincaid, Todd, Gareth Davies, Christopher Werner, and Rodney DeHan. *Demonstrating interconnection between a wastewater application facility and a first magnitude spring in a karstic watershed: Tracer study of the Southeast Farm Wastewater Reuse Facility, Tallahassee, Florida*. Tallahassee, FL: Florida Geological Survey.
- 2013a. Eller, Kirstin, Brian Katz, and Richard Hicks. *Wakulla Springs Basin Nitrogen Sourcing Inventory*. Tallahassee, FL: Ground Water Management Section. PowerPoint from: http://publicfiles.dep.state.fl.us/DEAR/BMAP/Upper%20Wakulla/04-Tech-Meeting_April-18-2013/Wakulla%20Nitrogen%20Project-K.ELLER.pdf.
- 2013b. Jackson, Joy. *Wakulla River Biological Assessments*. Tallahassee, FL: Standards and Assessment Section. PowerPoint from: http://publicfiles.dep.state.fl.us/DEAR/BMAP/Upper%20Wakulla/03-Tech-Meeting_March-28-2013/Wakulla%20River%20Biological%20Results_BMAP%20Meeting%20-%20Joy%20Jackson.pdf.
- 2013c. Katz, Brian. *Using Nitrogen Isotopes to Identify Sources of Nitrogen in the Wakulla Springs Basin*. Tallahassee, FL: Ground Water Management Section. PowerPoint from: http://publicfiles.dep.state.fl.us/DEAR/BMAP/Upper%20Wakulla/04-Tech-Meeting_April-18-2013/N-isotope-BK2_Wakulla-BMAP_B.KATZ.pdf.
- 2013d. Maddox, Gary. *Summary of Water Quality Data and the Existing Monitoring Network: Current & Recent Nitrate Trends in Wakulla Springs and River*. Tallahassee, FL: Ground Water Management Section. PowerPoint from: http://publicfiles.dep.state.fl.us/DEAR/BMAP/Upper%20Wakulla/03-Tech-Meeting_March-28-2013/GM%20Wakulla%20Nutrient%20Trends%20SHORT.pdf.

Baker, Alan E., Alex R. Wood, James R. Cichon, and Jay L. Johnson. July 2007. *The Leon County Aquifer Vulnerability Assessment*. Prepared for the Leon County Board of County Commissioners in fulfillment of Leon County Project No. BC-06-21-06-53.

Baker, Alan E., Alex R. Wood, and James R. Cichon. September 2009. *The Wakulla County Aquifer Vulnerability Assessment*. Prepared for the Florida Department of Environmental Protection as part of the Florida Aquifer Vulnerability Assessment (FAVA) Phase II Project, Contract No. RM059.

- Chelette, A., T.R. Pratt, and B.G. Katz. April 2002. *Nitrate loading as an indicator of nonpoint source pollution in the Lower St. Marks-Wakulla Rivers watershed*. Water Resources Special Report 02-1. Northwest Florida Water Management District.
- Harden H., Katz B., Griffin D., McMahon P., Wade, E., Hicks R., and Chanton J. *Fate of Effluent-Borne Contaminants Beneath Septic Tank Drainfields Overlying a Karst Aquifer*, Journal of Environmental Quality, March 18, 2010.
- Kincaid 2010. *Understanding Florida's Karst Results & Lessons Learned from the Woodville Karst Plain Research*. PowerPoint from:
http://geohydros.com/images/Pubs/geohydros_wswg_update_101115.pdf.
- Lombardo Associates, Inc. November 2011. *Onsite Sewage Treatment and Disposal and Management Options – Final Report for Wakulla Springs, Leon County, Wakulla County & City of Tallahassee, FL*. http://www.talgov.com/Uploads/Public/Documents/planning/pdf/compln/onsite_sewage_mgt_rpt.pdf
- Peer Review Committee. December 2005. *Degradation of Water Quality at Wakulla Springs, Florida: Assessment and Recommendations*. Report of the Peer Review Committee on the Workshop Solving Water Pollution Problems in the Wakulla Springshed of North Florida May 12-13, 2005. Tallahassee, Florida.

STORMWATER AND WATER QUALITY PROTECTION WEBSITES

TABLE E-1: LOCAL AND REGIONAL STORMWATER AND WATER QUALITY PROTECTION WEBSITES

SITE	WEBSITE LINK
NWFWMD	http://www.nwfwmd.state.fl.us/

TABLE E-2: STATE STORMWATER AND WATER QUALITY PROTECTION WEBSITES

SITE	WEBSITE LINK
General Portal for Florida	http://www.myflorida.com
Department	http://www.dep.state.fl.us/
Watershed Management	http://www.dep.state.fl.us/water/watersheds/index.htm
TMDL Program	http://www.dep.state.fl.us/water/tmdl/index.htm
BMPs, Public Information	http://www.dep.state.fl.us/water/nonpoint/pubs.htm
NPDES Stormwater Program	http://www.dep.state.fl.us/water/stormwater/npdes/index.htm
Nonpoint Source Funding Assistance	http://www.dep.state.fl.us/water/nonpoint/319h.htm
Surface Water Quality Standards	http://www.dep.state.fl.us/legal/Rules/shared/62-302/62-302.pdf
Identification of Impaired Surface Waters Rule	http://www.dep.state.fl.us/legal/Rules/shared/62-303/62-303.pdf
Ochlockonee and St. Marks Basin Assessment Report	http://www.dep.state.fl.us/water/basin411/stmarks/assessment.htm
STORET Program	http://www.dep.state.fl.us/water/storet/index.htm
Criteria for Surface Water Quality Classifications	http://www.dep.state.fl.us/water/wqssp/classes.htm
FDACS Office of Agricultural Water Policy	http://www.floridaagwaterpolicy.com/
FDACS Adopted Agricultural BMPs	http://www.floridaagwaterpolicy.com/BestManagementPractices.html
City of Tallahassee and Leon County Comprehensive Plan	http://www.talgov.com/planning/planning-compln-comp-plan.aspx
Wakulla County Comprehensive Plan	http://www.mywakulla.com/departments/planning_and_zoning/document_center.php#revize_document_center_rz1019

TABLE E-3: NATIONAL STORMWATER AND WATER QUALITY PROTECTION WEBSITES

SITE	WEBSITE LINK
Center for Watershed Protection	http://www.cwp.org/
EPA Office of Water	http://www.epa.gov/water
EPA Region 4 (Southeast United States)	http://www.epa.gov/region4
Clean Water Act History	http://www.epa.gov/lawsregs/laws/cwahistory.html
USGS: Florida Waters	http://sofia.usgs.gov/publications/reports/floridawaters/#options