PART 8

SPARES

UNITS 1 AND 2.

8.1 BOTTOM RING

8.1.1 SEAL RING

Reference drawing no.	224F34709
Piece no.	18
Quantity	20
Cross section	0.210"
Inside diameter	4.475"
Model	2-349"
Material	Buna-N
Make	Parker

8.2 INNER OIL SUMP

8.2.1 SEAL RING

Reference drawing no.	224D34723
Piece no.	05
Quantity	01
Inside diameter	16 3/4"
Cross section	3/16"
Mean developed length	53 7/32"
Material	Neoprene

8.3 PACKING BOX

8.3.1 PACKING

Reference drawing no.	224F34720
Piece no.	20
Quantity	One set
Set consist of	4 rings
Model no.	4025
Cross section	5/8" square
Material	Teflon impregnated braided asbestos
Make	Anchor Packing
Supplier	Robco Inc.

PART 8

SPARES

8.3.2 PACKING SPACER

Reference drawing no.	224F34720
Piece no.	21
Quantity	06
Outside diameter	26 5/8"
Inside diameter	25 3/8"
Thickness	1/16"
Material	Klingerite
Supplier	Robco Inc.

8.4 GUIDE BEARING ASSEMBLY

8.4.1 GUIDE BEARING

Reference drawing o.	224F34721
Piece no.	01
Quantity	01
Sections	02
Height	15.250"
Outside diameter	36.308"
Inside diameter	17.000"-17.002"
Material	Welded steel
Babbitt Type	ASTM B-23 Alloy #7
Weight	720 lbs.

8.4.2. INSPECTION COVER

Reference drawing no.	224F34721
Piece no.	23
Quantity	02
Length	4.250"
Width	3.500"
Thickness	0.500"
Material	Clear transparent acrylic plastic
Supplier	

PART 8

SPARES

8.4.3 GASKET

Reference drawing no.	224F34721
Piece no.	24
Quantity	02
Outside dimen[redacted]	

PART 8

SPARES

8.5 COVER PLATE

8.5.1 PACKING RING

PART 8

SPARES

8.7.2 PACKING

Reference drawing no.	224F34726
Piece no.	21
Quantity	20 sets
One set consist of	4 split rings
Model no.	4025
Outside diameter	6 1/8"
Cross section	5/8" square
Material	Teflon impregnated braided asbestos
Make	Anchor Packing Co.
Supplier	Robco Inc.

Dominion Engineering Works

PART 8A

SPARES

U-3, KAPLAN

8A.1 BOTTOM R[illegible]

PART 8A

SPARES

8A.4 RUNNER HUB

8A.4.1 SEAL RING

Reference drawing no.	226F34614
Piece no.	11
Quantity	01
Model	2-324
Type	O'ring
Inside diameter	1.350"
Cross section	3/16" dia.
Material	Buna-N
Make	Parker
Supplier	

PART 8A

SPARES

8A.5 RUNNER BLADE, LEVER ASSEMBLY

8A.5.1 PACKING

Reference drawing no.	226F34686
Piece no.	27
Quantity	10
Type	Block Vee
Outside diameter	15.000"
Inside diameter	14.000"
Height	0.500"
Seal expander diameter	0.375"
Material	Buna-N
Supplier	E.G.&G Sealol Canada

8A.5.2 SEAL RING

Reference drawing no.	226F34689
Piece no.	30
Quantity	05
Type	O'ring
Inside diameter	15.463"
Cross section	3/16" dia.
Mean developed length	49.187"
Material	Neoprene

8A.6 CROSS HEAD SUB-ASSEMBLY

8A.6.1 SEAL RING

Reference drawing no.	226F34623
Piece no.	13
Quantity	01
Model	2-448
Type	O'ring
Inside diameter	9.475"
Cross section	0.250"
Material	Buna-N
Make	Parker
Supplier	Le Roulement National Ltée.

PART 8A

SPARES

8A.6.2 SEAL RING

Reference drawing no.	226F34623
Piece no.	14
Quantity	01
Model	7-446
Type	QUAD-X
Inside diameter	8.475"
Cross section	0.250" dia.
Material	Buna-N
Make	Parker
Supplier	Le Roulement National Ltée.

8A.6.3 SEAL RING

Reference drawing no.	226F34622
Piece no.	15
Quantity	01
Type	O'ring
Inside diameter	2.100"
Cross section	0.210"
Material	Buna-N

8A.7 UPPER RUNNER CONE

8A.7.1 SEAL RING

Reference drawing no.	226F34616
Piece no.	05
Quantity	01
Inside diameter	34.000"
Cross section	0.250"
Mean developed length	107.625"
Material	Neoprene

8A.8 LOWER RUNNER CONE

8A.8.1 SEAL RING

Reference drawing no.	226F34616
Piece no.	11
Quantity	01
Inside diameter	22.500"
Cross section	0.250"
Mean developed length	71.500"
Material	Neoprene

8A.8 LOWER RUNNER CONE

PART 8A

SPARES

8A.9 INNER OIL SUMP

8A.9.1 SEAL RING

Reference drawing no.	226D34693
Piece no.	05
Quantity required	

PART 8A

PART 8A

SPARES

8A.11.4 VALVE

Reference drawing no.	226F34621
Piece no.	28
Quantity	01
Model	#7
Type	Globe
Size	1/2" NPT
Material	Bronze
Rated	150 lbs.
Make	Crane
Supplier	Crane Supply Co.

8A.11.5 SEAL

Reference drawing no.	226F34621
Piece no.	32
Quantity	02
Cross section	3/16" dia.
Length	15"
Material	Neoprene.

8A.12 COVER PLATE

8A.12.1 PACKING RING

Reference drawing no.	226F34624
Piece no.	06
Quantity	01
Sections	02
Cut on inside radius of	5.625"
Width	1.000"
Thickness	0.375"
Material	White felt SA F5

PART 8A

SPARES

8A.13 OIL LEVEL INDICATOR

8A.13.1 GASKET

Reference drawing no.	226F34642
Piece no.	15
Quantity	01
Outside diameter	6.000"
Inside diameter	4.250"
Thickness	0.062"
Material	Hydroil

8A.14 LINKS AND LEVERS

8A.14.1 BREAKE LINKS

Reference drawing no.	224F34727
Piece no.	12
Quantity	09
Thickness	1.469"
Length - between holes center	6.500"
Material	Bronze
Weight	6 lbs.

8A.15 GOVERNOR PIPING

8A.15.1 GASKET

Reference drawing no.	226C34641
Piece no.	03
Quantity	04
Outside diameter	2.500"
Inside diameter	1.875"
Thickness	0.125"
Material	Micarta Grade "C"
Supplier	Daly's Engineered Plastics

PART 8A

SPARES

8A.16 OIL HEAD

8A.16.1 WASHER

Reference drawing no.	226C34641
Piece no.	04
Quantity	12
Outside diameter	1.375"
Inside diameter	0.656"
Thickness	0.125"
Material	Polyvinylchloride (PVC)

8A.16.2 PACKING

Reference drawing no.	226F34644
Piece no.	35
Quantity	2 sets
Set consist of	Top & bottom adapter and 2 rings
Type	Endless V-ring
Stack height	17/32" with 2 rings
Outside diameter	1.500"
Inside diameter	1.00"
Packing size	0.250" Cross section
Material	Neoprene-Duck
Make	Anchor
Supplier	Robco Inc.

8A.16.3 SHIM

Reference drawing no.	226F34644
Piece no.	36 & 37
Quantity	02
Outside diameter	1.500"
Inside diameter	1.000"
Thickness	one 1/32" and one 1/64"
Supplier	Robco Inc.

PART 8A

SPARES

8A.16.4 SEAL - GE SPEED SWITCH

Reference drawing no.	226F34644
Piece no.	40
Quantity	01
Inside diameter	4.975"
Cross section	0.250" dia.
Type	O'ring
Material	Buna-N.

8A.16.5 SEAL - WINDOWS

Reference drawing no.	226F34644
Piece no.	41
Quantity	04
Length	21"
Cross section	3/16" dia.
Material	Neoprene

8A.16.6 SEAL - TOP OF OIL HEAD MIDDLE PART

Reference drawing no.	226F34644
Piece no.	42
Quantity	01
Model	2-446
Type	O'ring
Inside diameter	8.475"
Cross section	0.250" dia.
Material	Buna-N
Make	Parker
Supplier	Le Roulement National Ltée.

8A.16.7 SEAL - OIL PIPE EXTENSION

Reference drawing no.	226F34644
Piece no.	43
Quantity	01
Model	2-344
Type	O'ring
Inside diameter	3.850"
Cross section	3/16"
Material	Buna-N
Make	Parker
Supplier	Le Roulement National Ltée.

PART 8A

SPARES

8A.17 OIL HEAD PIPING

8A.17.1 SEAL - SMALL PIPE & PISTON CONNECTION

Reference drawing no.	226F34643
Piece no.	11
Quantity	06
Model	2-216
Type	O'ring
Inside diameter	1.109"
Cross section	0.139" dia.
Material	Buna-N
Make	Parker

8A.17.2 SEAL - LARGE PIPE, SHAFT & PIPE EXTENSION CONNECTION

Reference drawing no.	226F34643
Piece no.	12
Quantity	02
Model	2-344
Type	O'ring
Inside diameter	3.850"
Cross section	0.210"
Material	Buna-N
Make	Parker

8A.17.3 SEAL - LARGE PIPE & GENERATOR CONNECTION

Reference drawing no.	226F34643
Piece no.	13
Quantity	01
Model	2-356
Type	O'ring
Inside diameter	5.350"
Cross section	0.210"
Material	Buna-N
Make	Parker

PART 8A

SPARES

8A.17.4 SEAL - INTERMEDIATE TO LARGE PIPE CONNECTION

Reference drawing no.	226F34643
Piece no.	14
Quantity	01
Model	2-139
Type	O'ring
Inside diameter	2.175"
Cross section	0.103"
Material	Buna-N
Make	Parker

8A.17.5 SEAL - LARGE PIPE TO SHAFT CONNECTION

Reference drawing no.	226F34643
Piece no.	18
Quantity	01
Model	2-337
Type	O'ring
Inside connection	2.975"
Cross section	0.210"
Material	Buna-N
Make	Parker.

PART 9


TOOLS


9.1 SHAFT AND RUNNER SUPPORT FIXTURE

Reference drawing no. 224F34758

9.2 LIFTING DEVICE


Reference drawing no. 224C34751

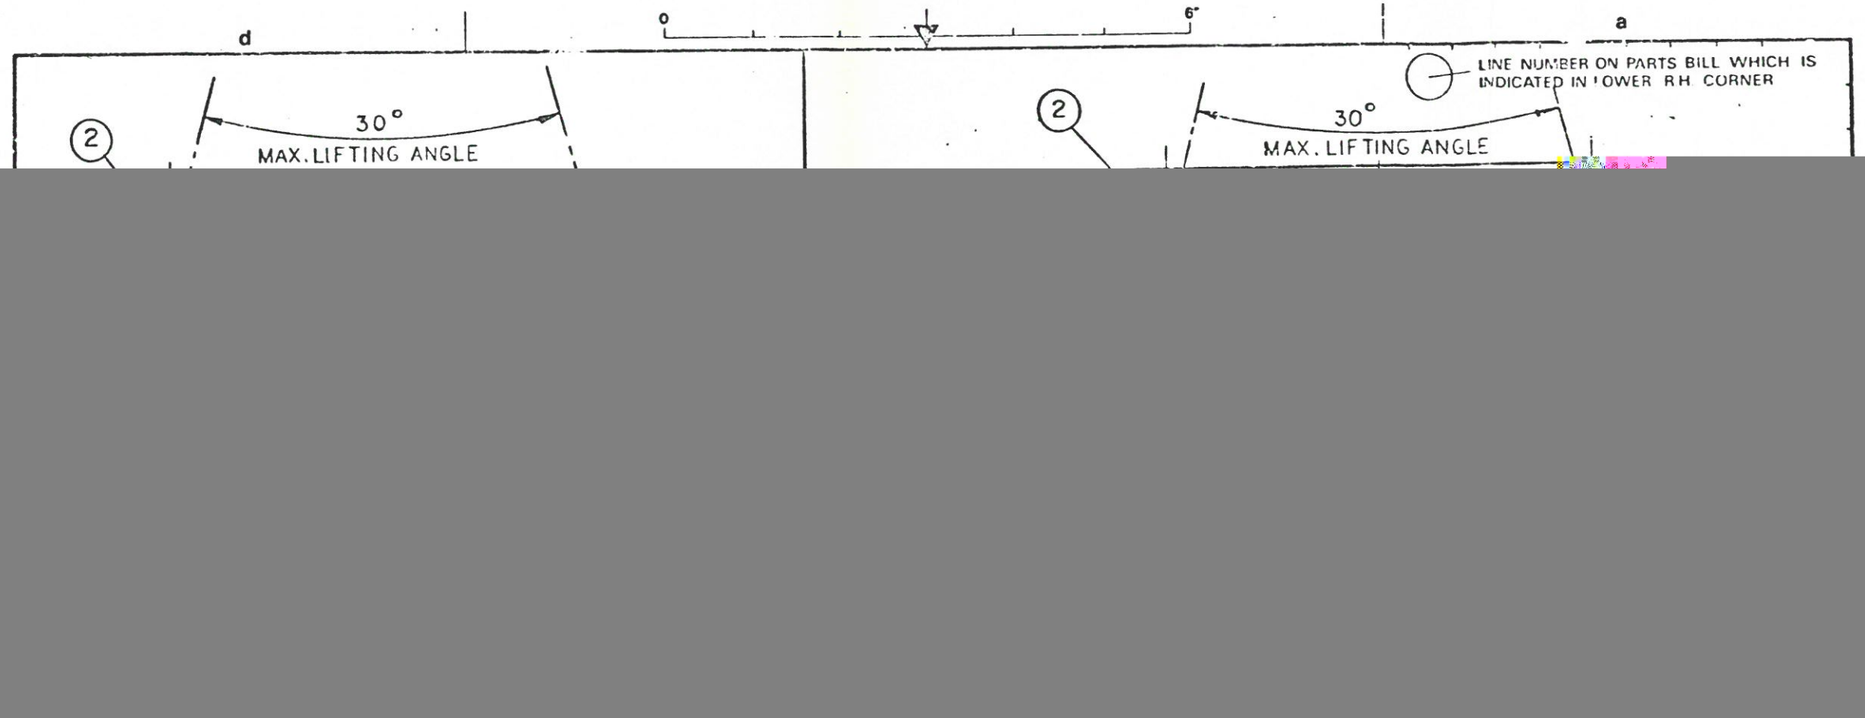
d
0
6"
a
LINE NUMBER ON PARTS BILL WHICH IS INDICATED IN LOWER RH CORNER
2
30°
MAX. LIFTING ANGLE
2
30°
MAX. LIFTING ANGLE

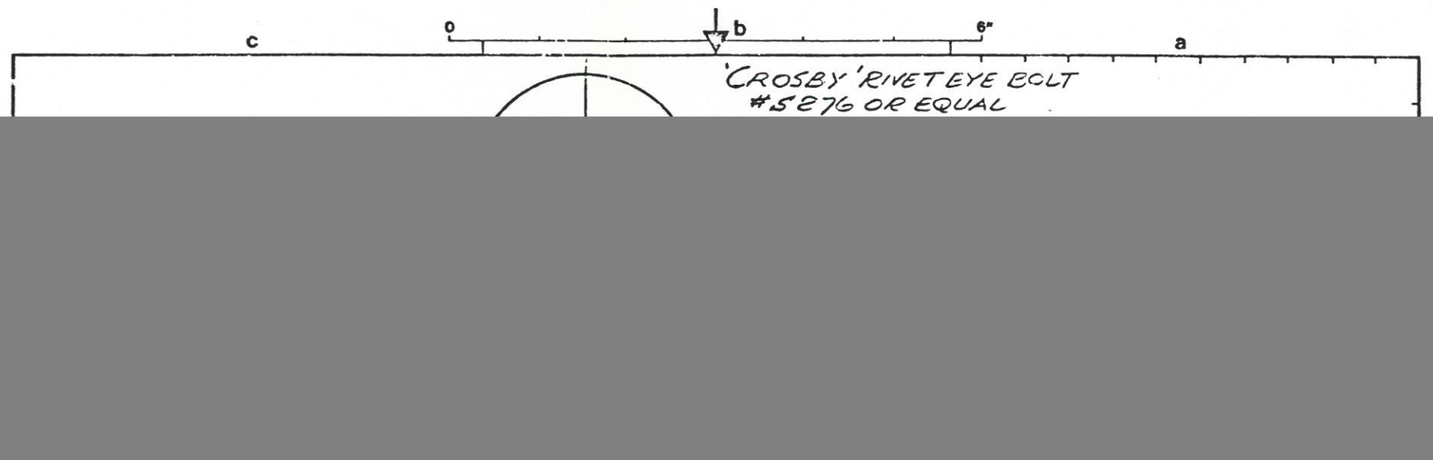
c
0
b
6"
a
'CROSBY' RIVET EYE BOLT
#5276 OR EQUAL




(-) LINE NUMBER ON PARTS BILL WHICH IS INDICATED IN LOWER RH CORNER

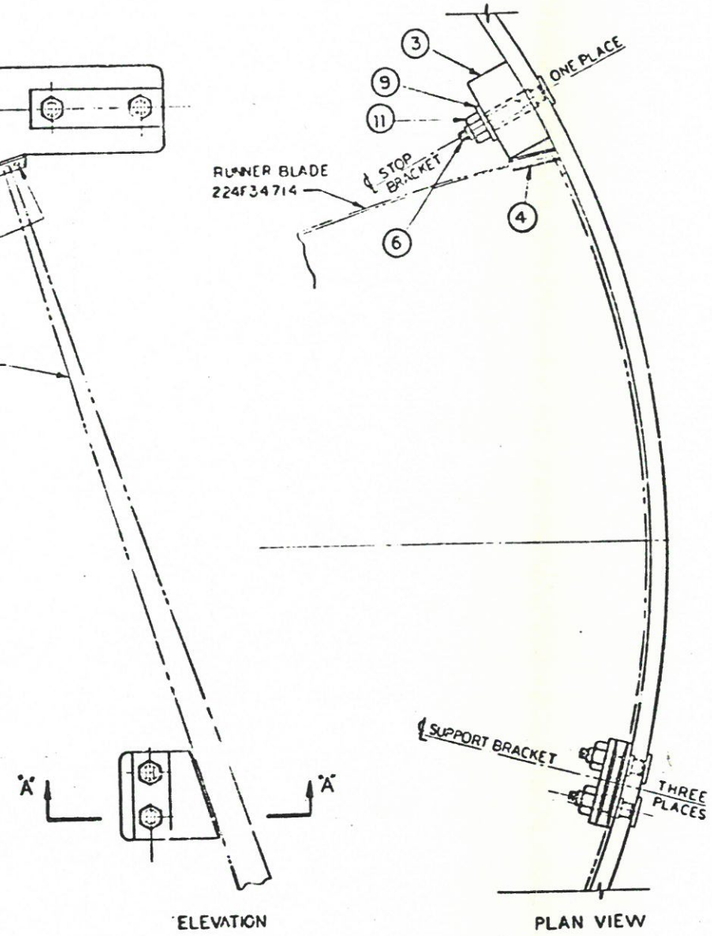

ELEVATION

PLAN VIEW

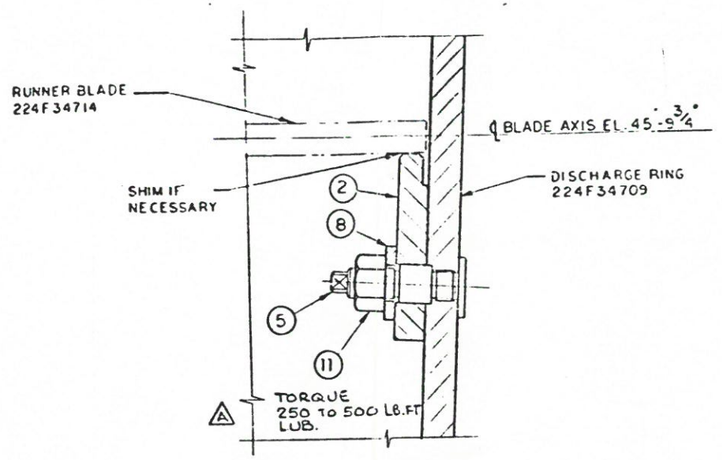

SECTION "A-A"

(1) G001-ASSEMBLY

NOTES:

AT FINAL FIELD ASSEMBLY REMOVE STUDS (5) & (6) AND PLUG HOLES WITH (7) 224D34757P007, TIGHTEN PLUG TO SHEAR, TACK WELD TO LOCK AND DRESS TO CONTOUR OF DISCHARGE RING.

IF REMOVAL OF PLUGS (7) IS REQUIRED, PREPARE A SCREWDRIVER SLOT BY CHIPPING AND UPON REPLACEMENT FILL SLOT BY DEPOSITING STAINLESS STEEL WELDING MATERIAL AND DRESSING FLUSH.

LIBERALLY COAT THREADS IN DISCHARGE RING WITH RUST PREVENTATIVE COMPOUND BEFORE INSTALLING STUDS (5) & (6) AT SITE.

244-900420	492	UNIT #1		CITY OF TALLAHASSEE JACKSON BLUFF HYDROELECTRIC PROJECT PROPELLER TURBINE
244-900410		UNIT #2		

CONTRAT CONTRACT	NOMEN P BILL	P. G.	ENS SUP N = ASM	PROJET PROJECT	DATE

REFERENCE POUR INGÉNIERIE SEULEMENT / ENGINEERING REF ONLY

REVISIONS			
A	85/12/01	CE	TORQUE ADDED

TOLÉRANCES D'USINAGE POUR DIMENSIONS & CARACTÉRISTIQUES NON LIMITÉES
TOLERANCES FOR NON-LIMITED DIMENSIONS & FEATURES FOR MACHINING

DIM. PLUS DE / DIM OVER	0	2	6	20	40	160	320	470	630
DIM. JUSQU'À / DIM UP TO	2	6	20	80	160	320	470	630	790
LINÉAIRE / LINEAR	±0.01	±0.015	±0.03	±0.05	±0.08	±0.13	±0.15	±0.20	±0.25
CONCENTR. ◎	0.003	0.005	0.008	0.012	0.018	0.025	0.035	0.050	0.080
GÉOMÉTR. ⏥ ⊥	0.01	0.02	0.03	0.04	0.05	0.06	0.09	0.12	0.13

TOLÉRANCES NON LIMITÉES POUR POSITION ⌖ DES CENTRES DE TROUS
TOLERANCES FOR NON LIMITED POSITION ⌖ OF HOLE CENTERS

Ø PLUS DE / OVER	0	0.75	1.25	2.0	5.0	8.0
Ø / TO	0.75	1.25	2.0	5.0	8.0	–
TOLERANCE	0.04	0.08	0.12	0.18	0.25	0.40

DIM EN POUCES / DIM IN INCHES

ÉCHELLE/SCALE 3/8

DES DR M.S. VERIFIÉ/CHK RE

PROJ PASS

APPR PROJECTION

DATE 21/04/24

RUNNER SUPPORT & STOP BRACKET ASSEMBLY


RÉF. 224D33157


ATELIERS D'INGÉNIERIE DOMINION
MONTRÉAL CANADA
DOMINION ENGINEERING WORKS
MONTREAL CANADA


HYDRAULIC TURBINE SECTION


224D34757 | FEUILLE/SHEET 1 | DE/OF 2 | REV A


CE DESSIN EST LA PROPRIÉTÉ DES ATELIERS D'INGÉNIERIE DOMINION. IL NE PEUT ÊTRE REPRODUIT NI COMMUNIQUÉ À DES TIERS SANS AUTORISATION ET DOIT ÊTRE RETOURNÉ APRÈS USAGE
THIS DRAWING IS THE PROPERTY OF DOMINION ENGINEERING WORKS. IT MAY NOT BE USED OR COPIED EXCEPT AS EXPRESSLY AUTHORIZED BY IT AND MUST BE RETURNED AFTER SUCH USE

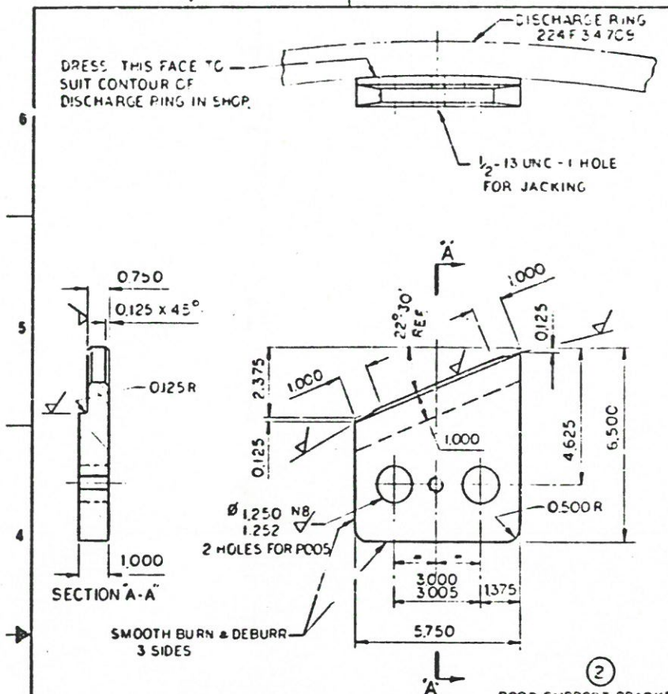


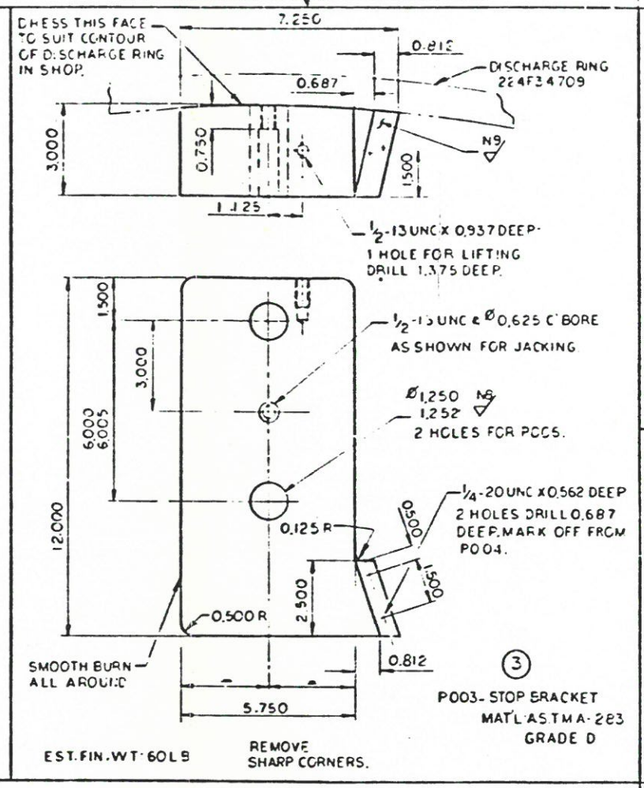

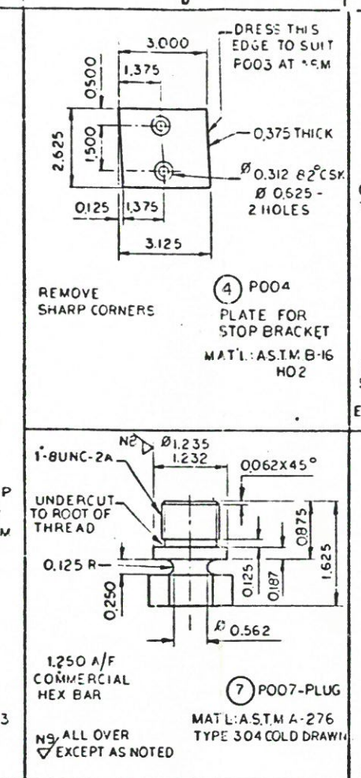

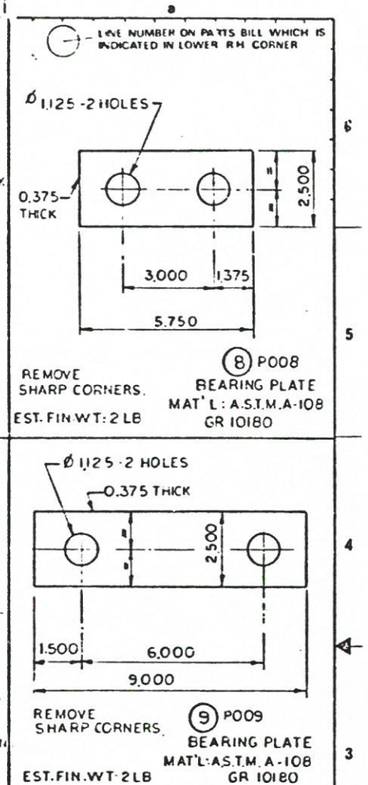

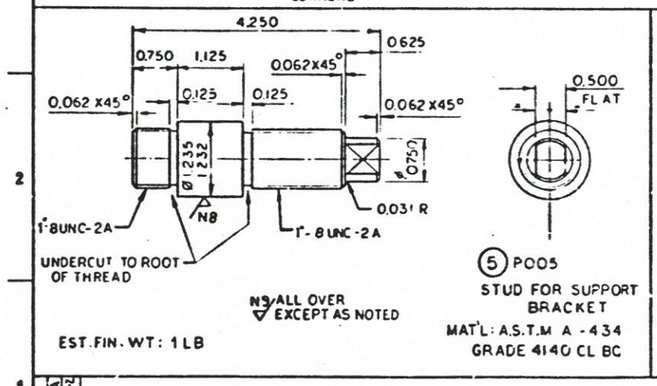

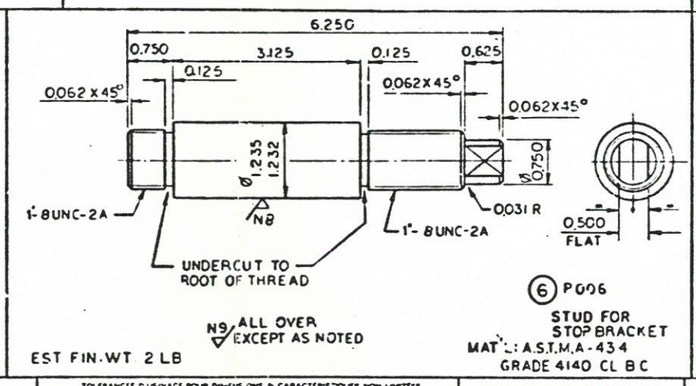

246-900210	492	P005 To P008 ONLY		CITY OF TALLAHASSEE JACKSON BLUFF HYDROELECTRIC PROJECT KAPLAN TURBINE U-3
244-900420	492	UNIT #1		CITY OF TALLAHASSEE JACKSON BLUFF HYDROELECTRIC PROJECT PROPELLER TURBINE
244-900410		UNIT #2		

CONTRAT CONTRACT	NOMBRE PIÈCE	ENS SUP N.H. ASM	PROJET PROJECT	DATE

RÉFÉRENCE POUR INGÉNIERIE SEULEMENT - ENGINEERING REF ONLY

REVISIONS: A 81 01 01 PART ADDED

TOLÉRANCES D'USINAGE POUR DIMENSIONS & CARACTÉRISTIQUES NON LIMITÉES
TOLERANCES FOR NON - LIMITED DIMENSIONS & FEATURES FOR MACHINING

DIM PLUS DE / DIM OVER	0	2	6	30	80	120	315	470	630
A / TO	2	6	30	80	120	315	470	630	790
LINÉAIRE / LINEAR	±0.015	±0.015	±0.03	±0.05	±0.08	±0.10	±0.15	±0.20	±0.25
CONCENTR. ◎	0.10	0.05	0.08	0.12	0.20	0.30	0.45	0.70	1.00
GÉOMÉTR. ⏥ ⏤ // ⊥	0.01	0.02	0.03	0.04	0.05	0.06	0.08	0.12	0.18

TOLÉRANCES NON LIM. POUR POSITION ⌖ DES CENTRES DE TROUS
TOLERANCES FOR NON LIMITED POSITION ⌖ OF HOLE CENTERS

DIM PLUS DE / DIM OVER	0	0.75	1.25	2.0	5.0	8.0	–
A / TO	0.75	1.25	2.0	5.0	8.0	–	–
TOLERANCE	0.08	0.09	0.10	0.15	0.20	0.25	0.40


DIM EN POUCES / DIM IN INCHES
ÉCHELLE/SCALE 6, 12 : 12
DES/DR M. S. VÉR/CHK RE
PROJ/PAR
APPR
DATE 02/04/24
PROJECTION

RUNNER SUPPORT & STOP BRACKET ASSEMBLY
REF 224D33257


ATELIERS D'INGÉNIERIE DOMINION MONTRÉAL, CANADA
DOMINION ENGINEERING WORKS MONTREAL CANADA
HYDRAULIC TURBINE SECTION

224D34757 | UNIT 2 | SH 2 | REV A


CE DESSIN EST LA PROPRIÉTÉ DES ATELIERS D'INGÉNIERIE DOMINION IL NE PEUT ÊTRE REPRODUIT EN COMMUNIQUÉ À DES TIERS SANS AUTORISATION ET DOIT ÊTRE RETOURNÉ APRÈS USAGE
THIS DRAWING IS THE PROPERTY OF DOMINION ENGINEERING WORKS IT MAY NOT BE USED OR COPIED EXCEPT AS EXPRESSLY AUTHORIZED BY IT AND MUST BE RETURNED AFTER SUCH USE

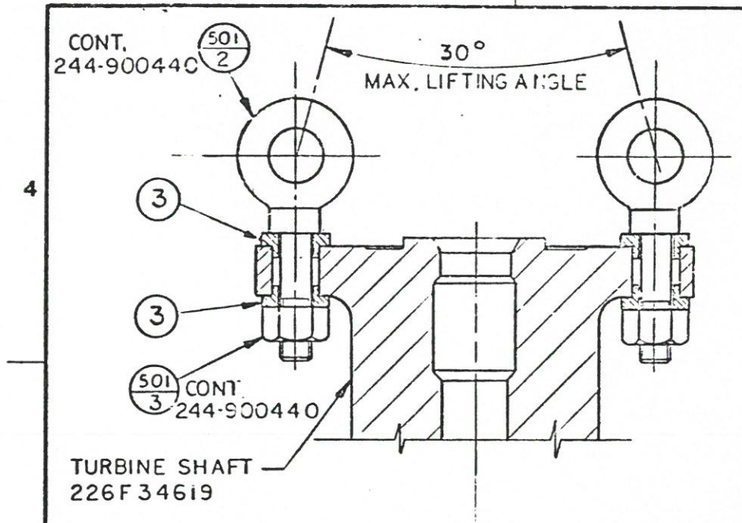

LIFTING DEVICE - SHAFT
(4500 LB)

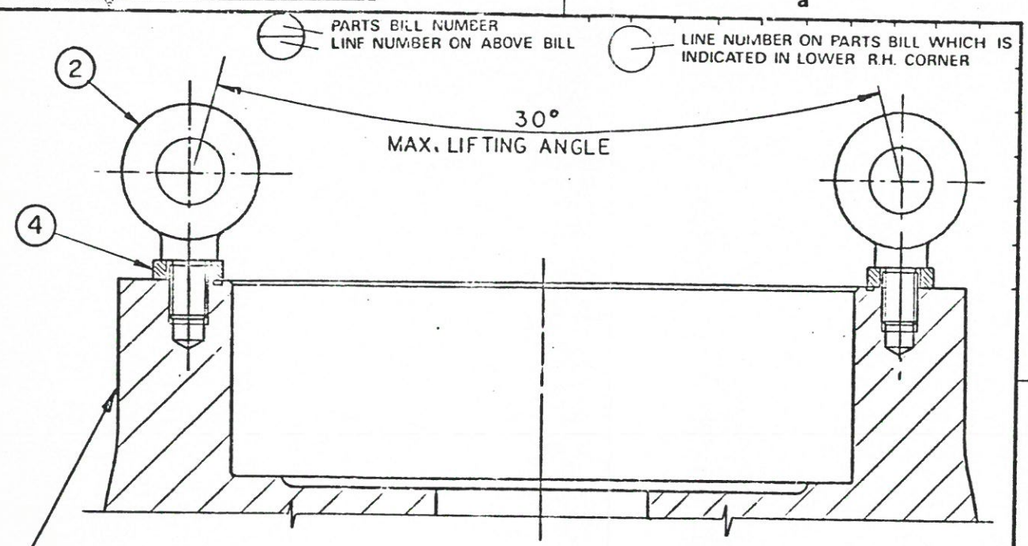


LIFTING DEVICE - RUNNER
(15500 LB)

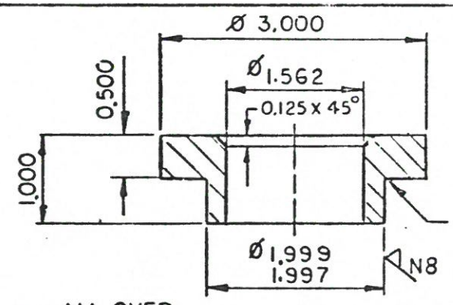

BREAK SHARP CORNERS

N9 ALL OVER
EXCEPT AS NOTED

BUSHING
(3) P003
MAT'L: A.S.T.M.A-108
G 10180

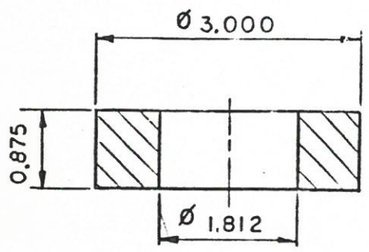

BREAK SHARP CORNERS

N9 ALL OVER

SPACER
(4) P004
MAT'L: A.S.T.M.A-108
G 10180

TOLÉRANCES D'USINAGE POUR DIMENSIONS & CARACTÉRISTIQUES NON LIMITÉES
TOLERANCES FOR NON-LIMITED DIMENSIONS & FEATURES FOR MACHINING

DIM. PLUS DE / DIM. OVER À / TO	0 2	2 6	6 20	20 80	80 160	160 320	320 470	470 630	630 790
LINÉAIRE / LINEAR	±0.015	±0.015	±0.03	±0.05	±0.08	±0.10	±0.15	±0.20	±0.25
CONCENTR. ◎	0.003	0.005	0.008	0.012	0.026	0.040	0.055	0.070	0.090
GÉOMÉTR. ⏥, ⏤, ⫽, ⊥	0.01	0.02	0.03	0.04	0.05	0.06	0.09	0.12	0.12

TOLÉRANCES NON LIMITÉES POUR POSITION ⌖ DES CENTRES DES TROUS.
TOLERANCES FOR NON LIMITED POSITION ⌖ OF HOLE CENTERS.

Ø PLUS DE/OVER	0	0.75	1.25	2.0	3.0	8.0
À / TO	0.75	1.25	2.0	3.0	8.0	—
TOLERANCE	0.06	0.08	0.12	0.18	0.25	0.40

CONTRAT CONTRACT	NOMEN P BILL	DW P OR G	ENS SUP N H ASM	PROJET PROJECT	DATE
246-900210	501			CITY OF TALLAHASSEE JACKSON BLUFF HYDROELECTRIC PROJECT KAPLAN TURBINE	

RÉFÉRENCE POUR INGÉNIERIE SEULEMENT / ENGINEERING REF. ONLY

REVISIONS: A


DIM. EN POUCES / DIM IN INCHES
ÉCHELLE/SCALE 3, 12 =12
DES/DR. M.S. VÉR/CHK
PROJ./PROJ.
APPR.
DATE 85 02 01
PROJECTION

LIFTING DEVICE
FOR
RUNNER & SHAFT

REF

ATELIERS D'INGÉNIERIE DOMINION
DOMINION ENGINEERING WORKS
MONTRÉAL, CANADA

HYDRAULIC TURBINE SECTION

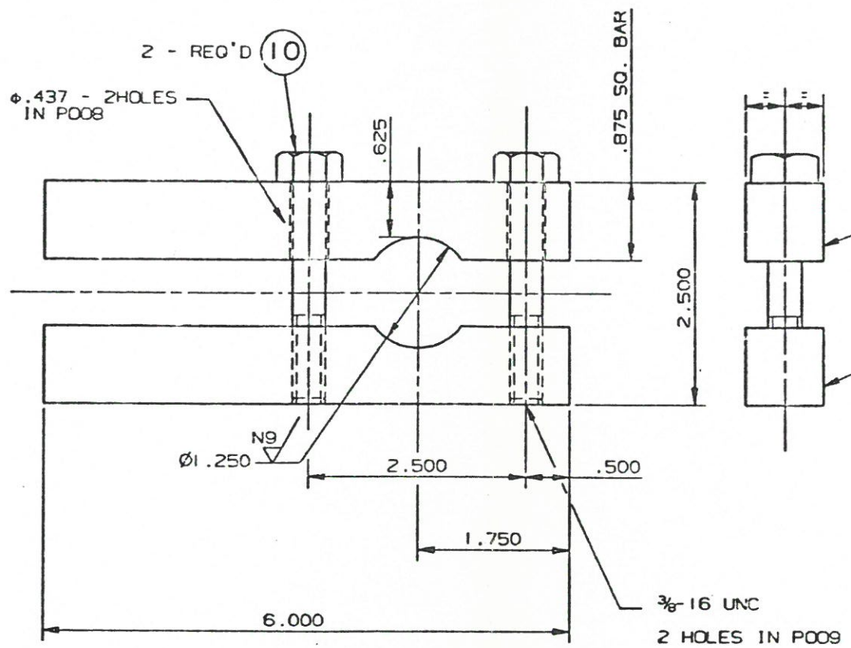

LINE NUMBER ON PARTS BILL WHICH IS INDICATED IN LOWER R.H. CORNER

(8) P008 - 1 REQ'D
MATERIAL: ASTM A-108
GRADE 1018

(9) P009 - 1 REQ'D
MATERIAL: ASTM A-108
GRADE 1018


(7) G001 - ASSEMBLY


EST.FIN.WT: 3 LB

TOLERANCES D'USINAGE POUR DIMENSIONS & CARACTERISTIQUES NON LIMITEES TOLERANCES FOR NON - LIMITED DIMENSIONS & FEATURES FOR MACHINING									
DIM. PLUS DE / OVER	0	2	6	20	80	160	320	470	630
A / TO	2	6	20	80	160	320	470	630	790
LINEAIRE / LINEAR	±0.015	±0.015	±0.03	±0.05	±0.08	±0.10	±0.15	±0.20	±0.25
CONCENTR. ◎	0.003	0.005	0.008	0.012	0.026	0.040	0.055	0.070	0.080
GEOMETR. ▱ ⏥ ⌭	0.01	0.02	0.03	0.04	0.05	0.08	0.10	0.12	0.15

TOLERANCES NON LIMITEES POUR POSITION Φ DES CENTRES DE TROUS. TOLERANCES FOR NON LIMITED POSITION Φ OF HOLE CENTERS.						
Φ PLUS DE/OVER	0	0.75	1.25	2.0	5.0	8.0
A/ TO	0.75	1.25	2.0	5.0	8.0	-


246 90020	450		226F 34643	CITY OF TALLAHASSEE JACKSON BLUFF HYDROELECTRIC PROJECT KAPLAN TURBINE U-3	
CONTRAT CONTRACT	NOMEN P. BILL	F. ou / or G.	ENS. SUP N. H. ASM	PROJET PROJECT	DATE

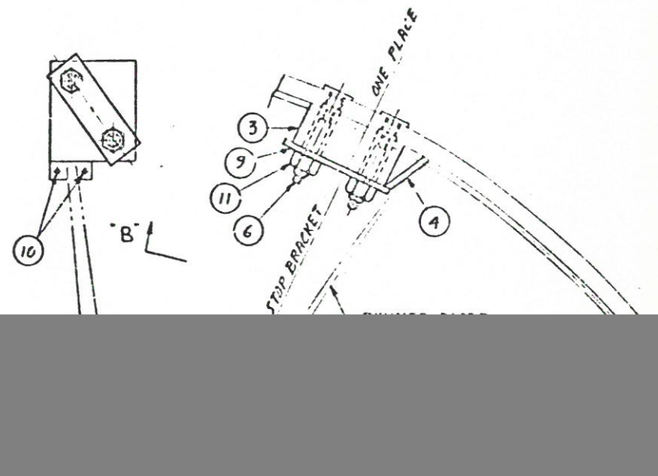


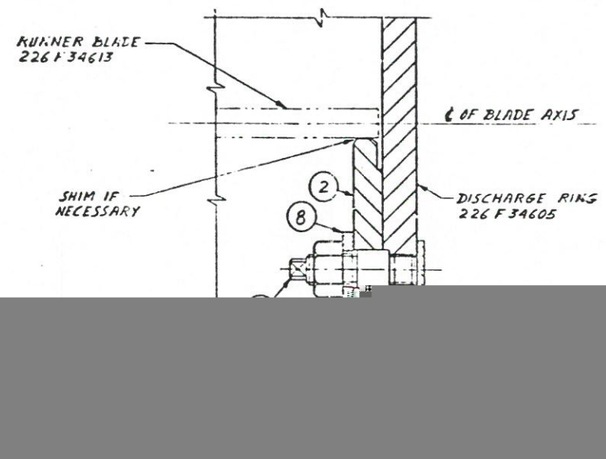


LINE NUMBER ON PARTS BILL WHICH IS INDICATED IN LOWER RH CORNER

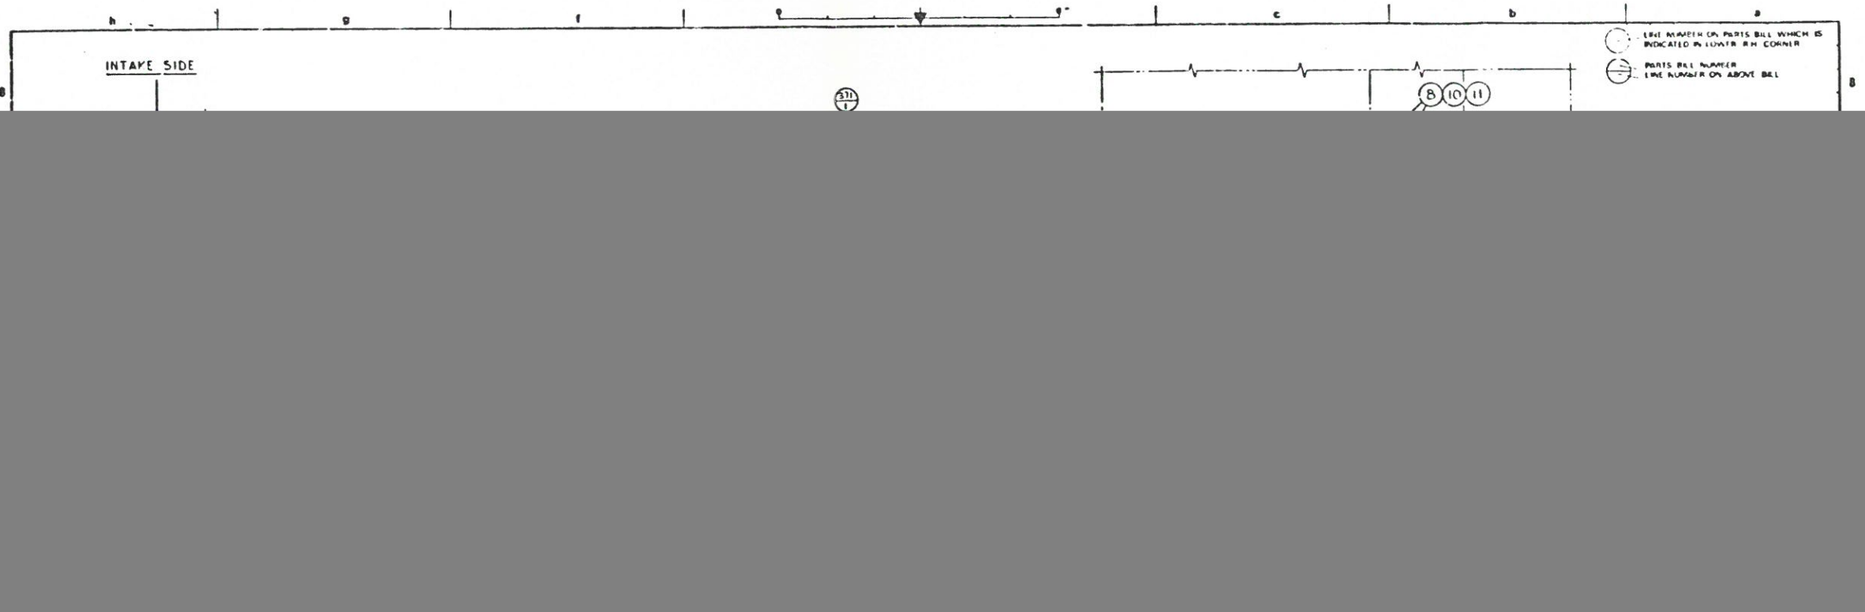



INTAKE SIDE
LINE NUMBER ON PARTS BILL WHICH IS INDICATED IN LOWER R.H. CORNER
PARTS BILL NUMBER
LINE NUMBER ON ABOVE BILL

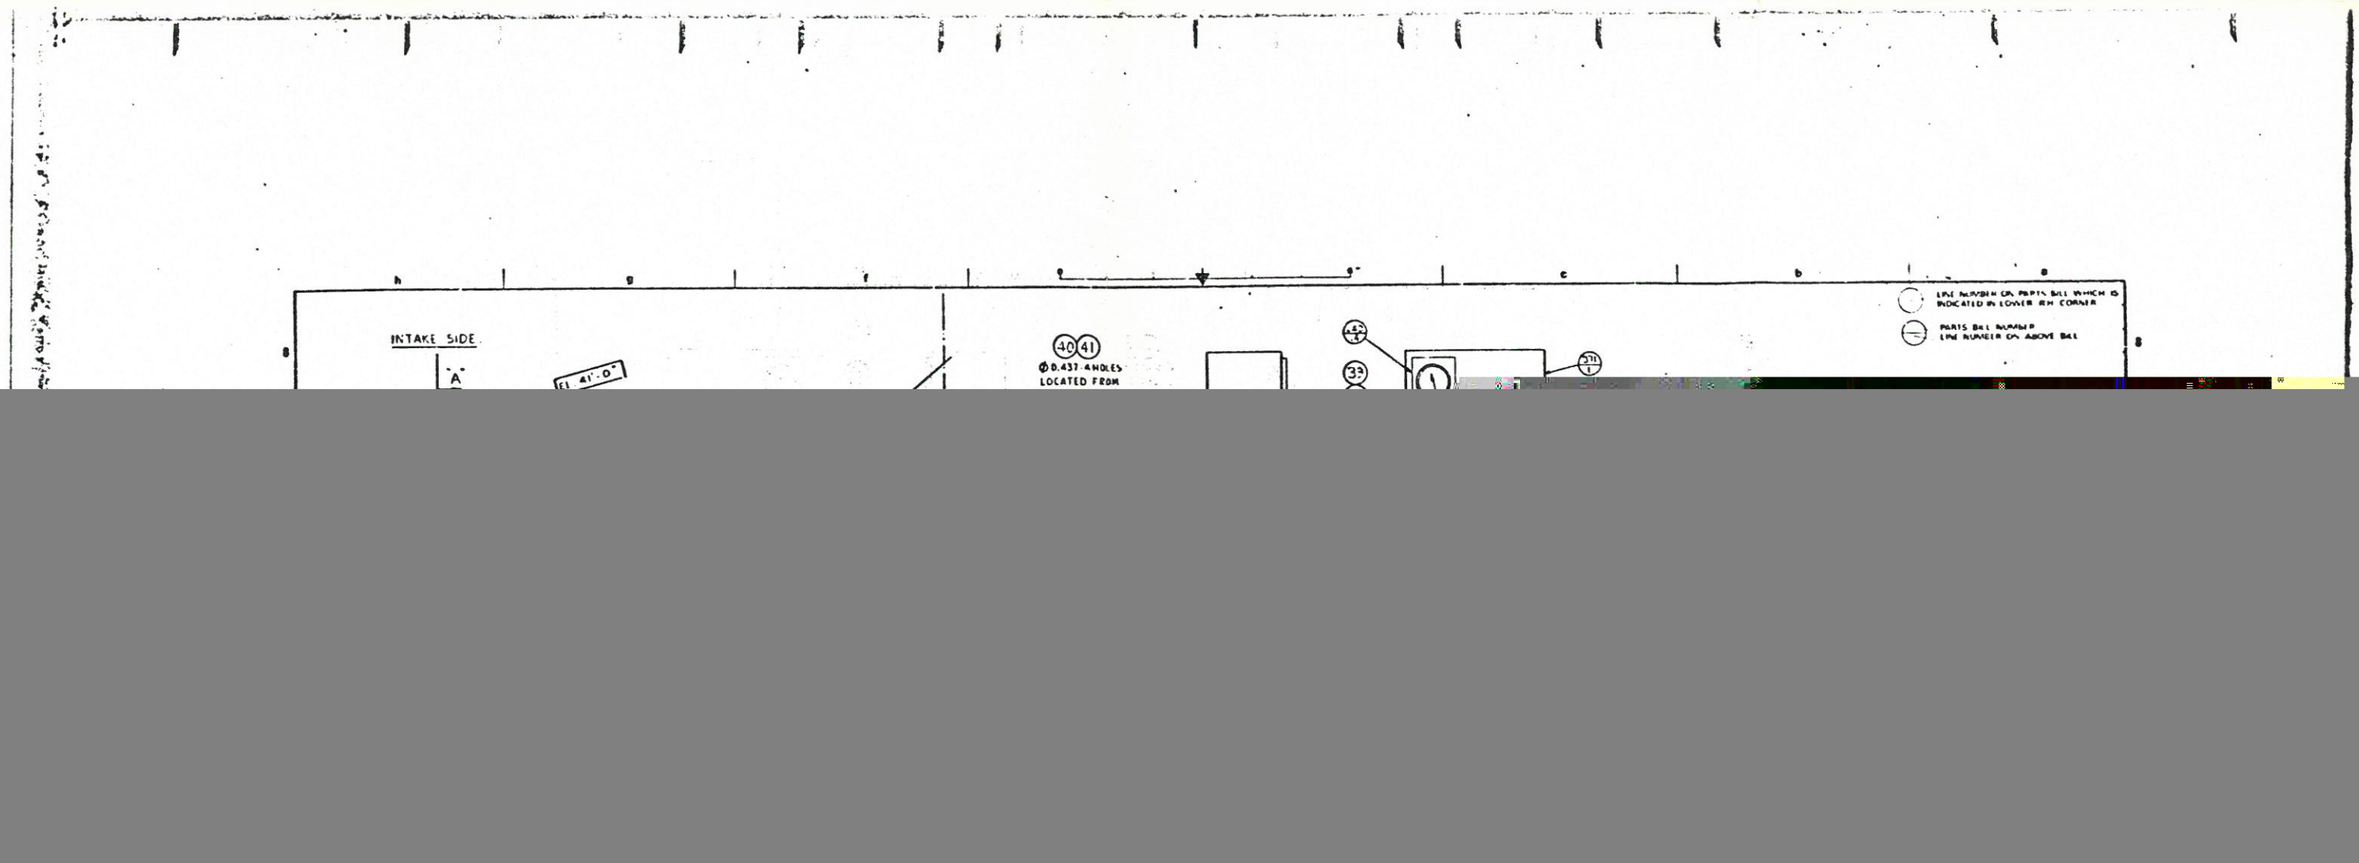
INTAKE SIDE
EL 41'-0"
(40)(41)
Ø0.437 4HOLES
LOCATED FROM
(42)
(33)
(37)
LINE NUMBER ON PARTS BILL WHICH IS
INDICATED IN LOWER RH CORNER
PARTS BILL NUMBER
LINE NUMBER ON ABOVE BILL

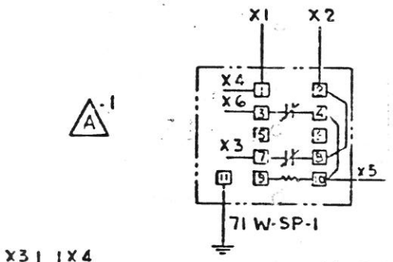


A-1

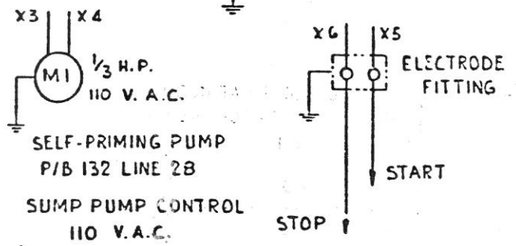


SELF-PRIMING PUMP
P/B 132 LINE 28

SUMP PUMP CONTROL
110 V.A.C.
P/B 132 LINE 26

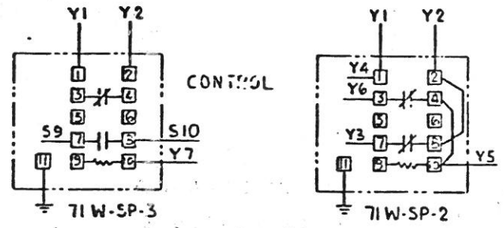

A-2

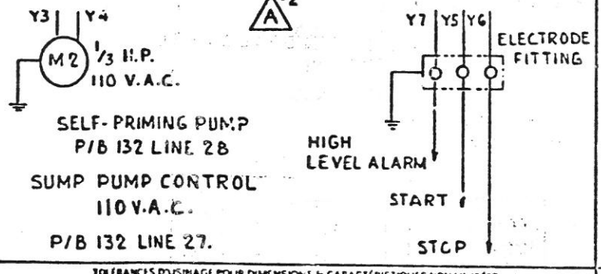


SELF-PRIMING PUMP
P/B 132 LINE 28

SUMP PUMP CONTROL
110 V.A.C.

P/B 132 LINE 27.

38TD B




GUIDE BEARING TEMPERATURE DETECTORS.

P/B 240 LINE 11.

COPPER RESISTANCE TEMPERATURE DETECTORS
3 WIRE SINGLE ELEMENTS 10 OHM AT 25° C.


71QB



GUIDE BEARING LOW - HIGH OIL LEVEL ALARMS 120 V.D.C.

P/B 242 LINE 2.


80 WFB



PACKING BOX LOW WATER FLOW ALARMS. 120 V.D.C.

P/B 330 LINE 27

38 TB



GUIDE BEARING METAL HIGH TEMPERATURE INDICATOR ALARMS 120 V.D.C.

P/B 240 LINE 14.

REFERENCES DRAWINGS:

DWG 224F34736 - ELECTRICAL CONDUIT FOR TURBINE ACCESSORIES.

DWG. 226D34637 - TURBINE INSTRUMENT PANEL. (MOUNTED OUTSIDE TURBINE PIT.)

TOLERANCES D'USINAGE POUR DIMENSIONS & CARACTÉRISTIQUES NON LIMITÉES
TOLERANCES FOR NON LIMITED DIMENSIONS & FEATURES FOR MACHINING

DIM PLUS DE / DIM OVER À / TO	0 2	2 6	6 20	20 80	80 160	160 320	320 470	470 630	630 790
LINÉAIRE - LINEAR	±0.015	±0.015	±0.03	±0.05	±0.08	±0.10	±0.15	±0.20	±0.25
CONCENTR. ◎	0.003	0.005	0.008	0.012	0.026	0.040	0.055	0.070	0.080
GEOMETR. ▱ ⏥ ⊥	0.01	0.02	0.03	0.04	0.05	0.06	0.09	0.12	0.12

TOLÉRANCES NON LIMITÉES POUR POSITION
⊕ DES CENTRES DES TROUS
TOLERANCES FOR NON LIMITED POSITION
⊕ OF HOLE CENTERS.

Ø PLUS DE/OVER À / TO	0 0.75	0.75 1.25	1.25 2.0	2.0 5.0	5.0 8.0	8.0 —
TOLERANCE	0.06	0.08	0.12	0.18	0.25	0.40

REVISIONS			
A	d-4	WIRING NUMBER RELOCATED.	1
REMARKS		WIRING NUMBER RELOCATED	2

DIM EN POUCES / DIM IN INCHES
ÉCHELLE/SCALE NONE
DES/DR C.D.
VÉR/CHK J.C.P.
PROJ/PASS
APPR
DATE Sept. 11. 26
PROJECTION

TURBINE WIRING DIAGRAM

REF 226C34635

ATELIERS D'INGÉNIERIE DOMINION
DOMINION ENGINEERING WORKS
MONTRÉAL, CANADA

HYDRAULIC TURBINE SECTION.

224C34735 | SHEET 1 | DE/OF 1 | REV A

CONTRAT CONTRACT	NOMEN P.BILL	DU/OF P/G	ENS. SUP H.P. ASM	PROJET PROJECT	DATE
244-900420	360			CITY OF TALLAHASSEE JACKSON BLUFF HYDROELECTRIC PROJECT- PROPELLER TURBINE	
244.300410	371				

RÉFÉRENCE POUR INGÉNIERIE SEULEMENT / ENGINEERING REF. ONLY

CE DESSIN EST LA PROPRIÉTÉ DES ATELIERS D'INGÉNIERIE DOMINION ET NE PEUT ÊTRE REPRODUIT OU COMMUNIQUÉ À DES TIERS SANS AUTORISATION ET DOIT ÊTRE RETOURNÉ APRÈS USAGE
THIS DRAWING IS THE PROPERTY OF DOMINION ENGINEERING WORKS. IT MAY NOT BE USED OR COPIED EXCEPT AS EXPRESSLY AUTHORIZED BY IT AND MUST BE RETURNED AFTER SUCH USE