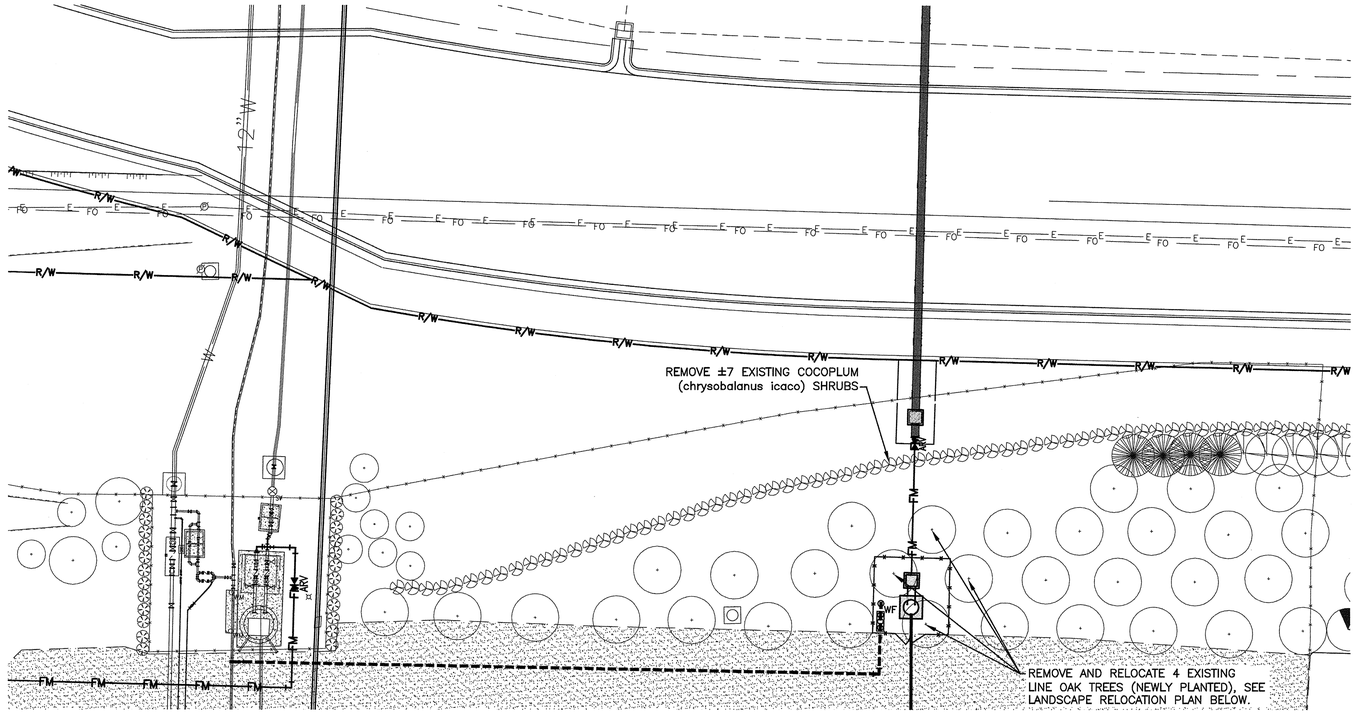

LANDSCAPE REMOVAL PLAN

SCALE: 1"=20.00'

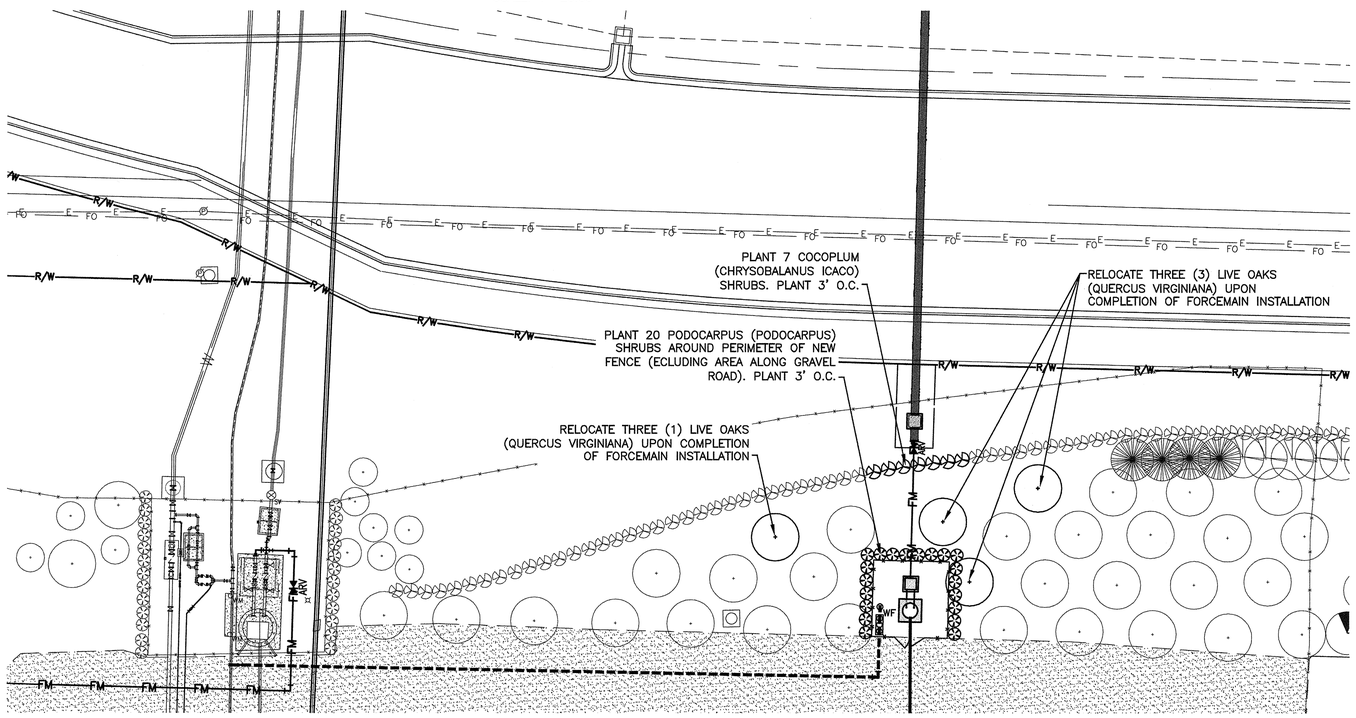

PROPOSED LANDSCAPE RELOCATION PLAN

SCALE: 1"=20.00'

NOTES:
1. CONTRACTOR SHALL USE CAUTION WHEN REMOVING EXISTING SHRUBS AND PALMS AS TO NOT DAMAGE THE EXISTING ROOT BALL. IF THE ROOT BALL OR OVERALL HEALTH OF THE TREE OR SHRUB IS IN POOR CONDITION, EITHER BEFORE OR AFTER RELOCATION, THE CONTRACTOR SHALL REPLACE WITH NEW TREE OR SHRUB OF EQUAL HEIGHT.
2. REPLACE TREES AND SHRUBS, IF NECESSARY, WITH LIKE KIND.
3. CONTRACTOR SHALL RELOCATE ANY EXISTING IRRIGATION THAT EXISTS WITHIN THE PROPOSED FORCEMAIN ROUTE.



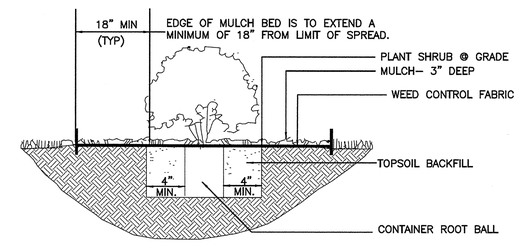

TYPICAL SHRUB PLANTING DETAIL

NOT TO SCALE

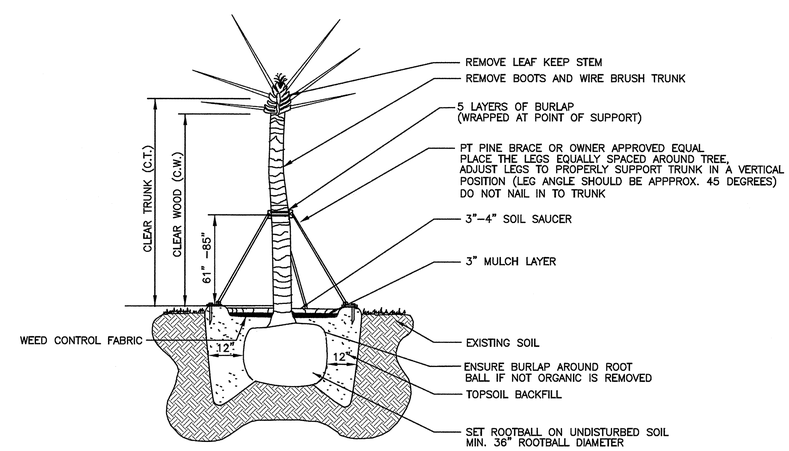

NOTE: ALL PALMS SHALL BE WATERED IN THOROUGHLY WITH A HIGH PRESSURE WATER NOZZEL AND PACKED WITH SOIL TO REMOVE TRAPPED AIR POCKETS.

TYPICAL PALM PLANTING DETAIL

NOT TO SCALE

REV#	DATE	DESCRIPTION	BY

NOT VALID FOR CONSTRUCTION UNLESS SIGNED AND DATED.

WADETRIM
3700 Dixie Highway NE, Suite D
Palm Bay, FL 32905
321.728.3393 FAX: 321.728.3393
Certificate of Authorization No.: 3562
www.wadetrim.com

Building relationships on a foundation of excellence

SWA BIOSOLIDS PROCESSING FACILITY
INDUSTRIAL WASTE FORCE MAIN PROJECT
PALM BEACH COUNTY, FLORIDA

LIFT STATION LANDSCAPE PLAN

ISSUED FOR:	DATE:	BY:
75% REVIEW	05/02/12	CEM
100% REVIEW	06/15/12	CEM
FINAL DESIGN	7–6–12	CEM
ENV. PERMITS	9/17/12	CEM

SWA

JOB NO.
NEF2001–01L

SHEET
L–1

© Wade Trim Group, Inc.

PROJECT MANAGER:–
C:\PW_WORK\MHORNE\D0346037\LLP–PLTS–LIFT STATION–01.DWG – L–1 – FIELD BOOK INFORMATION:–
PLOTTED 9/14/2012 11:05 AM BY HORNE, MICHAEL