


WELL NUMBER _____ BASIN 11D LAT. 29°48'38" LONG. 84°49'46" COUNTY Franklin DATE 4/30/79 PERMIT NO. _____LOCATION T Bs R 6W SEC 03 — $\frac{1}{4}$ of SE $\frac{1}{4}$ of NW $\frac{1}{4}$ MAP OR QUAD Green Point 1:24000OWNER Buckeye Cellulose ADDRESS CarrabelleWELL DEPTH 72 ft. CASED 52 ft. OPEN HOLE 20 ft. WELL FINISHED: SCREENED _____ OPEN HOLE ☒START OF LOG LSD 0 ft. TOP OF CASING TO LSD 10 DEPTH LOGGED TOP 4 ft. BOTTOM 72 ft. TOTAL FT. LOGGED 144CONDITION old - Flowing DATE DRILLED ? GROUTED ? DATE — CAPPED — TYPE OF CASING TK SIZE 3"FLOWING yes GPM ~1 HEAD .25 IN. TOP OF LS LSD 17' MSL -6' ELEVATION OF LSD TO MSL 11'

FORMATION _____ FORMATION TOP REFERENCE TO LSD _____ ft. MSL _____ ft.

AQUIFER Floridan WATER LEVEL REFERENCE TO LSD +1 ft. MSL +12 ft. ARTESIAN HEAD _____ ft.

TYPE OF LOG	INTERVAL TO	VERT. SCALE	HORZ. SCALE	DIRECTION LOGGED	SPEED FT./MIN.	REMARKS
Gamma w/ccl TC=2	4 72	1"20 ft.	200CPS	UP	20	
Caliper-Arms=	30 71	20	2-16	UP	20	
Temp w/ccl						
Fluid Resistivity						
Electric						
Flow Meter						
Sampler						
Neutron						

LOCATION:

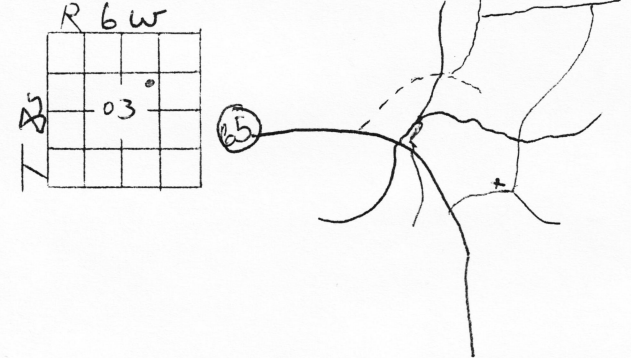USE OF WELL Anode _____ Drainage _____ Observation _____ Oil-Gas _____ Recharge _____ Test _____ Abandoned ☒ Withdrawal _____ Waste _____ Irrigation _____ Public Supply _____QUALITY WATER SAMPLE Yes _____ No ☒ Date _____ Depth(s) _____ pH _____ Salinity _____ Conductivity _____ Temp. _____ Chloride _____DRILLER ? TYPE OF RIG — PUMP INTAKE DEPTH NA TYPE OF PUMP _____ hp DRILLER SAMPLES _____Start of Logging _____ Finished logging _____ Total Time .75 hr. Operator/observer Kwader / LesterWell Accessibility dirt roads, near small stream

Lithological Summary _____

REMARKS: Abandoned 3" well near stream, Flowing wild. Plugging specs sent to Buckeye.

THIS LOG FOR HYDROGEOLOGICAL DATA ONLY - NOT FOR CONTRACTUAL SATISFACTION

NWFWM Form

FK-12
Buckeye Cellulose
4.30.79

40

50

CALIPER

- Bottom of Casing 52'

- T.D. = 72'

2"

4"

6"

8"

10"

12"

14"

16"

FK-12
Buckeye Cellulose
4.30.79

0

20

40

60

NATURAL GAMMA


- CLAY Confining Bed
- Top of Limestone 17'

High Bluff

- T.D. = 72'

Casing Collar Locator

FK-12
Buckeye Cellulose
4.30.79

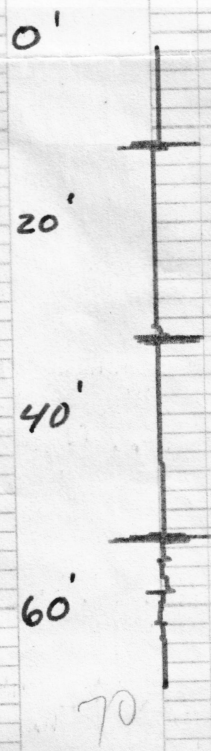

Bottom of Casing 52'

TD = 72'