


NWFD-2765

113

LN-72

WELL NUMBER _____ BASIN _____ LAT. 30°27'27" LONG. 84°11'11" COUNTY Leon DATE 2/12/80 PERMIT NO. 100/100
 LOCATION T IN R 1E SEC 25 SE $\frac{1}{4}$ of SE $\frac{1}{4}$ of NW $\frac{1}{4}$ MAP OR QUAD Lafayette, 1954 7' ☒ 15' ☐
 OWNER Robert F Gce ADDRESS 1213 Tung Hill Dr Tallahassee
 WELL DEPTH 214 ft. CASSED 124 ft. OPEN HOLE 90 ft. WELL FINISHED: SCREENED No SCREEN INTERVAL No OPEN HOLE Yes
 START OF LOG LSD 0 ft. TOP OF CASING TO LSD 1' DEPTH LOGGED TOP 0 ft. BOTTOM 214 ft. TOTAL FT. LOGGED 642'
 CONDITION New DATE DRILLED 2/10/80 GROUTED No DATE N/A CAPPED No TYPE OF CASING Steel
 FLOWING No GPM N/A HEAD N/A TOP OF LS LSD _____ MSL _____ ELEVATION OF LSD TO MSL 155 SIZE 4"
 FORMATION _____ FORMATION TOP REFERENCE TO LSD 64 ft. MSL +91 ft.
 AQUIFER Floridan WATER LEVEL REFERENCE TO LSD -134' MSL +21 ft. ARTESIAN HEAD N/A ft.

TYPE OF LOG	INTERVAL TO	VERT. SCALE	HORZ. SCALE	DIRECTION LOGGED	SPEED FT./MIN.	REMARKS
Gamma w/ccl TC=	4 214	1"20ft	0-100CPS	4p	25'/min	
Caliper-Arms= 18"	94 214					
Temp w/ccl	2 172	1"-20'	—	down	25'/min	
Fluid Resistivity						
Electric -16,64 Rp						
Flow Meter						
Sampler - Depth(s)						
Neutron						

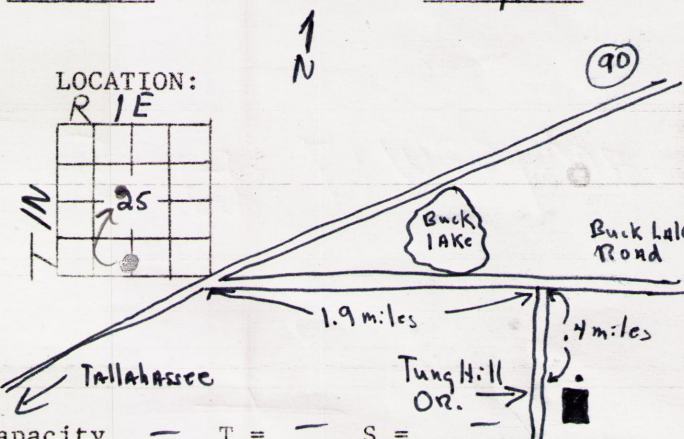

Pump Test info - Pumped @ N/A gpm static _____ pumping level _____ dd _____ specific capacity _____ T = _____ S = _____
 USE OF WELL Anode _____ Drainage _____ Observation _____ Oil-Gas _____ Recharge _____ Test _____ Abandoned _____ Withdrawal _____ Waste _____ Irrigation _____ Public Supply _____
 QUALITY WATER SAMPLE Yes _____ No _____ Date N/A Depth(s) _____ pH _____ Salinity _____ Conductivity _____ Temp. _____ Chloride _____
 DRILLER Moody Well Drilling TYPE OF RIG Cable tool PUMP INTAKE DEPTH _____ TYPE OF PUMP Sub hp DRILLER SAMPLES No
 Start of Logging 9:00 Finished logging 10:00 Total Time 1 hr. Operator/observer Pratt / _____
 Well Accessibility good
 Lithological Summary _____

REMARKS: well located on east side of Tung Hill drive, on top of hill, to the north of a hewn wood house.


THIS LOG FOR HYDROGEOLOGICAL DATA ONLY - NOT FOR CONTRACTUAL SATISFACTION

CALIPER

NWFD-2765

LN-72

2-12-80

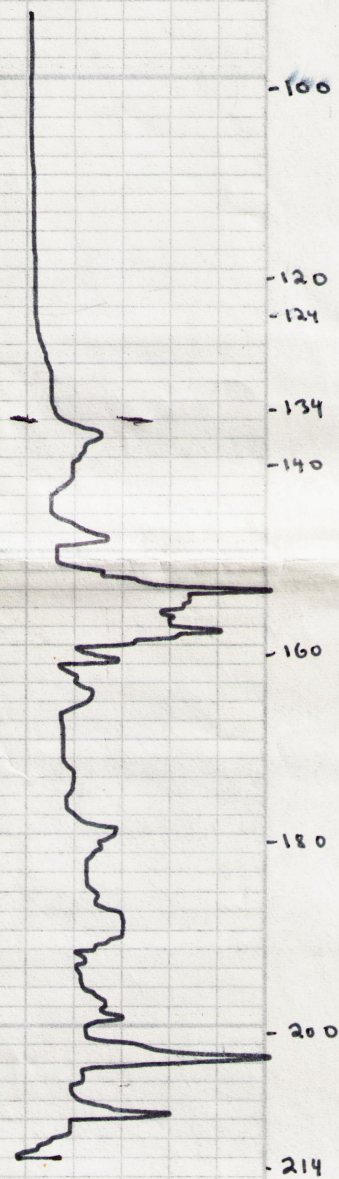

Bottom of casing 124'

Water level 134'

Total depth 214'

2"

4"

6"

8"

10"

12"

14"

16"

18"

0 cps Natural Gamma 100 cps L 0

NWFD-2765

LN-72

2-12-80


CLAYEY SANDS

CLAY

Soft Limestone

FIRM LIMESTONE
(Dolomitic)

FIRM - CLEAN
LIMESTONE

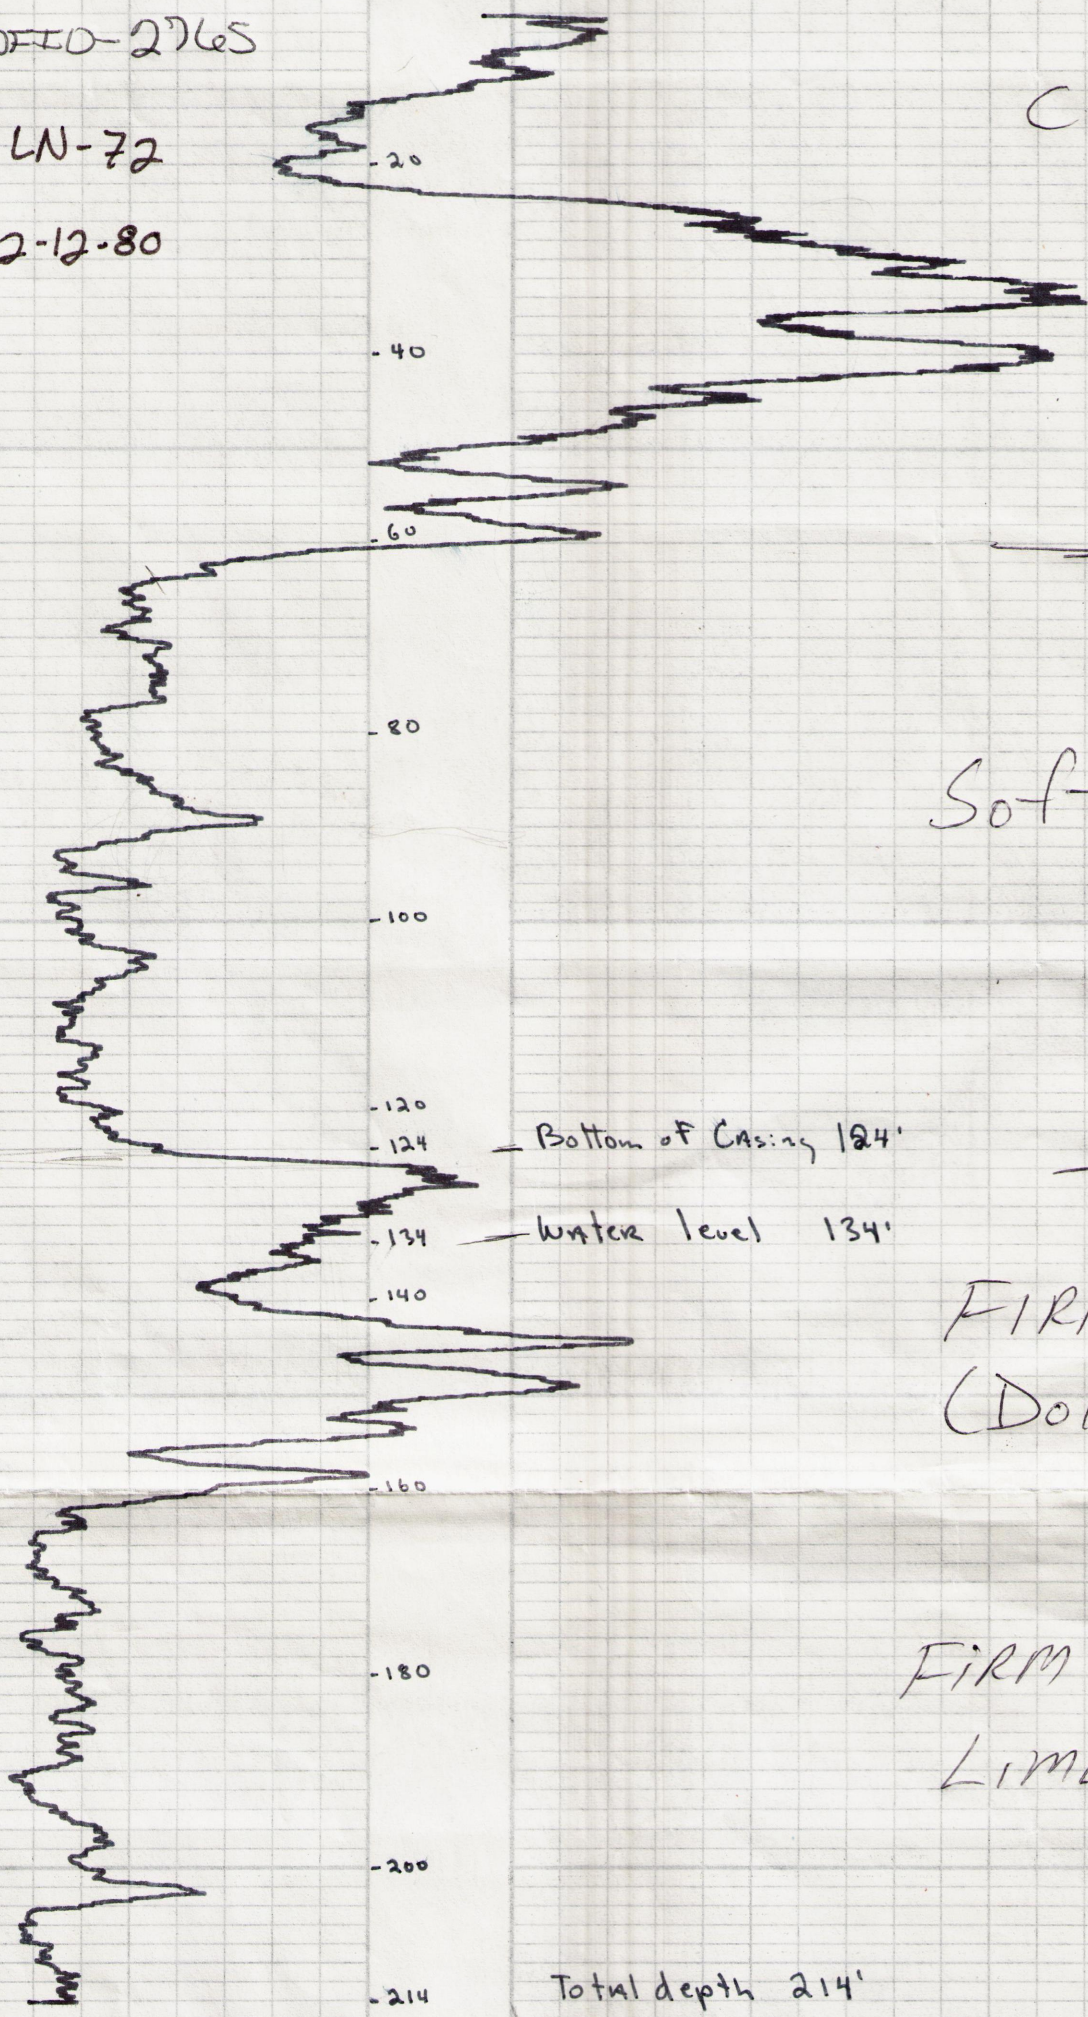

Bottom of Casing 124'


Water level 134'

Total depth 214'

Temperature log
NWFD-2765

LN-72

2-12-80

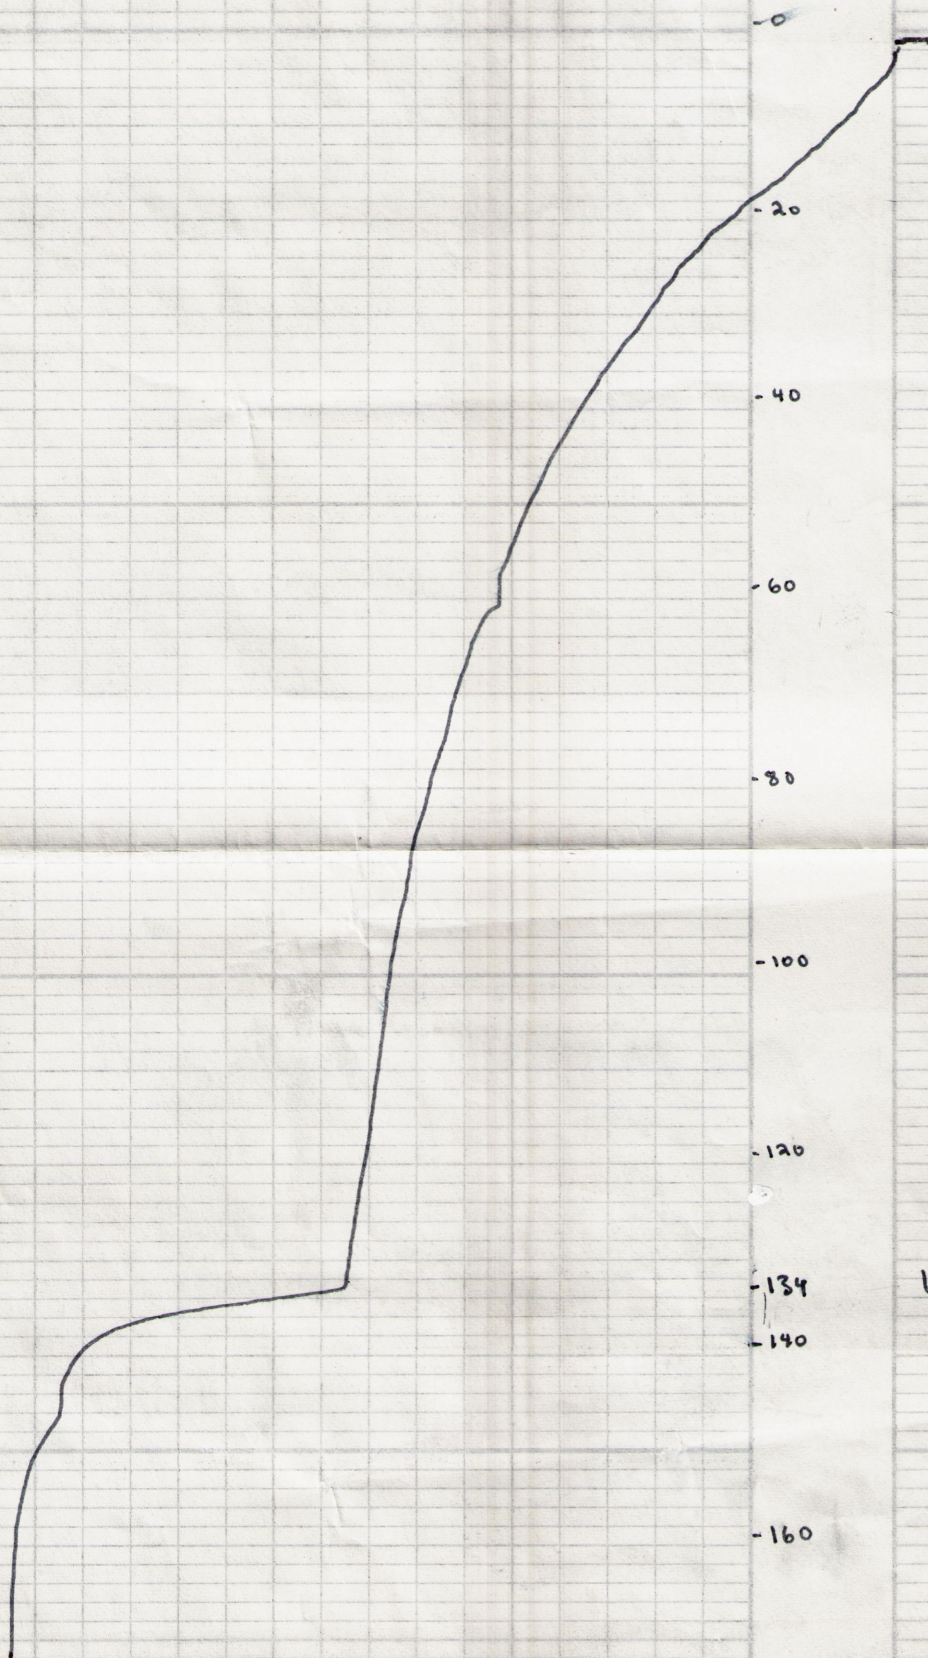

Water level 134'